SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1905, by Munn & Co.]

Vol. XCIII.—No. 7.
ESTABLISHED 1845.

NEW YORK, AUGUST 12, 1905.

8 CENTS A COPY.
$3.00 A YEAR.

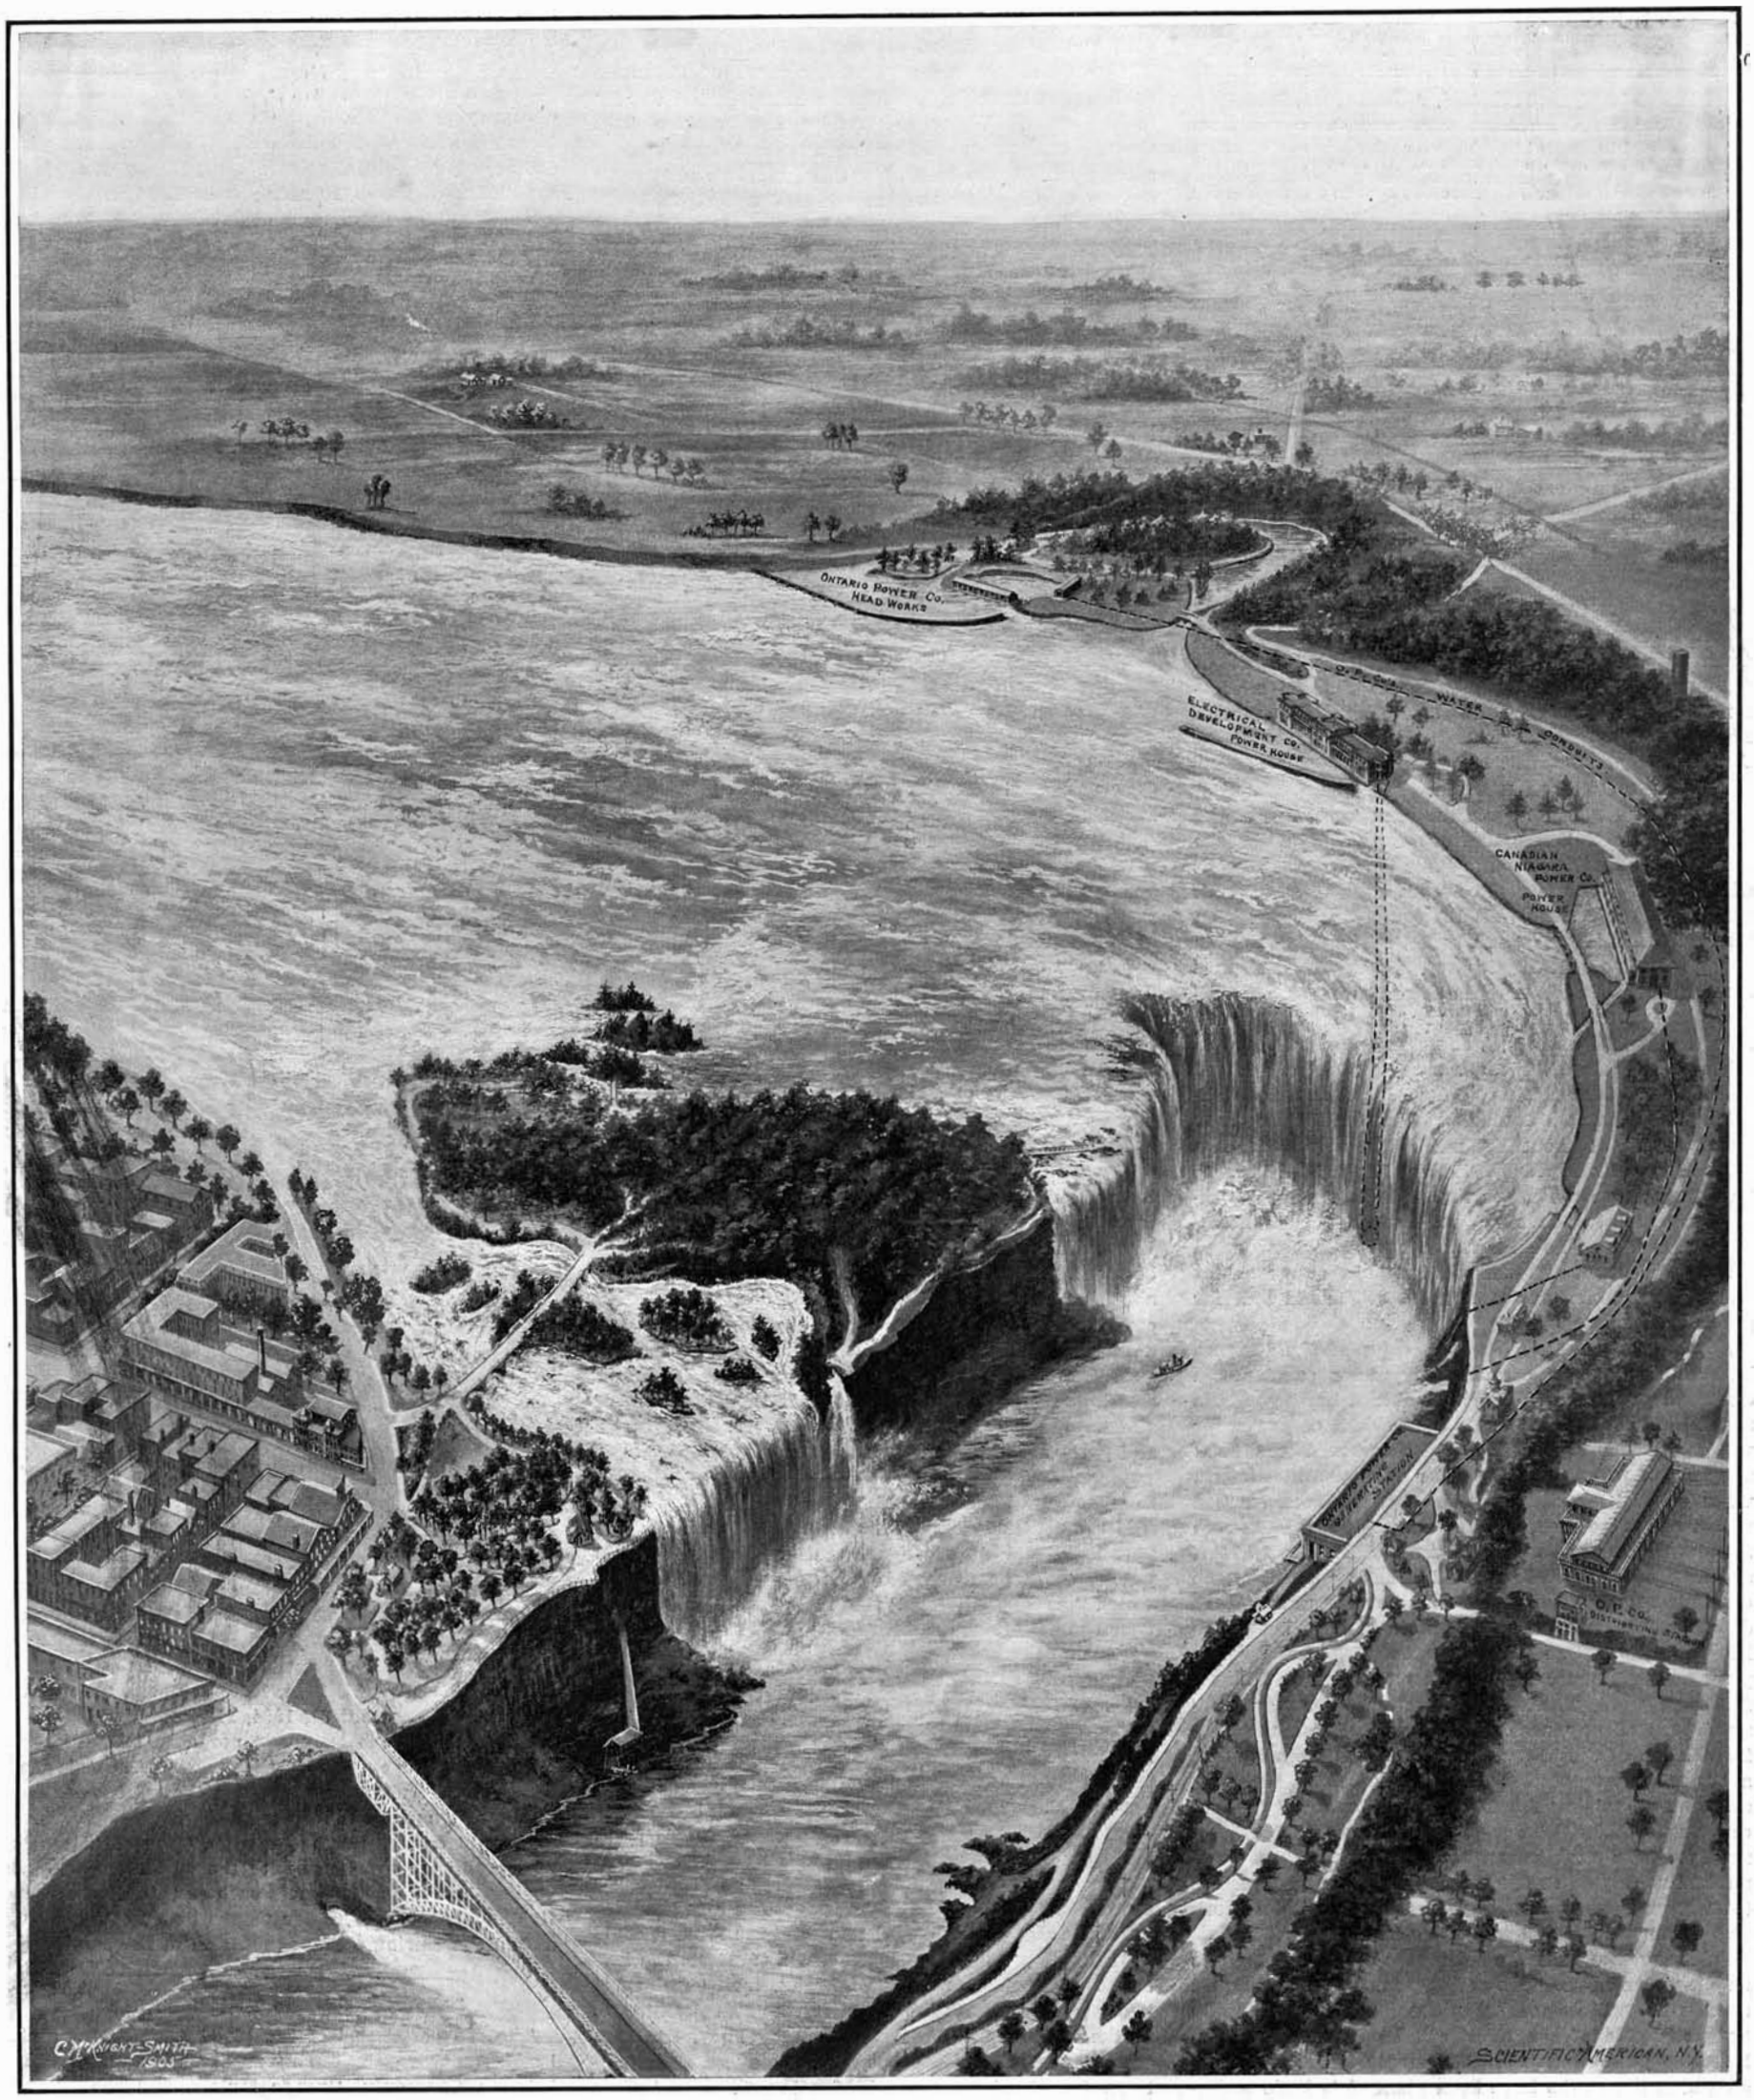
ONTARIO POWER CO. HEAD WORKS
ELECTRICAL DEVELOPMENT CO. POWER HOUSE
CANADIAN NIAGARA POWER CO. POWER HOUSE
ONTARIO POWER CO. TRANSFORMER STATION
C. McKNIGHT-SMITH 1905
SCIENTIFIC AMERICAN, N.Y.

Bird's-eye View of Niagara Falls and Vicinity, Showing the Location of the Three Great Power Plants Now under Construction on the Canadian Side for the Development of a Total of 415,000 Horse-Power.

ELECTRICAL POWER DEVELOPMENTS AT NIAGARA FALLS.—I.—[See page 126.]

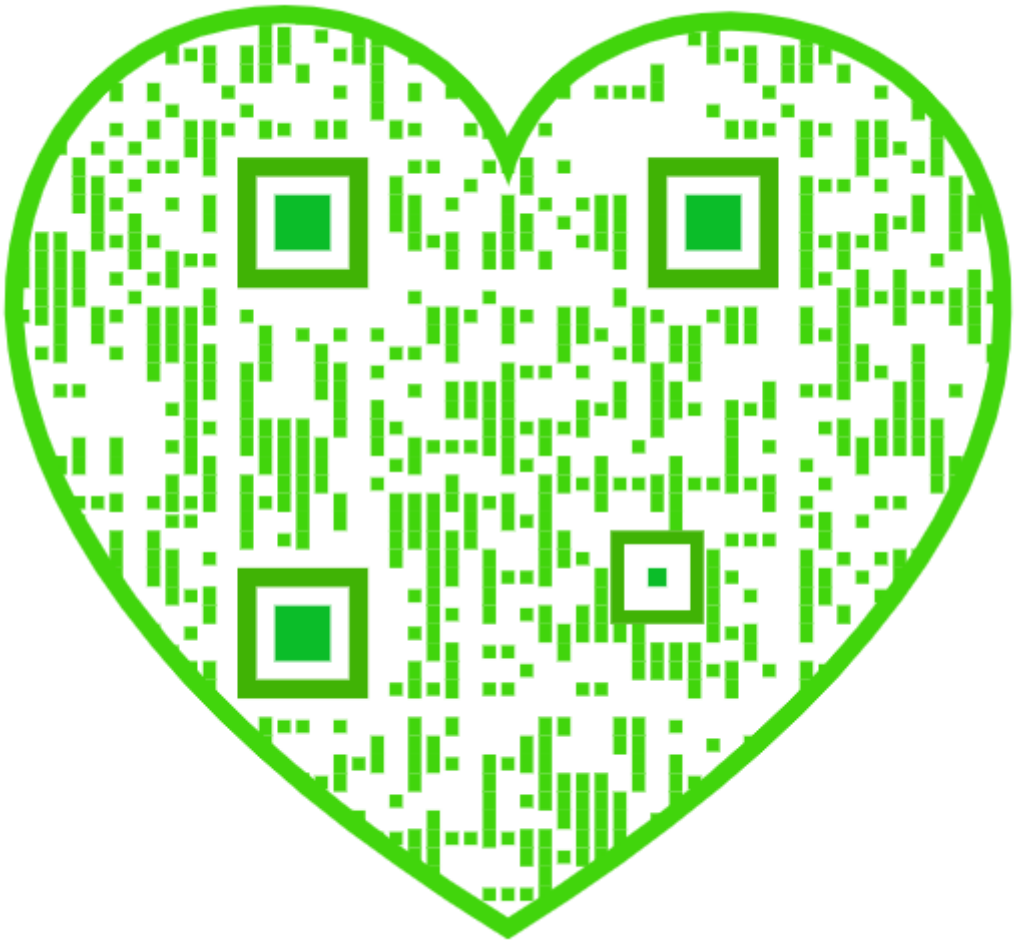

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO., - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year for the United States, Canada, or Mexico $3.00
One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845) ..... $3.00 a year
Scientific American Supplement (Established 1876) ..... 5.00 "
American Homes and Gardens ..... 3.00 "
Scientific American Export Edition (Established 1878) ..... 3.00 "

The combined subscription rates and rates to foreign countries will be furnished upon application.

Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, AUGUST 12, 1905.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

THE ELECTRIC POWER DEVELOPMENTS AT NIAGARA FALLS.

The Niagara River, in its course from Lake Erie to Lake Ontario, falls a distance of 327 feet. A survey by the United States engineers who measured the flow of the river below the falls shows that it discharges 230,000 cubic feet of water per second from the one lake to the other. By a simple calculation it appears that in its descent of 27 miles from lake to lake, Niagara River develops the equivalent of about 9 million theoretical horse-power. If the whole of this 230,000 cubic feet of water and all of its 327-foot fall could be utilized in hydraulic-electric power plants, it must not be supposed that 9 million horse-power would be available for the various industries that might wish to use it. As a matter of fact only about 4½ million horse-power would be available, the other 50 per cent of the theoretical horse-power being consumed in overcoming the roughness of the river channel, friction in canals, sluices, penstocks, draft-tubes, etc., friction in the water turbines, and losses in the process of electric generation and distribution.

The fall of the river from the commencement of the cataracts, about three-quarters of a mile above the Falls, to the river below the Falls is about 210 feet, of which 50 feet occurs in the Rapids and 160 feet in the great Falls themselves. This is equivalent to 5 million theoretical horse-power, or say 2½ million horse-power available for industrial purposes. Between the head of the Whirlpool Rapids and the lower end of the Whirlpool there is another fall of 90 feet, and it is estimated that the 230,000 cubic feet of water per second, in its fall through this distance (most of which is included in the stupendous Whirlpool Rapids), has a theoretical capacity which if transformed into available power would represent about 1¼ million horse-power. The total energy developed by Niagara River in its course from just above the upper rapids to below the Whirlpool is equal to about 7½ million theoretical horse-power, or, if we allow for losses by friction, electrical generation, etc., it represents 3,750,000 horse-power that would be available for use in the industrial and for general power purposes.

At the present time, on both sides of the Niagara River, there are in operation or under construction electrical power plants whose combined horse-power is about 500,000. If we include the amount of power for which charter rights have been granted the total amount of power which will be developed at Niagara when the full limit of these charters has been reached will amount to over 900,000 horse-power. In the SCIENTIFIC AMERICAN SUPPLEMENT of March 3, 1900, appeared a series of illustrated articles describing the development that had taken place at Niagara at that date. They included the 50,000-horse-power plant of the Niagara Power Company, and the 20,000-horse-power plant of the Niagara Falls Hydraulic Power and Manufacturing plant, which at that date were the only installations of any note. So successful was the first installation of the Niagara Falls Power Company, that a second power station of slightly larger size was commenced, raising the total power developed by that company to 105,000 horse-power. So quickly did these new ventures at Niagara establish their great commercial value that in the brief space of seven years the total development has increased on the New York side alone from 72,000 to 150,000 horse-power.

In the present issue we commence a series of articles on the present conditions at Niagara, in which the vast enterprises which are being carried through on the Canadian side of the river will be described and illustrated in full detail. The truly enormous scale on which the works have been planned is little understood, and it must come as a revelation to many of our readers.

It was inevitable the time should arrive when the public would be roused to protect Niagara Falls from the encroachments which were so rapidly being made upon it, and the fate of bills that were introduced at the last Legislature seeking further charter rights for the use of the Niagara water indicates that the public is well able to protect this splendid scenic feature from the absolute extinction which threatens to overtake it within the present generation.

THE CAUSE OF ACCIDENTS TO SUBMARINE BOATS.

In the course of an interesting lecture, recently delivered before the British Society of Naval Architects, relative to the subject of accidents to submarine boats, Capt. Bacon, the submarine expert to the British Admiralty, stated that, broadly speaking, submarine boats are liable to two classes of accidents—the admission of water into the interior, and explosion. Both have their counterpart in surface warships, namely, collision and boiler explosions or ammunition accidents. The confined spaces and small reserve of buoyancy of the submarine boat, however, intensify the danger to the crew. Water may enter a submarine boat through two causes—either through a hatch or through a leak, and in the case of such admissions protection can be exercised by the provision of watertight bulkheads. The most probable cause of water entering the boat is through a hatch, and in the four cases of foundering of submarines during the past few years the accidents have been attributable to this cause. The fact of the hatch being the primary source of weakness is very suggestive, and most reassuring as regards the safety of the boats; since, with the practical elimination of this source of danger, the main cause of accidents up to the present would be obviated. Of all the other possible causes of boats foundering from taking in water, it may be fairly claimed that the only one that was fairly possible was when the boat was injured by collision in the hull above the center line.

Only three causes of accident from explosion inside the boat are possible. To cause an explosion with gasoline, first a leakage is necessary, and secondly, a spark to ignite the mixture. A leakage, should it occur, can invariably be detected by the odor, but in a properly-designed system, leaks should be practically non-existent. Even with vapor in the boat no direct danger existed, provided the boat was properly ventilated and no switch was moved or anything done to cause a spark. As a matter of fact, in practise the smell of gasoline inside a boat was almost unknown.

In the accident to the British submarine boat "A5," where a gasoline explosion occurred, the cause of the leakage was a badly packed gland of the gasoline pump, the gland being screwed down metal to metal; but in spite of one man being overcome by the gasoline fumes the main motor was started, and the sparks determined the explosion. Had the very explicit and simple regulations provided been carried out, no accident would have occurred. The British boats have covered 30,000 miles under their engines and, with the exception of one small flash in an early boat, no explosion except that in "A5" has occurred. The second possible cause of an explosion is the hydrogen given off by the batteries in charging; but as this operation is only carried out when the boat is opened up for ventilation, no danger from this source should exist. The explosion which occurred recently in the British boat "A5," two hours after its foundering, was probably due to the formation of this gas. The third cause, namely, the failure of the air reservoirs, is but a mere possibility. It might, therefore, be assumed that danger to the boats from explosions is really small, and not greater in comparison than the dangers which attended the introduction of increased boiler and gun power in the navy as a whole.

AN EXCELLENT PRECEDENT.

If the attitude of the general public toward big corporations, and of these corporations to the general public, could be marked by the mutual consideration which has characterized the recent negotiations between the Merchants' Association and the New York Telephone Company, there is little doubt that the adjustment of rates and other debatable matters on a basis equitable to both parties concerned would, in many cases, be readily secured. How excellent are the results that have been obtained in the case in question may be judged from the fact that the New York Telephone Company has agreed to reduce its rates on direct lines from as much as twenty per cent for 600 messages to ten per cent for 4,500 messages. Under the new schedule, the old rate of $75 for 600 messages becomes $60, while for 2,400 messages the rate has been reduced from $165 to $135, and on 4,500 from $228 to $204. This gratifying reduction, which affects the boroughs of Manhattan and the Bronx, took effect some two months ago, and the credit for the reduction is due to the initiative of that most worthy body, the Merchants' Association, the list of whose successful agitations for the improvement of commercial and civic conditions of New York city is constantly growing.

It was in April, 1904, that the Merchants' Association took up with the New York Telephone Company the matter of telephone service and charges in this city, with a view to bringing about a reduction of rates in case it were found that the existing rates were excessive. The company offered to establish a new tariff if after a thorough investigation had been made it should be found that the company's profits exceeded ten per cent of the capital invested. Moreover they established a most notable and highly commendable precedent, by consenting to open their books and supply a committee of the Merchants' Association with all the necessary details of investment, gross earnings, operating expenses, and net earnings, as a preliminary to a readjustment of rates upon the agreed equitable basis, if such adjustment should be warranted by the facts disclosed by the investigation. The committee thereupon made provisions for an examination of the telephone company's accounts, and further examined personally and through experts into the financial and operating details of telephone management in this and such other cities as were germane to their purpose, with the result that the New York Telephone Company prepared and put into effect a new schedule of rates, some of the items of which we have given above, adjusted to the basis accepted by the special committee of the Merchants' Association as equitable.

The inquiry developed some interesting facts regarding the conditions of telephone service under varying conditions; and it was found that in all American cities having a population of over 50,000 there was a wide variation in the rates charged for telephone service. A close examination of the subject shows that a comparison of telephone rates in different cities fails to give correct deductions as to the reasonableness of rates in any given city. It was found that the outlay for labor, rent, taxes, real estate charges, etc., varies widely in the different cities of the world, those in America being much higher than those in Europe, and in America being much higher in large than in small cities. There are wide differences in the quality, range, and quantity of service rendered, particularly in the methods of charging for the service. There were differences also in the number of subscribers who take different grades of service. In 80 American cities having a population of over 50,000, the ratio of residence telephones to the total number of telephones varies from 15 per cent to 71 per cent; of party line telephones to total telephones from 4 to 84 per cent; of private branch exchange telephones to total telephones from 1 to 41 per cent, etc. There are also striking conditions peculiar to telephone business in large and small cities. In a small city a single central station suffices for prompt intercommunication between 2,000 or 3,000 users of individual stations. A single switchboard and single operator complete each connection called for, and the area served being comparatively small, the wire-mileage is relatively small. In large cities such simple conditions cannot, in the very nature of things, exist.

Ten years ago there were but 12,000 telephones in Manhattan and the Bronx. To-day there are more than 150,000. The system is by far the largest in existence, and is much larger than those of European cities of greater population. London, with a population of 6,580,000 in 1904, had 93,598 telephones, or 14.2 per 1,000 inhabitants. Paris, with 2,660,000 inhabitants, had 49,444 telephones, or 18.5 per 1,000 inhabitants. Berlin, with 1,931,000 inhabitants, had 66,744 telephones, or 34.5 per 1,000 inhabitants. But Manhattan and the Bronx, with 2,216,700 inhabitants, had the enormous number of 144,353 telephones, or 65.1 per 1,000 inhabitants.

A period of sixteen years was chosen by the Audit Company of New York for investigation, because it witnessed a complete conversion of the plant from an overhead single-wire system to an underground metallic circuit system, and again from the magneto-call local battery system to the automatic centralized battery system, as well as the great development of the system from some 12,000 to over 150,000 stations. Their investigation showed that the average percentage of net earnings to investment was as follows: For the fifteen years from January 1, 1889, to December 31, 1903, 10.89 per cent; for the sixteen years January 1, 1889, to December 31, 1904, 11.12 per cent, and for the year ended December 31, 1904, 14.54 per cent.

Of course no one supposes, nor does the New York Telephone Company claim, that this reduction is made on ground altruistic or Utopian, although the company is naturally solicitous for the good will of its vast number of patrons. As a matter of fact the reduction has been made in accordance with the well-understood economical law governing cases such as this, that a reduction in the price is, other things being equal, a sure means of securing a great extension of the service.

BLOOD CORPUSCLES ON MONT BLANC.

The red corpuscles of the blood have been counted by M. Raoul Bayeux during an ascension to Mt. Blanc, between Chamonix, Grands Mulets, and the summit. The samples were taken from the author and two other persons. After counting the globules at Chamonix, he made two determinations at Grands Mulets, the first shortly after arriving and the second the next day. At the Janssen Observatory, at the summit of Mt. Blanc,

the globules were counted after passing the night. The author then mounted to Grands Mulets alone from Chamonix and made another determination. He thus studied the action of a long ascension, the action of a short stay at a high altitude, then the passage to a still higher station, then a second ascension near the first. The red globules, diluted in Marcano serum, were numbered by a globule counter of the Malassey type, with a portable Zeiss microscope. He makes the determinations upon a quantity varying from 4 to 7 million globules, and forms a table from which he deducts the following conclusions: The blood undergoes a rapid and considerable increase in the number of red globules when we pass from one altitude to a higher level. If we remain in the latter place the first number of globules is found to diminish slightly, but not to a great extent in a few hours. Descending to the starting point makes the number diminish to a greater degree, but it is still above what it was before the ascension. He finds that a second ascension, made before the number has fallen to the original value, causes a new increase which is greater than is remarked in the first ascension. A subject who is acclimated to a greater degree is less subject to a change in the number of globules. This is the first time that the corpuscles have been counted at the summit of Mt. Blanc, which, it will be remembered, is the highest point in Europe.

A PRIZE FOR A NON-POISONOUS DIAMOND CUTTER'S COMPOSITION.

Considering the fact that the setting and resetting of diamonds for cutting purposes involves the use of an alloy, consisting of tin and lead, the handling of which has been ascertained to produce injurious effects, i. e., lead-poisoning, the government of the Netherlands has decided to open a competition under the following conditions.

The government desires a medium for the setting and resetting of diamonds to be cut—which need not necessarily be an alloy—the use of which cannot produce effects detrimental to the health of those handling the same, or an elaborate project of altering the method now in use, in such a manner that no such injurious effects can be produced.

The following requirements have further to be fulfilled:

1. The medium or the method must be practicable for all sizes and shapes of diamonds in the following branches of the diamond industry, viz., brilliants, roses, and so-called *non-recoupés*, now being cut in the Netherlands.

2. The application must be such as to be learned by the workmen, adapted to the present method of work, without any great difficulty, while the setting and resetting must not require more time, or considerably more time than is usual now.

3. The application and use must not entail considerable pecuniary outlay.

The Minister of the Interior has appointed a committee of experts to consider the answers submitted, and to award the prize. The answers must be written in the Dutch, French, English, or German language, and must be accompanied by samples or objects to enable the committee to form an opinion of the practical value of the invention, and also by a legibly written address of the competitor.

The answers, and the samples or objects pertaining thereto, must be sent carriage paid, and if sent from foreign countries duty paid, before January 1, 1906, to Prof. Dr. L. Aronstein, chairman of the committee, Chemical Laboratory of the Polytechnic School, Delft, Holland.

The prize to be awarded for a complete solution of the problem is six thousand florins. The committee is empowered to divide the prize among different competitors, or to award the prize partially in case of a partial solution of the problem, for instance if it is applicable to one of the above named branches of the diamond industry. The committee is also empowered to prescribe certain conditions, to be fulfilled by the competitor, before awarding the prize.

For the use of those who desire to enter the competition, the manner in which the diamond workers come in contact with the poisonous metal while engaged in setting and polishing is here briefly explained.

The metal, or solder, used, is an alloy, consisting of two parts of lead and one part of tin; by heating the composition becomes kneadable before melting; by cooling it regains its former firmness. This plasticity is an important property of the solder, as will be seen hereafter.

Before the polishing of the split and cut stones is commenced, they are given to the setter, who places them in a "dope," consisting of a nearly semi-spherical brass pan, into which a tough, thick copper wire is screwed. Into this pan solder is put, so that not only the pan is filled, but that a conical eminence is formed also, which is kneaded into shape.

When the solder is rendered kneadable by means of a gas flame, the "dope" is placed on a wooden block, called "verstelblok" (setting block); the diamond is then pushed into the top of the conical eminence by means of a pointed pair of iron pincers, so that only the facet or facets to be polished remain exposed; the setter then fastens the stone and smoothes the still plastic solder into shape with his unprotected fingers. The "dope" is then cooled and handed to the polisher.

Considering that one setter works for four or five polishers, and that about two hundred "dopes" have to be daily manipulated for each polisher (when the stones are very small this number is considerably larger), it is evident that the setter's fingers are constantly polluted with lead-laden particles, which easily attach themselves to the skin, while he is, moreover, exposed to the lead-laden fumes arising from the heating of the solder.

The polishing process is as follows:

The polisher is seated before a bench, in the center of which a metal disk is horizontally placed; this disk revolves rapidly on its own axis (about 2,400 revolutions a minute). The polishing medium consists of a mixture of pulverized diamond and olive oil. The "dopes," wherein the diamonds are fastened, are held by their copper wires in tongs, to which a fixed position in relation to the bench can be given; by bending the copper wire more or less the diamond is placed against the disk in the proper angle and is firmly pressed against the same by loading the tongs with heavy weights, for which purpose iron blocks are successfully used in Holland since 1904, instead of the leaden blocks that were used before them.

The friction occasioned by the polishing process creates a great heat, so that the "dopes" have to be repeatedly cooled. The "dope," however, never gets so warm locally that the solder turns soft, because it conducts heat well.

If the diamond were set in the cement (a mixture of resin, shellac, and sand), used in the processes of cutting and splitting, the "dope" would conduct the heat badly, turn soft, and the diamond would be immersed.

The constant manipulation, the ceaseless turning and bending of the "dopes" in the tongs (four tongs at least are being used on each bench), and also the fact that the stone and the solder-cone are wiped with the bare hand every time the polisher wants to see whether the facet has attained the required shape and size, are so many reasons why the polishers' hands are constantly polluted with particles of solder.

The way in which diamonds are cut and polished is therefore not without danger to the health of the workers. The setters and polishers are constantly in touch with metallic lead, which exposes them to the peril of chronic lead-intoxication, when no adequate precautions are observed.

Instances are given in the medical literature, a. o. by Dr. Coronel in the Netherlands' Medical Review (1864). Hirt, who verified Coronel's statement in 1870, relates that of ninety setters he examined in Mr. Coster's factory, about thirty showed traces of lead-poisoning. (Dr. L. Hirt, Die Krankheiten der Arbeiter, vide vol. i., die Staubinhalations-Krankheiten, p. 102.)

Dr. Pel, professor of medicine at the Municipal University of Amsterdam, has described a remarkable case of lead-poisoning in a diamond setter in the Centralblatt für innere Medizin, year 1897, No. 23. Dr. A. Norden, of Amsterdam, medical adviser to the Amalagamated Society of Diamond Workers (who examines the majority of the members of that society applying for sick pay), has had a large and varied experience on the subject. He drew attention to this important matter in the journal of the said organization, issues of June 28 and July 5, 1901 (Nos. 26 and 27).

PHOTOGRAPHING THE SOLAR CORONA.

BY J. W. DAVIDSON.

"Can a photograph of the solar corona be obtained without having to wait for the occurrence of a total eclipse of the sun?" is a momentous question in the astronomical mind at this time, especially in view of the approaching total solar eclipse which is to occur August 30, and to which eclipse expeditions are being dispatched. A distinguished scientist says: "Such a feat would be an astronomical discovery of the first rank."

It is now announced that Dr. Hausky, of the Odessa Observatory, in Russia, has succeded in obtaining such pictures from the summit of Mont Blanc and no less an authority than the veteran French astronomer, M. Janssen, who has seen the negatives, seems to be convinced that the actual corona has been photographed.

Dr. Hausky employed particular colored screens, through which he allowed the sunlight to pass before the image fell on the photographic plate. The negative thus obtained showed a nearly uniform halo around the solar disk. From this negative he produced a series of positives and negatives alternately, and treating them in a special manner he was able to produce the form and different degrees of intensity of the corona itself. The same form was constantly produced in spite of the changes in the position of the screens. On several occasions the problem has been considered solved, but further investigation showed that the image obtained was not that of the actual corona, especially in 1885-87—when a number of attempts were made to solve this intricate astronomical problem and a great deal was written on the subject at that time.

Now comes the suggestion which is the most plausible cause of renewed interest in the scientific world, of a probable solution of the problem; so great have been the improvements in photographic processes and in making colored screens, that it seemed quite possible that the object would soon be obtained.

Before, however, the problem can be considered solved it will be well to wait until the most crucial test can be applied, namely, that of photographing the sun by this means before or after a total eclipse, and then comparing the results with a picture taken during the eclipse with an ordinary camera. The test is a simple one, and the approaching eclipse of August 30 will present an early opportunity for carrying it out. Fortunately, the track of totality passes over some high mountains in the northern part of Spain, so that a high altitude is available.

SCIENCE NOTES.

Thus far it has been difficult to throw any light upon cell-absorption and selection in many complex natural relationships by calling in the assistance of the dissociation theory and the ionic relationships of the salts in the soil. The external relationships of nutrient salts, or the relative abundance of these in substrata supporting vegetation, constitutes a problem with which the physiologist must be concerned. It is necessary only to glance at the results of work done by various experiment stations in this country to be convinced of the great physiological importance which may be attached to such studies.

If, as has been well demonstrated, the germ of typhoid fever is transmitted principally in water, there seems no reason to doubt the ability of health officers, collaborating with broad-minded municipal authority and high-class engineering skill, to perfect means whereby this deadly germ shall be practically eliminated from our water supply. Consumption may be checked by the establishment of camps of detention where the unfortunate victims of this terrible disease may receive not only the highest degree of proficiency in medical treatment, but also be so segregated from the non-infected portions of the community as to render the spread of the disease difficult.

In point of quantity and value corn is the leading cereal crop of the United States. Its annual farm value in later years has nearly equaled and sometimes exceeded $1,000,000,000. While less subject to insect damage than wheat, the next most important cereal, the corn product would be considerably greater were it not for important insect pests. The work of several of these is obscure, and many farmers are entirely ignorant of the existence even of some of the worst enemies of this crop. In this last category falls the work of the corn root worm (*Diabrotica longicornis*), which ordinarily passes unnoticed, or at least is often misunderstood. The larva of this insect feeds on the roots of young corn, and in regions of bad attack may cause an almost entire loss of the stand. The corn root worm, together with one or two allied species working in substantially the same way, causes an annual loss of at least 2 per cent of the crop, or some $20,000,000.

Acccording to the annual report of the Royal British Observatory at Greenwich during the year ending May 10, 1905, 15,842 observations of transits were made of the sun, moon, planets, and fundamental stars. Great progress has also been made in the observation of the reference stars connected with the Greenwich section of the astrographic catalogue. This section extends from 65 deg. north declination to the North Pole, and in carrying out the measurement of the photographic plates, the accurate positions of 10,000 reference stars are desired. Of each of these stars five observations are desired, making 50,000 observations in all, and of this number 9,500 have been obtained during the past year. There now remain only five stars requiring three observations each, and 1,500 requiring one observation each, to complete the work; 603 double stars have been measured, 143 of these having their components less than one second of arc apart. A large number of photographs of Neptune and its satellite and 100 photographs of comets have been obtained during the year. The measurement of the catalogue plates for the Greenwich section of the International Astrographic Survey has been completed.

The losses occasioned by insects to farm products exhibit a wide range in different years, due, as a rule, to favorable or unfavorable climatic conditions, and also to the abundance, from time to time, of natural enemies. The result is more or less periodicity in the occurrence of bad insect years. In other words, periods of unusual abundance of particular insect pests are, as a rule, followed by a number of years of comparative scarcity. Furthermore, seasons which may be favorable to one insect may prove unfavorable to others, hence there may be not only periodicity in the occurrence of the same insect, but more or less of a rotation of the different insect pests of particular crops.

THE ASTROLABE OF REGIOMONTANUS.

BY CHARLES A. BRASSLER.

The subject of our present article, which we shall endeavor to describe as well as illustrate, is one of those intensely interesting instruments used by our forefathers for taking the altitude of the sun and stars at sea. It is the astrolabe of Regiomontanus, and it may still be seen in the Germanic Museum at Nuremberg. Who was this Regiomontanus? Johannes Müller by name, he was born at Königsberg in 1436, and he became an astronomer and mathematician of repute, in fact one of the greatest astronomers of the time, and like the great men of the day he affected the name of his native city, conferring thereby fame upon his birthplace, and assumed, therefore, the appellation *Regiomontanus*, meaning a Königsberger.

In connection with Bernhard Walther he built, in 1472, the first German observatory, where he conducted a series of the most exact observations with the beautiful instruments of his own invention and make, to which this astrolabe also belonged. A number of instruments of the kind that were employed upon shipboard sprang from his fertile brain; and it is certain that Columbus made use of the astronomical tables, compiled by Regiomontanus, for the determination of his whereabouts during his voyages and they must have played an important part in the later discoveries of the bold Genoese. It was Regiomontanus, too, who first studied the distances and motion of the comets.

Before the telescope was discovered, and it only came into use in 1610, all the practical astronomers busied themselves exclusively with measurements. To-day the telescope and the measuring instrument are combined and in this form the most exact observations of the stars are made possible; then the so-called *diopters* were employed and they had to be pointed at the stars. These were either tubes having small openings in either end through which one could see the star, or rulers of wood or metal, that carried at their lower end a perforated board and at the upper end a similar board used as a sight.

This method of observation, far from complete, required large and carefully-divided circles, that is, quarter circles or quadrants wherewith the height of the stars above the horizon or the distance between two stars could be measured; for the larger these quadrants the farther apart were the divisions representing degrees and as a consequence the more exactly was the operator enabled to read them off. Tycho Brahe, the great Danish astronomer of the sixteenth century, had worked with one of these large measuring instruments. According to Bürgel he had a huge quadrant let into a wall, called a wall quadrant, with a radius of more than three meters; the whole circuit of this immense instrument was nigh on to twenty meters. He was successful in obtaining very exact results with this. The astroblades were, however, much smaller, and also the results were greatly inferior to those obtained with the huge quadrants and octants. Indeed, they were never intended for the finest measurements. Since they were light and easily carried about, being from twenty to thirty centimeters in diameter, they were peculiarly adapted for seamen and travelers.

A clever observer such as Regiomontanus might obtain very exact measurements with a carefully-constructed astrolabe such as the one we show in the cut. The astrolabe was a sort of universal instrument. Not only could the height of a star above the horizon be measured by it and its distance from the zenith,

ASTROLABE OF REGIOMONTANUS.

but also many measurements, particularly the position of the sun, from which the local time and also the sidereal time could be obtained. When in use the astrolabe was suspended by the ring at the top or held freely in the hand so that the white line we see drawn across the face of the disk should fall exactly upon the horizon and in that way form the artificial horizon, while the vertical lines should be perpendicular to it. From this it is easy to see that an imperfect suspension of the instrument would lead to grave faults in the calculations.

The large disk, upon which the divisions of degrees are engraved, was made of metal; so also were all the other parts most carefully worked out of metal. *Mater* is the name given to the large disk divided into degrees. Inside of this is set a second metal plate, the so-called planisphere, and we can recognize it by the engraved net work. This net work comprises the degree-divisions of the heavens carried out upon a plane surface, hence the name (*sphaera*, the Latin word for a sphere, and *planum*, signifying a plane).

Above the planisphere lies the neatly cut out and decorated "rete" carrying upon its circular interior the constellations of the ecliptic. The pole of the ecliptic and the positions of some of the stars are also given.

Turning upon the axis of the whole we finally find the *diopter rule*, called also the "Alhidad rule," the pointed ends of which serve as indicators for reading off the degrees on the outer circle. Slightly removed from the ends and approaching the center we see the little sighting boards with their holes for vision. If now we desire to find the local time we must proceed as follows: Hang up the astrolabe so that the plane of the mater coincides exactly with the plane of the sun's rays. Then, looking through the two holes in the diopter rule, turn it until the sun can be seen. Upon the extreme circle the height of the sun may now be read in degrees at the point of the diopter nearest the eye.

Now look up in the tables the position of the sun, the sun's longitude for this day in the ecliptic, and, by turning the "rete," bring the point on the ecliptic of the sun given for this day into coincidence with the height of the sun as measured by the diopter rule on the outer scale. A special pointer on the "rete" will now indicate a figure engraved upon the disk, which will correspond with the sun's time at the moment of the observation. The astrolabe in its positive form was invented by Hipparchus in the second century before Christ and until the beginning of the eighteenth century it was occasionally used, even though it did not give very exact results.

A SAFETY BUFFER FOR AUTOMOBILES.

Collisions by an automobile, either with stationary or moving objects, nearly always result in a certain amount of damage being inflicted upon the motor vehicle. As a rule it is the front lamps, mudguards, and, occasionally, the front wheels which suffer. With the object of minimizing this danger, and also for protecting the obstacles with which the car happens to collide, a novel safety buffer has been introduced by the Simms Motor Manufacturing Company, of London. As will be seen from the accompanying illustration, the device consists of two short rim segments attached either to the front or side members of the chassis of the automobile. To this rim is fixed a short length of pneumatic cushion, fully inflated. Being placed well in advance of the front of the vehicle, the lamps, mudguards, and wheels are adequately protected, and the curved nature of the buffer tends to transform the impact into a glancing blow. Owing to the bracket carrying the buffer being of stout construction and fashioned in the form of a spring, there is little possibility of the buffer collapsing or buckling by the force of the impact with another object.

The device has been subjected to several tests when fitted to a 20-horse-power car. The working of the buffer is well shown in the accompanying illustration.

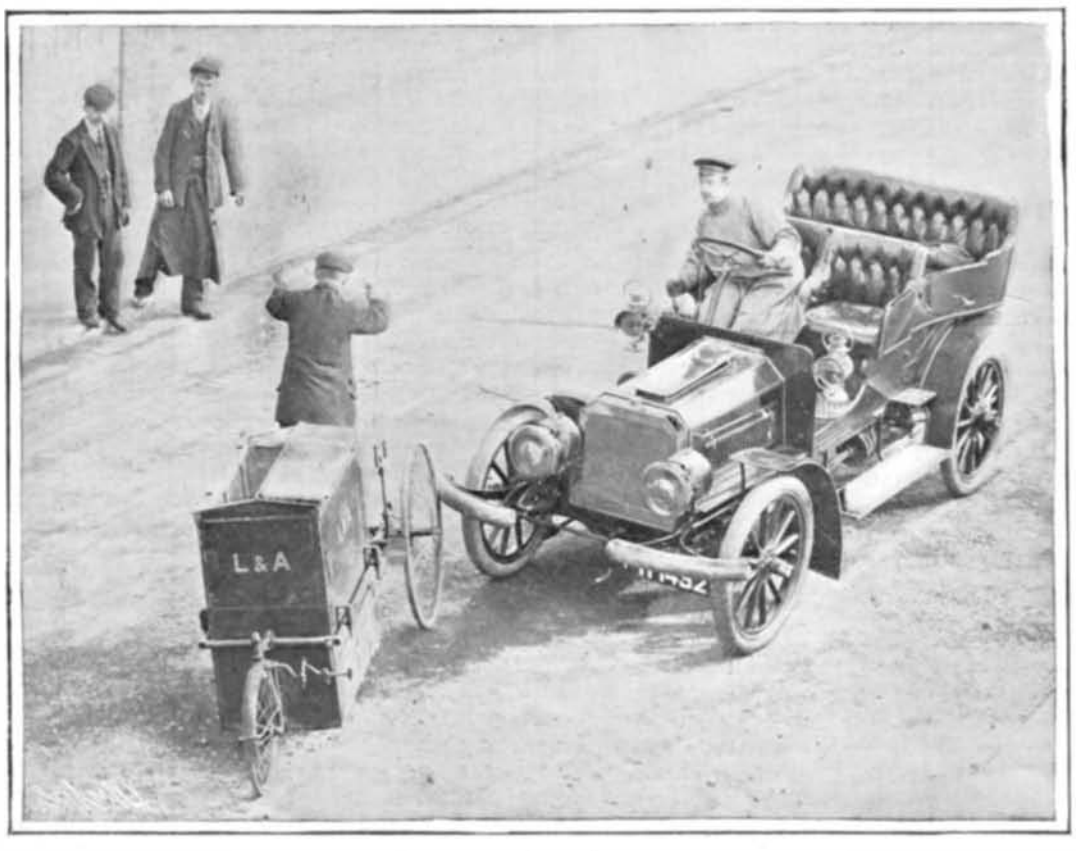

Car Equipped with Buffer Striking a Delivery Tricycle.

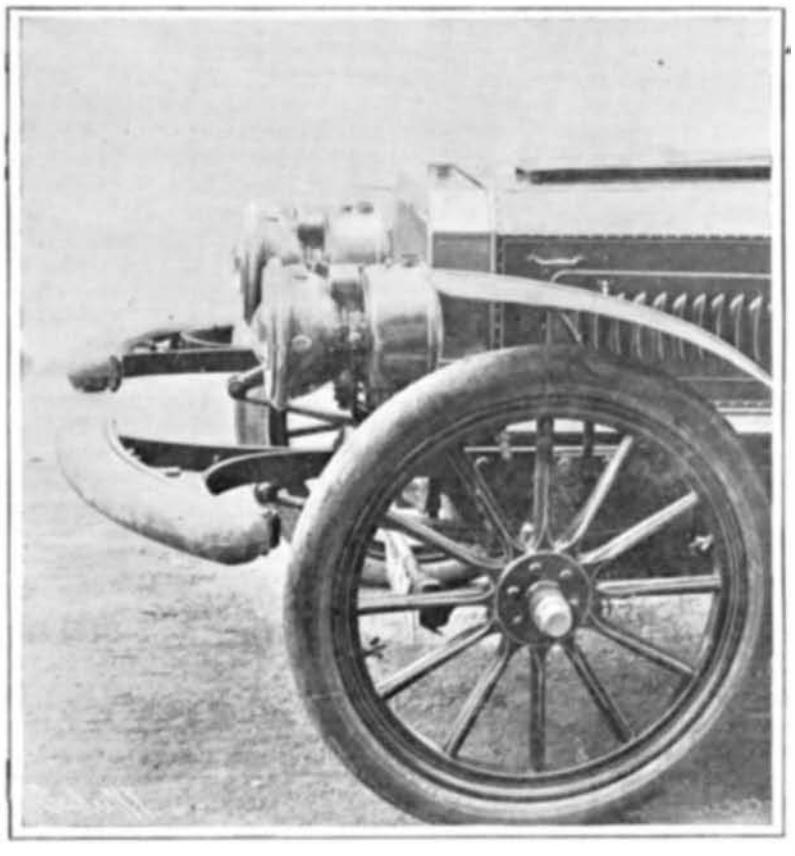

A Near View of the Buffer.

A NOVEL PNEUMATIC SAFETY BUFFER FOR AUTOMOBILES.

If the obstacle is of a light nature, it is deflected and thrown out of the track of the car. On the other hand, should the collision be with a stationary object, the pneumatic buffer serves to take up the force of the shock and will also deflect the trajectory of the car to which it is fitted.

The application of this safety device is also being extended to power boats, for which it is well adapted. It is more efficient and safer than the type of fender ordinarily employed, and the effect of a collision with another boat would be considerably reduced in character. The danger of ramming is entirely obviated owing to the broad surface offered by the buffers.

THE ELECTROLYTIC PRODUCTION OF HYDROGEN AND OXYGEN FOR WELDING PURPOSES

BY DR. ALFRED GRADENWITZ.

Though the oxygen-hydrogen process of welding has so far given rather satisfactory results and should seem to be destined to replace the expensive familiar riveting and welding methods, the price of the oxygen and hydrogen gases, as produced by chemical methods, has been a serious drawback to its general adoption. As gases were supplied in the compressed state in steel bottles, which after being emptied had to be returned, the considerable transporting cost and renting fees were added to their own high price, due to the compression of the gases.

Of late years there have, however, been designed a number of outfits for the electrolytical production of the oxygen and hydrogen gases by the decomposition of water, two of which have proved fully satisfactory in working, namely, first, the Schuckert apparatus, and second, the Oerlikon electrolyzer. The latter, which has been described in detail by the writer in the SCIENTIFIC AMERICAN, No. 27, vol. 91, is being constructed also by the Siemens & Halske Company, and consists of a number of separate chambers, containing plate electrodes of cast iron, which are separated from one another by diaphragms. The gases set free at the electrodes are led through various pipe systems to separators, to be completely freed from any water, which flows back again into the electrolyzer.

In the following we wish to dwell at some length on the Schuckert type of apparatus, which is now being constructed by the Electrical Company, formerly Schuckert & Co., of Nuremberg, Germany.

These electrolyzers, photographs of which are reproduced herewith, are exceedingly safe to operate, on account of their simplicity of design. All parts of the apparatus are readily accessible, there is no material superintendence required, while a cleaning made once or twice per year is quite sufficient to keep the apparatus in working order. The electrolyzer has been designed especially with a view to its use for welding purposes, supplying the gas immediately under the pressure required for welding, so as to necessitate no compression. As gas is derived from the gasometers for the welding, the latter are being filled up by the electrolyzers, the generation of the gases occurring with perfect continuity.

The apparatus, as can be seen above, consists of a cast iron tank, containing a number of cells, where the gases evolved on the electrodes are allowed to accumulate. Apart from the copper conductors, for supplying the current and from the insulation material, the apparatus is made up of iron throughout. A solution of 20 per cent caustic potash in water is used as electrolyte. A tension of from 2.3 to 3 volts is required for the operation of these apparatus, which are connected up either in series or in parallel, a proper amount of distilled water being filled in from time to time during operation. This is the whole of the superintendence required, in fact, no more than is necessary in the case of a storage battery of the same size.

The apparatus are protected against heat radiation by a sand layer about five centimeters in thickness, so as to maintain in the electrolyte a temperature of 70 to 75 deg. C., which is the most favorable, requiring the smallest potential difference for the decomposition of the electrolytic bath. The oxygen and hydrogen evolved by electrolysis are conducted each to a gasometer through separate pipes and thence to the neighborhood of the working place, there to be united in a burner, as they arrive in two separate

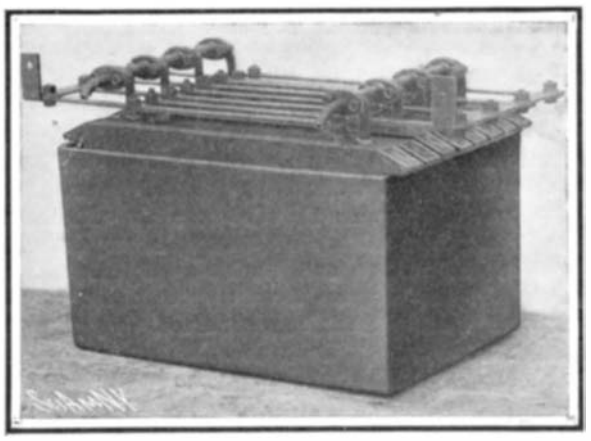

Apparatus for the Electrolytic Production of Oxygen and Hydrogen.

India rubber tubes, and to be burned in a pointed flame. This flame is carried over the sheets to be welded (which are applied to one another at an

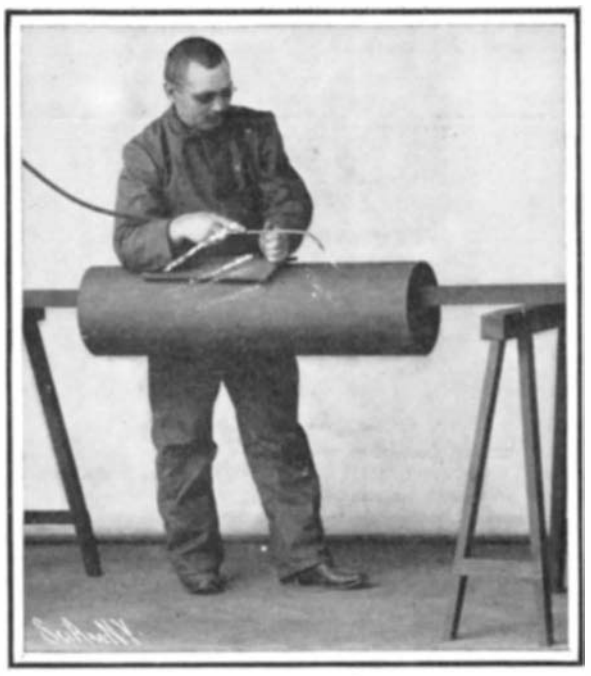

How the Oxy-hydrogen Flame is Used in Welding.

obtuse angle) like an ordinary soldering flame, but without the agency of any special soldering matter, when the surfaces applied to one another become perfectly melted together. In order to give an idea of the cost of operation of the electrolytic process as compared with the chemical method, it should be mentioned that whereas "chemical" hydrogen as purchased in bottles will cost between 1.20 marks and 2 marks per cubic meter, and one cubic meter of oxygen works out at about 2.50 marks to 3.50 marks (apart from the cost of transport and the renting fees) the aggregate cost of producing one cubic meter of hydrogen and one-half cubic meter of oxygen by the electrolytic decomposition of water in Schuckert electrolyzers (supposing an average price of electric power) will range between 60 and 75 pfennigs, including interest and amortization of the whole plant. Under normal conditions, the cost of producing the gas mixture necessary for the welding of 1 meter of sheet iron 3 millimeters in thickness, will be about 15 to 20 pfennigs and will be effected readily in ten to fifteen minutes.

The gases supplied by the electrolyzer are of a high purity and perfectly safe against explosion; their efficiency is quite satisfactory. The operation can be discontinued and taken up again at any time without interfering with the satisfactory working of the apparatus.

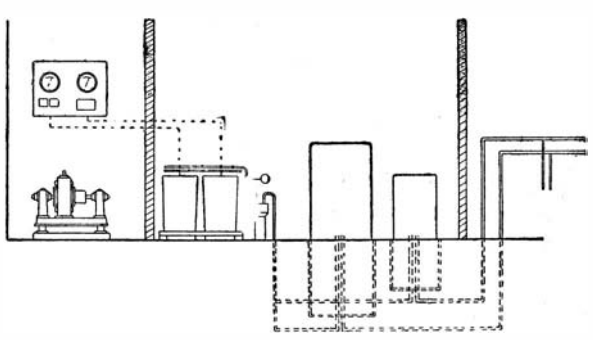

Diagram of the Plant for the Electrolytic Production of Oxygen and Hydrogen.

Large Plant for Producing by Electrolysis 42,378 Cubic Feet of Hydrogen and 21,089 Cubic Feet of Oxygen in 24 Hours.

THE ELECTROLYTIC PRODUCTION OF HYDROGEN AND OXYGEN FOR WELDING PURPOSES.

Electricity in Egypt.

The German Consul at Alexandria gives some information as to the use of electricity for various purposes in Egypt. In Cairo we find that lighting current is generated by a station which the gas company controls, but the public lighting is not developed as yet and only private lighting is operated at present. A tramway system is working in the city. It is owned by a Brussels company. Alexandria is using current for private lighting, but, like Cairo, has no public system. The tramway lines are controlled by an Egyptian company. To connect Alexandria with its eastern suburbs, a concession has been granted to the Alexandria and Ramleh Railway, which has lately adopted electric traction on the lines. The same English company are now operating the city tramway lines. Port Said now has an electric lighting system, which is newly installed, but there are no electric tramways. At Mansourah, the public and private lighting is conceded to an English company for twenty years, dating from 1899. At Suez the concession for the electric lighting in the town and also at Port Tewfik was given to H. Beyts & Co. in 1902, but has now passed into the hands of the Ismailiah Electric Company. It seems that gas engines are to be used to a considerable extent in Egypt in the future. Motive power is employed almost exclusively for irrigation. The most common type of machine is the portable locomotive, of English construction, but it takes a great quantity of coal, and this is very expensive in a country like Egypt. It seems that these machines can be very advantageously replaced by gas engines, which are much more economical, especially the latest forms, which are well adapted for use here, and consume only 1.3 pound of anthracite coal per horse-power-hour. Transport of force would be a great advantage in Egypt for operating the small irrigating machines. It will no doubt come into use soon, and a start has been made by a French engineer. He employs the engines of a cotton factory which is not always running, to operate dynamos and send current for working electric pumps to carry out the irrigation. On one plantation a Siemens-Schuckert electric plant gives power for motors. Prince Djemil Tussum has also adopted a German electric station on his property for the same purpose. It will be remembered that the gates of the celebrated Asswan dam are operated by Siemens-Schuckert electric motors. There is some question of using the cataracts of the Nile as a source of hydraulic power to operate electric plants and distribute current throughout a region which is now a desert, but which would be flourishing could the Nile water be taken through it. Thus the river would give the irrigation water and also the motive power. But this project is one which remains for the future to solve.

The Largest Flower.

Sumatra grows the largest flower in the world. It measures a yard and three inches across, and its cup will hold six quarts of water. *Rafflesia Arnoldii* is its name.—Philadelphia Bulletin.

THE NEW JERSEY TUNNELS AND SUBWAYS.

If the original company which undertook in the year 1874 the task of driving a tunnel from Jersey City to Manhattan beneath the Hudson River, and failed, could see the comprehensive system of subways and tunnels which is now being constructed by the Hudson companies, they would at least have the satisfaction of realizing that they had inaugurated one of the most important systems of underground railways in the world. When, in the year 1902, Mr. W. G. McAdoo resolved to take hold of the uncompleted tunnel and push it through to the Manhattan side, public interest in the scheme was altogether dead; but realizing how great was the advantage that would be conferred by a direct rail connection, and foreseeing how vast would be the growth in popularity of a means of transit that would be so much more comprehensive and expeditious than the ferry system, he not only succeeded in pushing through the original scheme, but he and his associates have extended it on the ambitious scale shown in the accompanying engraving. Briefly stated, the object of the subways and tunnels is to place the great terminal stations of the railroads, in Jersey City, in direct railroad communication with the various business centers on Manhattan Island, so that a passenger on arriving at any one of these terminals, can take a train which, in a few minutes' time, will land him without change of cars, either in the neighborhood of lower Broadway and Fulton or Cortlandt Streets or at any point on Sixth Avenue from Ninth to Thirty-third Street, or on Ninth Street from Sixth Avenue to Fourth Avenue. These tunnels will also afford rapid transportation for trolley-car passengers and for the thousands who walk to the ferries on the Jersey side from their homes.

The Jersey City terminals will be connected by a double-track system, consisting of two 15-foot tubes placed side by side, with a single track in each, which will extend from the Delaware, Lackawanna & Western Railroad, along the shore line to the terminal of the Central Railroad of New Jersey. At the D., L. & W. terminal the tracks will be near the surface, with the rails at a level of about 15 feet below street grade. From that point they will descend to 30 feet below street grade at the Erie terminal. At the Pennsylvania terminal they will be 70 feet below street grade; and from that point they will ascend to an elevation of 15 feet below grade at the terminal of the Central Railroad of New Jersey. At the point where this shore subway passes under the foot of Fifteenth Street, in Jersey City, it will be intersected by twin tunnels which will extend from Thirteenth and Fourteenth Streets and Provost Street to the subway, whence they will pass below the Hudson River to a station at Morton Street, in Manhattan. Thence they will be continued up Morton Street to Greenwich and Christopher Streets, where there will be a station, and thence up Christopher Street to a station at the junction of Ninth Street and Sixth Avenue. Here the system will branch into two separate pairs of tunnels, one of which will be carried below Ninth Street to Fourth Avenue to a connection with the existing Fourth Avenue Rapid Transit Subway. The other branch will continue north below Sixth Avenue, with stations at Fourteenth, Eighteenth, Twenty-third, Twenty-eighth, and Thirty-third Streets. The surface of the rail in these tunnels below Manhattan Island will be at an average depth of 33 feet below street grade. At Thirty-third Street the system will be in touch with the Pennsylvania Railroad tunnel across Manhattan Island, so that this portion of the road, or what is known as the Uptown Tunnel, will tap two important systems of underground travel, namely, the Rapid Transit Subway on Manhattan Island, and the Pennsylvania Railroad tunnels connecting with the whole of the Long Island Railroad system. The portion of the new tunnel above described, including the Jersey subway, as far as the Erie Railroad station, is being built by the New York and Jersey Railroad Company. The rest of the system, including the subway from the Erie terminal southward to the terminal of the Central Railroad of New Jersey, and the twin tunnels extending from the Pennsylvania Railroad terminal to Manhattan Island, with a loop on Church Street, is being built by the Hudson and Manhattan Railroad Company; and the contract for the construction of the whole of the work has been undertaken by what is known as the Hudson Companies. The downtown tunnel will consist, like the rest of the system, of two separate tubes with a single track in each. It will extend from the Pennsylvania Railroad terminal to Cortlandt Street, which it will follow as far as Church Street, below which it will pass in a loop, to return below Fulton Street and under the Hudson River to the Pennsylvania Railroad terminal.

In the earliest stages of the development of this enterprise, it was proposed to utilize these tunnels for running the steam railroad cars of the railroads terminating in New Jersey directly into New York; but as the present companies realized the full magnitude and importance of the enterprise, they very wisely determined to equip the system with the most up-to-date rolling stock and plant, designed especially for its use, and to follow in general the high class of construction which has been used in the Manhattan Rapid Transit subways. The rolling stock, therefore, will be entirely new. The cars will be large and brilliantly lighted; they will be constructed of steel and rendered absolutely fireproof. The protected third rail will be installed, and there will be a complete system of signals of the automatic and semi-automatic type placed throughout the whole line. In the subway on the Jersey City side and under Manhattan, where the service will be local in character, the trains will be run probably at about the same speed as those on the Manhattan Subway. In the tunnels below the Hudson River, however, where there are no stops, the trains will be run at express speed. This means that a passenger alighting, say at the Erie or D., L. & W. or, indeed, any of the terminals, can be in Manhattan in four or five minutes' time, and at Thirty-third Street, Fourth Avenue and Ninth Street, or at Fulton and Broadway, within from five to twelve minutes from the time he takes the tunnel train.

The present condition of the work is that, on the uptown tunnels, the north tunnel is completed from the shaft on the Jersey side to the shaft on the New York side, and the south tunnel is completed from the Jersey side to within 50 feet of the New York shaft. Work is also progressing on the approaches in New York. Of the downtown tunnels, the working shaft on the New Jersey side has been sunk, and the work of driving the two tunnels will shortly be under way, both tunnels being driven simultaneously. It is intended to use the shield method of construction with iron segmental tunnel lining for the whole of the system, not merely for that portion that lies beneath the Hudson River, but also for the subway beneath Jersey City and Manhattan. It is expected that the whole work will be opened to the public in from two to three years' time.

As showing the great activity in the work of connecting Manhattan Island with the mainland by tunnels, we have included on our map the tunnels of the Rapid Transit Subway and of the Pennsylvania Railroad that are now either under construction or have been authorized for construction by the Rapid Transit Commission. The most northerly of these are the Pennsylvania Railroad tunnels, which extend in the neighborhood of Thirty-third Street from New Jersey below the Hudson River, Manhattan Island and the East River to a station in Long Island City. These tunnels will not only give the Pennsylvania Railroad system a large terminal station in the heart of Manhattan Island, but they will place the network of railroads on Long Island in direct railway communication with Manhattan. The two Pennsylvania Railroad tunnels leading into Long Island will be below Thirty-second and Thirty-third Streets, and those which will extend to Jersey City will lie below Thirty-second Street. The other tunnel that is now under construction, is that of the Rapid Transit Road, which extends from the Battery below the East River to the foot of Joralemon Street.

The opening of the Rapid Transit tunnel and its remarkable success had the immediate effect of awakening a keen competition among capitalists to secure franchises for the construction of further subways and tunnels, both in Manhattan and Brooklyn. With commendable foresight, Mr. Rice, the present acting chief engineer of the Rapid Transit Commission, had prepared extensive surveys for future roads, and recently the Rapid Transit Commission and the Board of Estimate and Apportionment have authorized the construction of no less than nineteen different subways. Included in and forming part of these various routes are five tunnels beneath the East River. The first of these extends parallel with the Pennsylvania tunnels across the East River and connects with the crosstown subway below Thirty-fourth Street. Another tunnel has been authorized from Brooklyn to Fourteenth Street. This last has been laid out with a view to its probable use by the Brooklyn Rapid Transit. It will connect through the Subway below Fourteenth Street, with a loop system running from Fourteenth Street through University Place and Wooster Street to Canal Street and thence returning over the Manhattan Bridge to Brooklyn. This loop will provide a route by which the Brooklyn surface cars can pass over to Manhattan Island and return. The same Fourteenth Street Subway will form part of a loop for the Brooklyn Rapid Transit elevated cars which will run down Fourteenth Street to Greenwich, down Greenwich to Liberty, and through Liberty Street and Maiden Lane to return to Brooklyn by a tunnel under the East River from Maiden Lane to Pineapple Street. For the accommodation of the Belmont interests, should they be disposed to bid upon it, a subway and tunnel have been laid out from the loop below City Hall Park, through Beekman Street and under the East River to Cranberry Street, Brooklyn. Another tunnel, which will probably form part of the system of subways which the

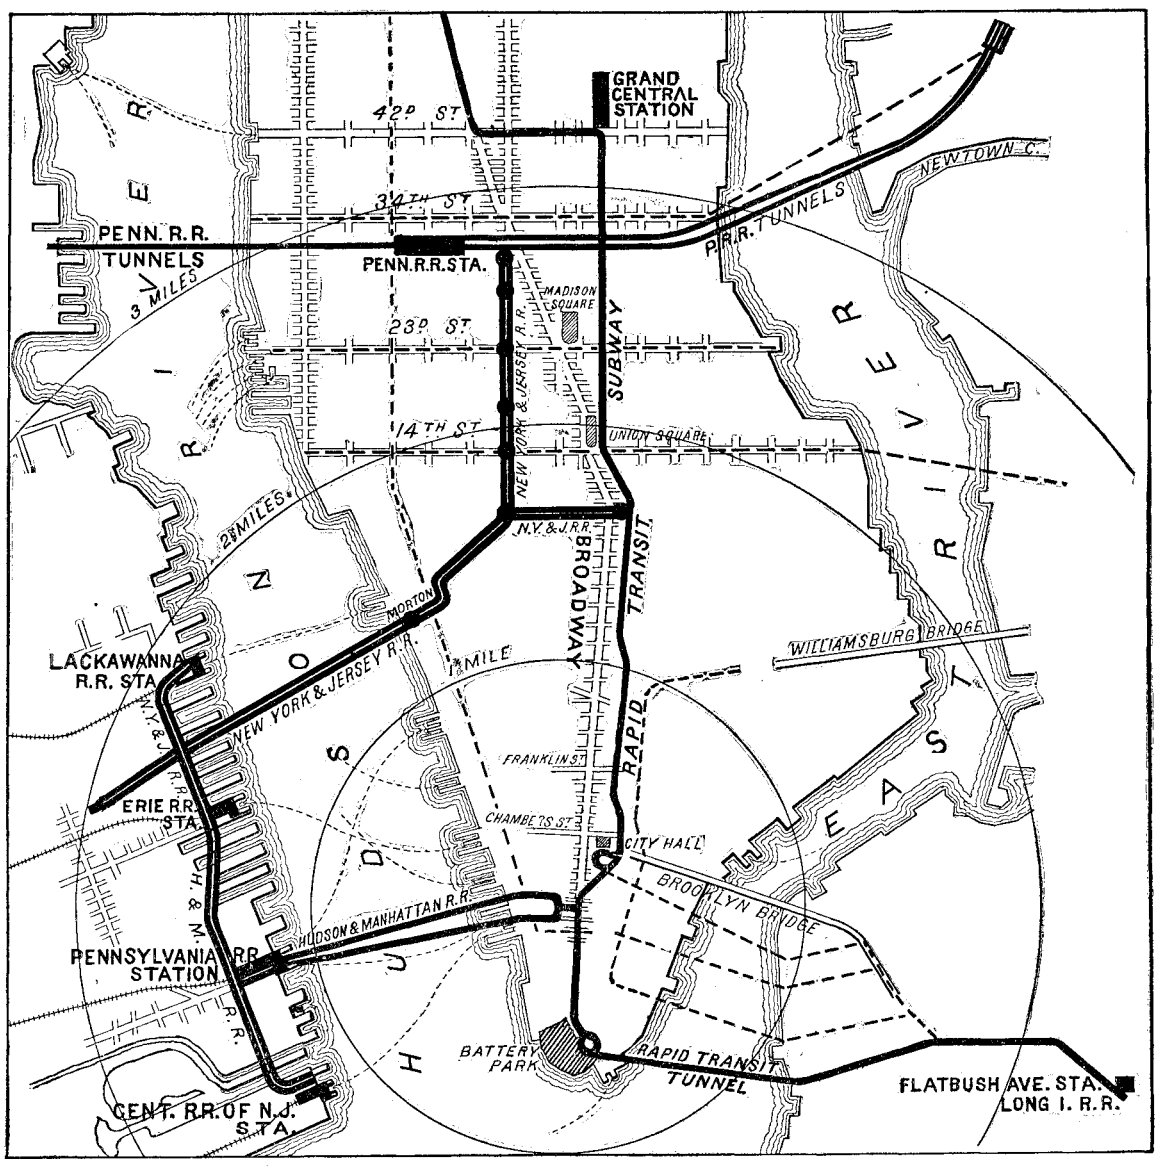

By this system a passenger, landing at any of the Jersey City railroad terminals, will be able to take a train direct to central points between Forty-second Street and the Battery. The five projected tunnels beneath the East River are shown in dotted lines.

MAP SHOWING THE NEW JERSEY TUNNELS AND SUBWAY; ALSO THE EAST RIVER TUNNELS RECENTLY AUTHORIZED BY THE RAPID TRANSIT COMMISSION.

New York City Railroad Company is anxious to build, will extend from Montague Street, Brooklyn, under the East River, to Old Slip, New York, to connect with a subway under William Street. It is probable that all of these tunnels and the connecting subways beneath the avenues and streets of Manhattan will be in a condition for bids by the spring of 1906, and although only a part of them may be undertaken at once, it is probable that before another decade has passed, everyone of the lines indicated on our map will be in active operation.

Engineering Notes.

About 1890, some railroads commenced to build small spans and plate girders of steel, and, for eyebars, steel was almost exclusively used. At that time most of the rolling mills, which had formerly manufactured wrought iron, were equipped with steel furnaces, but continued for some time to make both kinds of material, until they found it more profitable to confine themselves to the manufacture of structural steel only, and discontinued the manufacture of wrought iron. In 1894, it was practically impossible to obtain wrought iron shapes, and from that time forward steel entirely superseded wrought iron as the modern structural material. The year 1894, therefore, may be considered as the commencement of the present epoch—the steel age.

There are different methods of executing laboratory instruction in engineering schools, and these range from the complete written-instructions method, which might be carried out by any intelligent man, to the pure research method, in which a problem is assigned and no assistance given for solution except facilities of laboratory and library. Equipment for such laboratory instruction is also quite various in kind and excellence, but on the average represents large outlays of money for installation and maintenance. It is difficult to see how all the schools with variety of apparatus and method of using the same can accomplish the same ends, and it may be that much of our apparatus is useless, as charged by some English critics. From the discussion, however, it does seem that the aim of the instruction, or the object to be attained by the student, may justify both method and apparatus, and that old, worn or small pieces will suffice when the aim is to teach the commercial tests, in which case also the complete printed report form is satisfactory. When, however, it is the aim of the instruction to make useful engineers, in the highest sense, by sending out bold and clear-thinking men, well equipped with the fundamental principles and their application, then the modified research method in some form is absolutely necessary. In this case the great range of problems and variety of the scientific foundation material make the most complete laboratory none too good nor need any part of it lie idle for want of usefulness.

At a recent meeting of the Belgian Electrical Society, J. Carlier reviews the different apparatus which have been designed for taking the speed of locomotives. The "kinemometers" of Richard and Jacquemier are not easily applied to locomotives, on account of the fragility of the different parts of their mechanism. But for experimental cars they have a better chance of succeeding, as the latter are less subject to heavy shocks. M. Hayne has devised a registering speed indicator for locomotives which is of strong build. It has a revolving disk, which turns proportionally with the time by a clockwork movement. It works by friction against a roller, which is mounted on a shaft carrying a screw-thread. The screw works in a nut, which is drawn in the opposite direction by the movement of the car wheels. Thus the roller moves over the disk at a distance from the center which is proportional to the speed. The Hausschelter register is used to indicate upon a dial, in front of the engineer, the speed of the locomotive in miles per hour. Besides, it registers on a band of paper, which rolls out proportionally with the time, the speed, the duration of the run, and of the stops. When the speed exceeds the proper limit, a bell is rung. Dr. Hasler, of Berne, has devised an instrument which may be an improvement on the above. It is a totalizing speed counter, indicating the speed at intervals of time which are three times nearer together than the above instrument. It registers the speed of the train, the total time of the locomotive, the length of the distance passed over, and is also to be adapted for recording the air-brake pressure. The speed of the train is represented by an irregular curve, which utilizes nearly the whole width of the paper band, and the point works every three seconds. In the Pennati tachymeter, the pencil-holder is raised along a vertical rod by means of a half-nut running upon a screw. At intervals of twenty seconds an electro-magnet works the pencil lever, so as to separate the nut from the screw. The speed is taken by a wheel running upon the rail, and its shaft operates the gearing of the apparatus. Electric tachymeters have been made, but these have not been applied with much success upon locomotives, excepting the Scholkmann system, which has been used on the Prussian state locomotives.

A NOVEL OIL CAN.

Pictured in the accompanying engraving is an oil can of novel construction recently invented by Messrs. Frank W. Clow and Joseph Brooks, of Livingston, Mont. The oil can is of the type used in oiling locomotives and large machinery, in which a long spout is provided to permit of reaching parts which would be inaccessible if the ordinary oil can were used. One of the principal objections to oil cans with long spouts is that in reaching distant bearings or oil cups, a large amount of oil is usually spilled out before the nozzle can be inserted to the desired spot, because, owing to the length of the spout, the can must be tipped up to pass between the various parts of the machine. The present invention seeks to overcome this objection by providing a valve which normally closes the spout, so that the can may be entered into the machinery without spilling a drop of oil, and then when the proper bearing is reached, a thumb piece is depressed, opening this valve and permitting the oil to flow out. In our illustration the spout of the can is broken away, and also a portion of the body of the can, in order to bring out the details. A portion of the upper end of the spout, with the nozzle screwed on, is represented in Fig. 2, and shows the valve that closes the end of the spout. The valve stem passes down through the spout to the bottom of the can, where it is bent upward again to pass through an air-inlet tube to the outside of the can. Here the valve stem terminates in a thumb piece. The bottom of the air-inlet tube is closed by a second valve formed on the same valve stem. A coil spring on the tube is connected to this valve and serves normally to hold it and the flow valve closed. When the thumb piece is depressed, both valves are open and air enters the can through the tube to replace the oil which passes out of the spout. An inverted conical strainer is set into the mouth of the can to exclude all foreign matter from the spout. This strainer is attached to the cap which carries the spout and also the inlet tube, so that the entire mechanism may be removed by unscrewing this cap, and this leaves a large opening through which oil may be poured in without danger of spilling. The construction is such that the oil will not collect in and clog up the spout; but if the valve becomes clogged in any way it may be readily cleaned on unscrewing the nozzle from the spout.

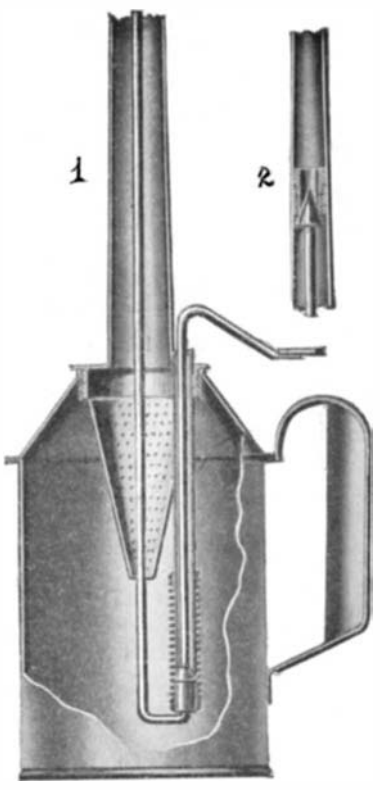

A NOVEL OIL CAN.

Official Meteorological Summary, New York, N. Y., July, 1905.

Atmospheric pressure: Highest, 30.17; lowest, 29.58; mean, 29.97. Temperature: Highest, 96; date, 18th; lowest, 61, date, 27th; mean of warmest day, 86, date, 18th; coolest day, 66, date, 23d; mean of maximum for the month, 82.6; mean of minimum, 68.3; absolute mean, 75.4; normal, 73.9; excess compared with mean of 35 years, + 1.5. Warmest mean temperature for July, 78, in 1901. Coldest mean, 70, in 1884. Absolute maximum and minimum for this month for 35 years, 99 and 50. Average daily deficiency since January 1, — 0.4. Precipitation, 6.01; greatest in 24 hours, 2.74, date, 10th and 11th; average of this month for 35 years, 4.51. Excess, + 1.50; deficiency since January 1, — 1.71. Greatest precipitation, 9.63, in 1889; least, 1.26, in 1893. Wind: Prevailing direction, south; total movement, 7,358 miles; average hourly velocity, 9.9 miles; maximum velocity, 46 miles per hour. Thunderstorms 8th, 9th, 10th, 11th, 13th, 19th, 20th, 30th, 31st. Clear days, 5; partly cloudy, 17; cloudy, 9.

The celebrated grape vine in the conservatory at Hampton Court, England, planted in 1769, had in 1830 a stem 13 inches in girth and a principal branch 114 feet in length, the whole vine occupying more than 160 square yards; and in one year it produced 2,200 bunches of fruit weighing on an average a pound—in all, about a ton of fruit.

Correspondence.

New Nomenclature.

To the Editor of the SCIENTIFIC AMERICAN:

Permit me to suggest two names for new "articles" in daily use.

1. Kinetograph: A photograph or series of photographs for use in kinetoscopes or like machines.

2. Aerogram: A message sent by wireless telegraphy.

C. G. DICKSON.

Washington, D. C., August 3, 1905.

The Danger of Lightning in Armored Concrete Constructions.

It is a well-known fact that any constructions made entirely of iron are practically immune against the effects of lightning, as the amount of electricity accumulated in the case of a lightning stroke is allowed to distribute itself over the large surface of the roof, and to flow off to the earth at many places with greatly reduced intensity. As pointed out in a recent article in Beton und Eisen, conditions are quite similar in connection with buildings made entirely of armored concrete, as the discharging current will find the roofing iron and distribution rods of an armored concrete roof, struck by lightning, a good conductor of electricity, so as to flow off to the more substantial girder iron with which the roofing iron is connected by wire meshes. Now, as experience has shown lightning not to be discharged to the earth in a concentrated jet from the place of striking, but to have a tendency to distribute itself to all sides if possible, the electricity will be diffused throughout the roof traversed by a network of iron rods. The electricity being greatly reduced in intensity, will have an excellent opportunity of flowing off to the ground through the round irons inserted in armored concrete columns, thus being communicated to the foundation of the current column, which in turn transmits it to the ground. This shows that neither artificial lightning arresters nor their parts will be required in connection with any construction consisting entirely of armored concrete.

Tests with Haulage System to Economize Air.

At the Fürstlich von Plesschen Colliery, in lower Silesia, electricity has been used extensively underground, but with the idea of avoiding firedamp explosions it has been found necessary to use air motors in all such places that were in the return air-way, or such places that were not directly reached by fresh air. The installation at the Fürstensteiner mines is very extensive, and owing to the use of coal cutters these latter mines have been provided throughout with air mains, and to connect with this system was convenient, whereas it would be necessary to use lengthy cables should the introduction of electricity be contemplated. The material that is derived from the seam or measures having a thickness of 23 feet must be hoisted on the incline and for this purpose it is necessary to use a motor of some kind. The system which has here been introduced is the endless-rope system so that whatever motor is used it can run continuously. A duplex air hoist of the ordinary type with slide valves, is installed but it is impossible to use a cut-off so as to expand the air to any great extent on account of the formation of ice in the exhaust. The motors, therefore, do not work economically and use a great deal of air. To overcome this, as has been tried in other districts, the use of reheating was not deemed advisable on account of the danger from explosions.—Translation of article in Gluckauf, Mines and Minerals.

The Current Supplement.

The current SUPPLEMENT, No. 1545, is commenced with an interesting article on "The Kazarguene Bridge." This Russian bridge is the longest reinforced concrete bridge in the world. "The Steam Turbine As Applied to Electrical Engineering" is by the Hon. Charles A. Parsons, and Messrs. Stoney and Martin. "The Winning Automobiles in the Sixth International Cup Race for the Bennett Trophy" describes the Italian cars. The usual scientific, electrical, and engineering notes will be found in their accustomed places.

John Carbutt.

John Carbutt died July 28 at his home in Philadelphia, aged seventy-three years. Mr. Carbutt went to that city from Sheffield, England, in 1853. He was a chemist, and made scientific photography his life study. The Photographers' Association of America chose him as its first president. He made several inventions, chief of which was the orthochromatic plate. In 1879 he perfected the Carbutt dry plate.

Probably the first iron railroad bridge was built on the Philadelphia and Reading Railroad at Manayunk by Richard B. Osborne, Chief Engineer, in 1845. It was a double-track through bridge, of 34 feet clear span, of the Howe truss type, with cast-iron chord and web braces, the bottom chord and vertical web members being of wrought iron. This bridge was followed by several others of the same type.

THE "BENNINGTON" DISASTER.

The history of the United States navy does not furnish an instance of sudden disaster that appeals so directly to our sympathies as the recent tragedy on the United States gunboat "Bennington;" for although the explosion on the "Maine" in Havana harbor resulted in a greater loss of life, it was known that the ship was engaged on a mission that might end in actual war conditions, and there was, therefore, a proportionate sense of risk attached to it. In the present case, however, the trim little gunboat was about to start on a peaceful mission, and the thought of disaster, and disaster of such an appalling magnitude, was far from the thoughts of any one of the ship's company.

The "Bennington" is a two-masted schooner built by N. F. Palmer & Co., Chester, Pa., in 1890. She is of 1,664 tons displacement and on trial made 17½ knots, with 3,436 horse-power. She carries six 6-inch breech-loading guns, four 6-pounders, four 1-pounders, and two Colts. She is known as an unarmored steel gunboat, her protective deck being only ⅜ of an inch in thickness. She cost originally $490,000, and she carries a complement of eleven officers and 176 men.

At the time of the accident, the "Bennington" was lying in San Diego harbor, and in obedience to orders just received from the Navy Department at Washington, to sail that morning for Port Harford to meet the monitor "Wyoming" and convoy her to San Francisco, she had steam up and was in readiness for departure. Suddenly, without, as far as is known, any preliminary warning whatever, the starboard forward boiler exploded, the top of the lower furnace giving way, and the rush of steam drove the boiler against the boiler astern, which was also forced astern and exploded. As practically the whole complement of the ship was aboard and the majority of the crew were located amidships and forward, the casualty list was a shockingly large one, nearly half a hundred men being killed outright, and a large number of others so seriously wounded that the ultimate number of deaths will probably be not far short of seventy-five. The wrecking of the interior, breaking of valves, etc., caused the vessel to sink, although she was located in such shallow water that she can probably easily be salved.

In view of the fact that Secretary Bonaparte, of the navy, has appointed a special board to make a very thorough investigation, it will be idle and premature to enter into speculations as to where the blame for this shocking disaster is to be laid. It is stated that within the last ten months the Scotch boilers of the "Bennington" have been inspected at least three times, and repairs have been executed which were considered sufficient to keep them in service for a few months longer until new boilers could be given her. If the repairs were adequate there is nothing unusual in this course. At the same time there seems to be little doubt that this ship, like many others in our navy, was suffering from a scarcity of officers, particularly in the engineering department.

The following discussion of the type of furnace and boiler used on the "Bennington" and its possible bearing on the disaster is from the pen of Mr. Egbert P. Watson, one of the former editors of the Scientific American:

In order to understand the accident clearly a few words of explanation are necessary. The furnaces of marine boilers of the Scotch type are tubes usually four feet in diameter in large boilers and three-quarters of one inch thick. They are corrugated diametrically with about three-inch corrugations for the entire length, and riveted at both ends to the shell of the boiler proper. They are not braced or stayed in any portion, the form, a perfect circle, not requiring it. They have, however, an enormous load to withstand which they are amply equal to under normal conditions. These are that perfectly clean water be fed to them wholly free from any trace of oil or grease. Where these find their way into the boiler, collapse is imminent sooner or later. Twenty years ago, more or less, an epidemic of collapsing furnaces prevailed in the merchant marine all over the seas, and for a long time the cause of it was not discovered. It was at first attributed to scale on the furnace crowns, but examination of injured furnaces did not reveal any scale; they were as clean as when first put in; but an English engineer, Mr. Vivian Lewis, who was consulted on the subject, found that it was oil coming over in the feed water that did the mischief.

This conclusion was at first combatted by the engineers in charge until it was proven absolutely by Mr. Lewis's analysis and experiments; he asserted that the free oil which contaminated the feed floated around on the surface and caught the scum, of which there is more or less in all boilers; this soon rendered it heavier than water, so that it sank to the bottom or was carried in various directions by the circulation, becoming attached to metallic surfaces, which it happened to strike, with the tenacity of a plaster. This oily mud was a perfect non-conductor of heat and effectually prevented access of water to the plates, so that it was only a question of a short time before they became red-hot and gave way under pressure, forming pockets or bags in the shells of stationary boilers, and deforming marine boiler furnaces. Mr. Lewis proved his contention by making a paste of the deposit in the bottoms of boilers and lining sheet metal pans with it, through which he speedily burned holes even when they were full of water.

The cause of the trouble having been found it was easy to prescribe the cure, which was not to admit oily feed water to steam boilers. This seems very simple as it reads, but it was not so easy to carry out in daily service. Engineers had become so accustomed to using quantities of oil in the cylinders to prevent scoring them that it had become second nature; but imperative orders and one or two collapses, which might easily have resulted seriously, convinced the rank and file that radical changes were necessary. Filters were introduced and more carefully attended to; they were not unknown before, but were so seldom cleaned that they were practically useless, and not until they were looked after by every watch did the disasters here discussed measurably cease. It is very rare now to hear of marine boiler furnaces coming down; when they do it is very certain that remissness occurs in the management. The course generally, or sometimes followed is to jack them back into place. A hot fire is made under the injury and the sheets forced back into place, suitable cast-iron blocks fitted to the corrugations being employed to avoid distorting them. This does not always answer, because it is difficult to bring the furnace to a true circle, in which case it is apt to be deflected again even when no oil is present.

Comment has been made by the daily press upon the alleged neglect to inspect the boilers of the "Bennington" by the Bureau of Steamboat Inspection, but naval vessels are exempt from examination by it, all govern-

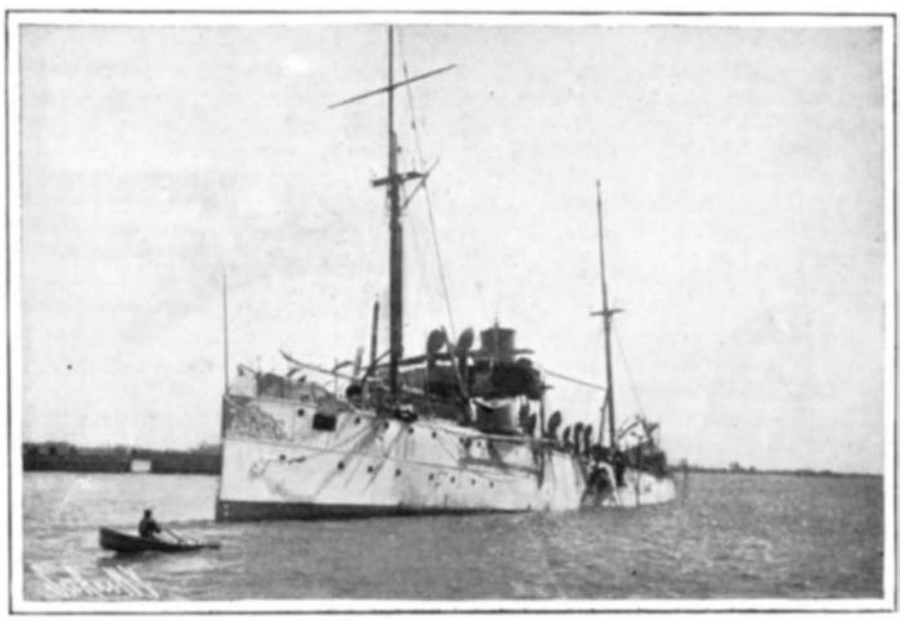

Displacement, 1,664 tons. **Speed,** 17.5 knots. **Complement,** 187 officers and men.

Gunboat "Bennington" After the Explosion.

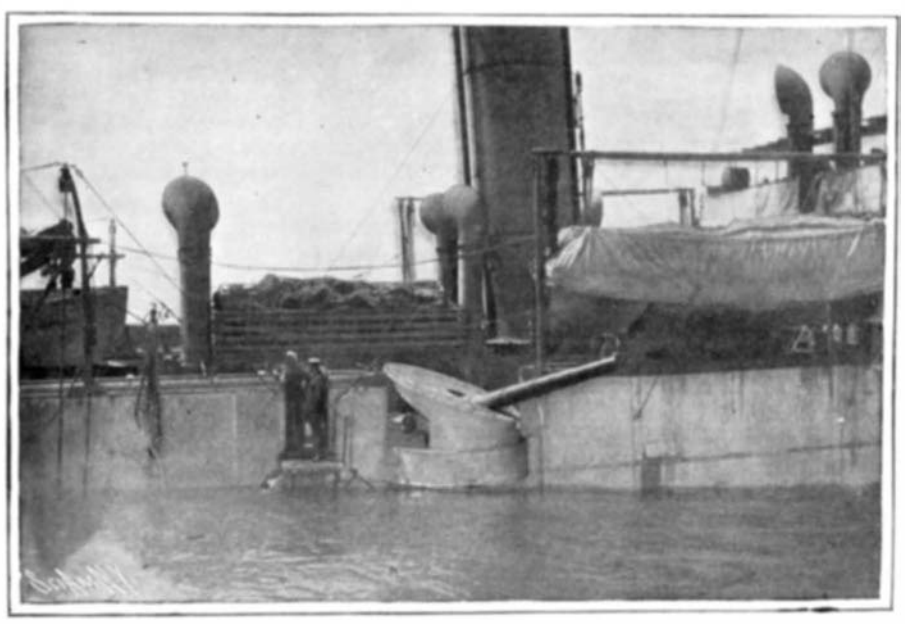

Starboard Side Amidships; the Vessel Sunk to the Bottom, After Explosion. Note 6-inch Midship Gun.

View on Starboard Deck Which Was Awash After the "Bennington" Rested on the Bottom.

Burial of the Victims in the Military Cemetery at Fort Rosencrans.

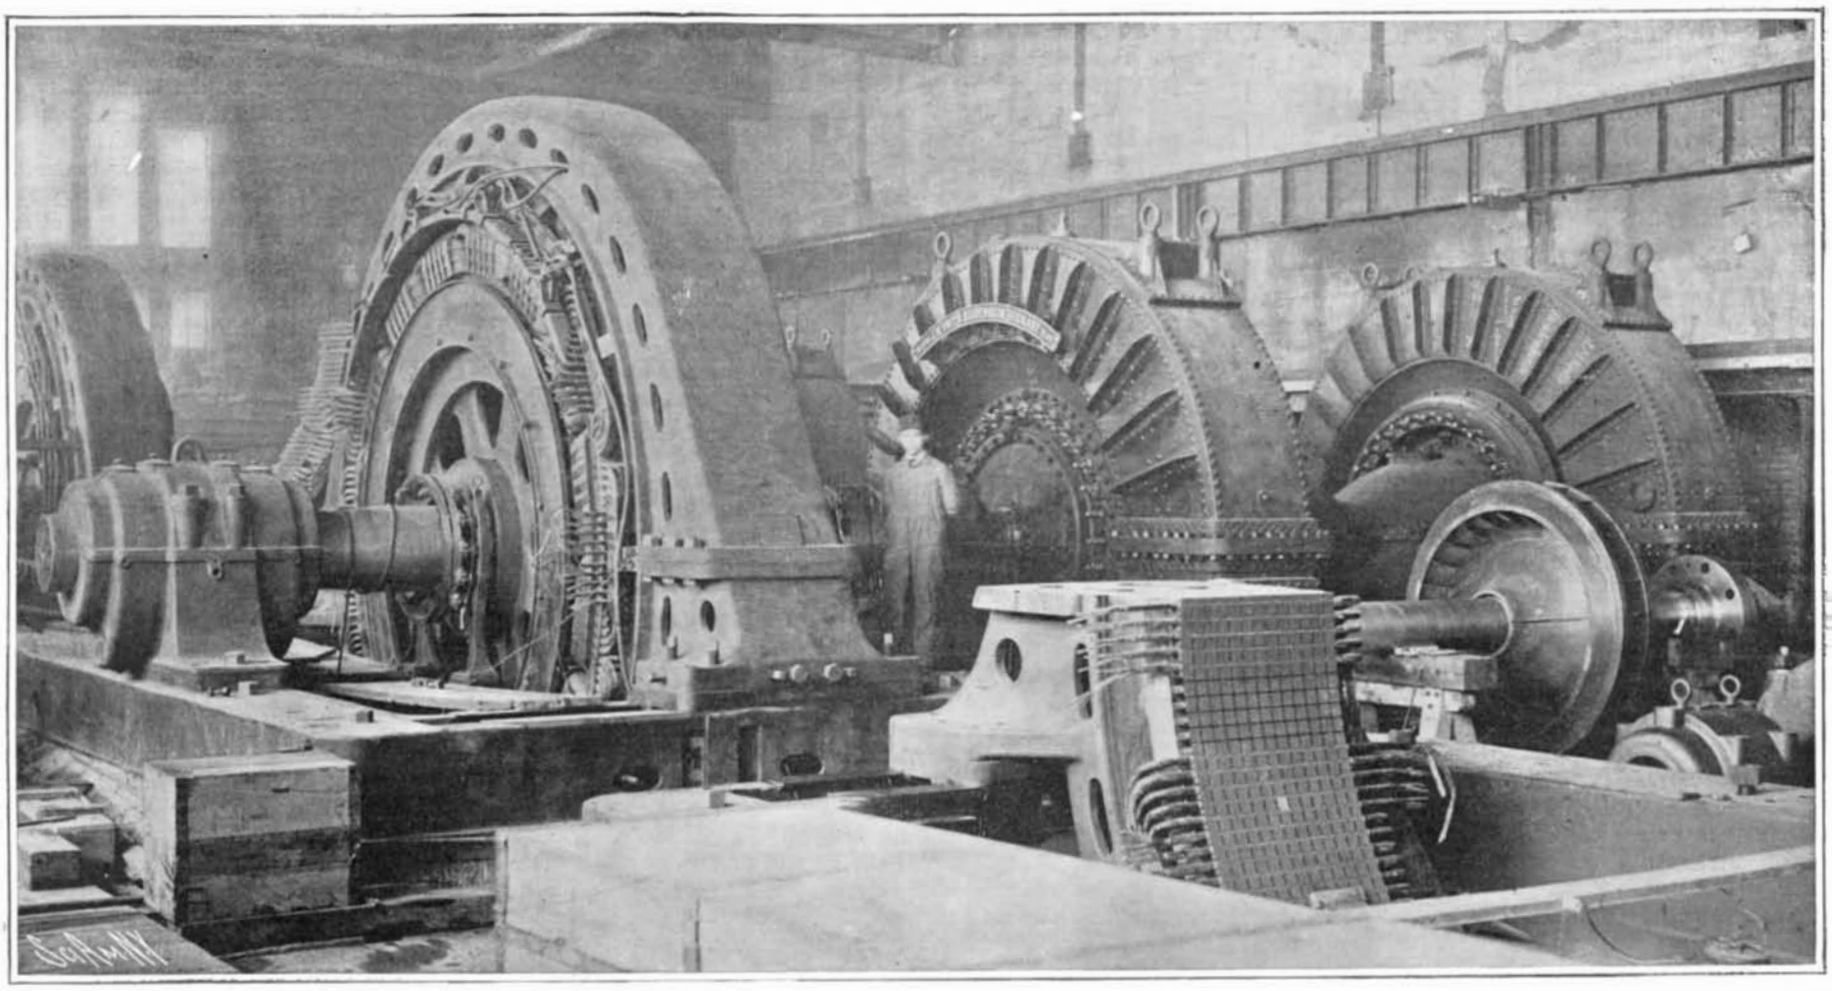

The station will be 1,000 feet long, and will contain 18 of these units, developing a total of 180,000 horse-power.

One of the 10,000-Horse-Power Units in the Generating Station.

Sand-Blasting One of the 18-foot Steel Conduits.

Interior of Wooden Form for Concrete Wing-Dam.

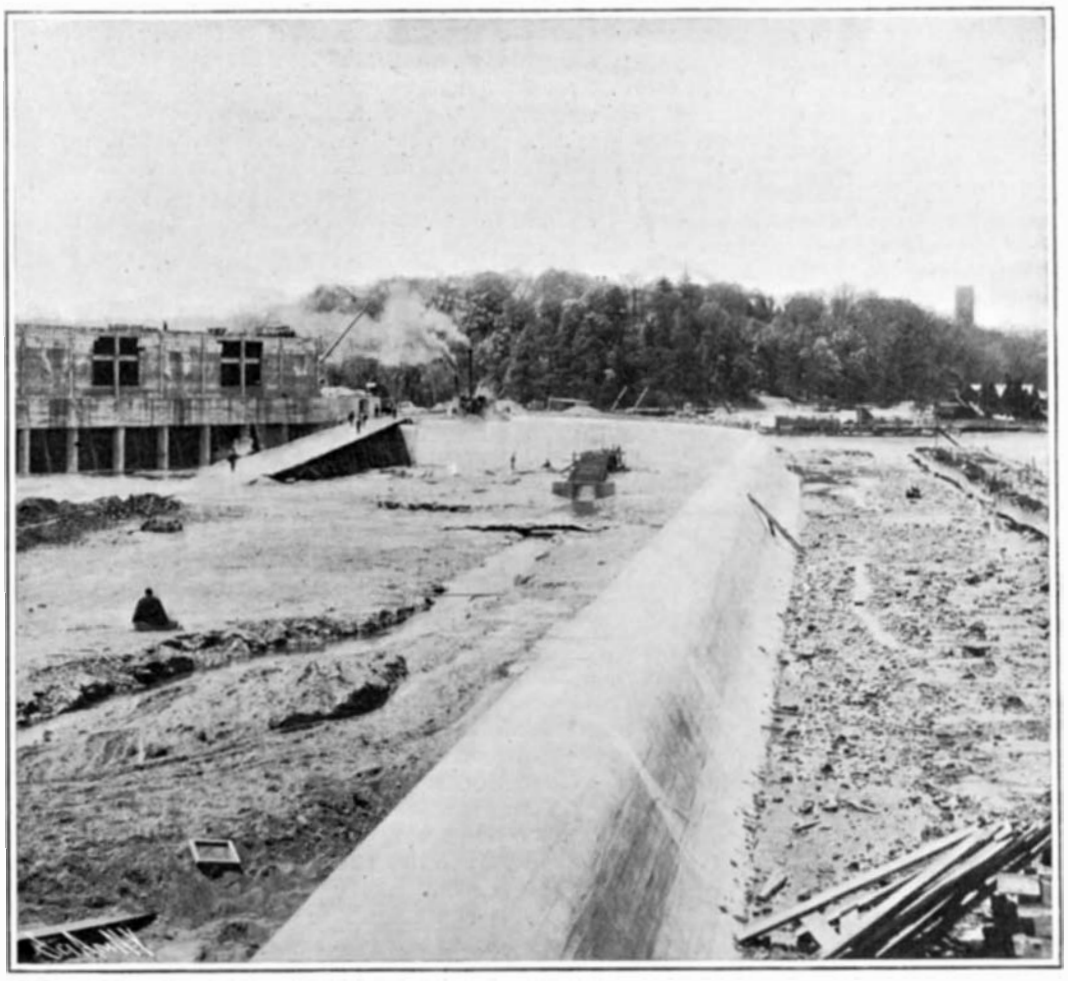

Concrete Wing-Dam for Gathering the River Water into the Forebay.

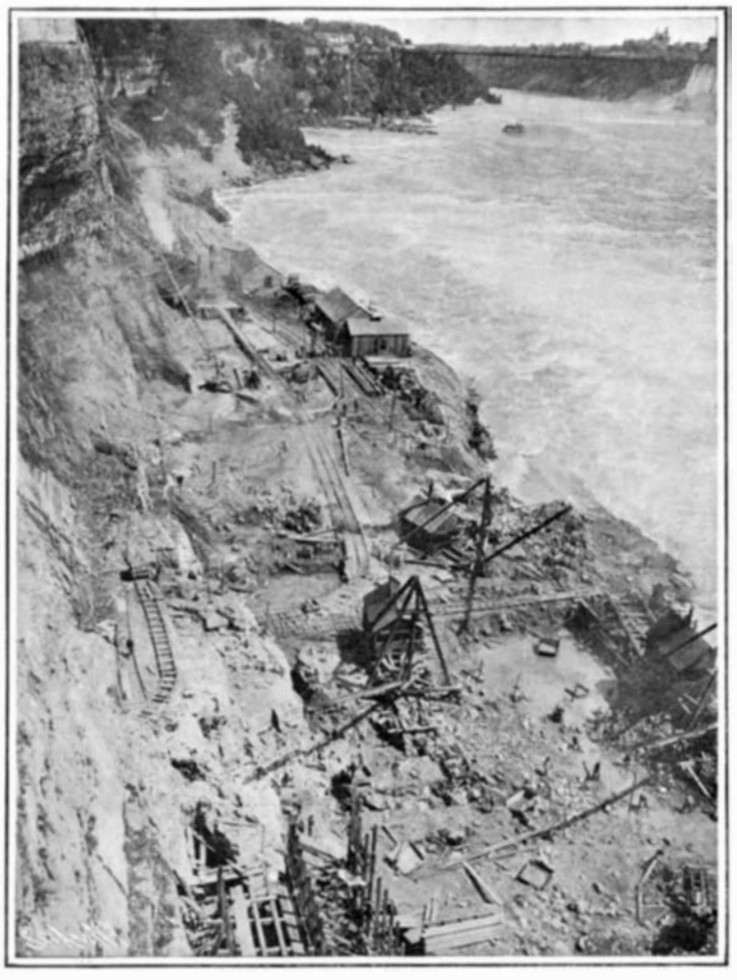

Excavating the Site for the Generating Station at the Foot of the Cliffs.

THE 180,000-HORSE-POWER PLANT OF THE ONTARIO DEVELOPMENT COMPANY AT NIAGARA FALLS.—[See page 126.]

ment vessels being inspected by the Navy Department only.

Corrugated furnaces were first introduced to the attention of engineers in 1853-4 by Richard Montgomery, a boiler-maker of the period, at the Morgan Iron Works, in New York city; his examples were, however, defective in that they were corrugated in the flat sheet, afterward bent to a circle and riveted; this left a joint and a flat spot, which was looked upon as dangerous under high pressures. Montgomery's conception of the furnace was all right, but, unfortunately, there was not at that time any way of welding seams, and it was not until the Continental Iron Works, at Green Point, devised a method of doing such work that corrugated furnaces came into general use many years afterward.

ELECTRIC POWER DEVELOPMENTS AT NIAGARA FALLS.—I.

Outside of the technical world it is but little understood how vast are the electrical power plants which are now under construction on the Canadian shore at Niagara Falls. When the Niagara Power Company announced, some dozen years ago or more, its intention of building on the American side of the river a power plant that would develop 50,000 horse-power, the world was incredulous; and not until the first turbine and generator were successfully at work was it willing to believe that the thing could be done. Yet today, not only has the original plant been doubled, but there are in course of construction, and partly completed, turbines and generators installed in three separate plants, that will have a combined capacity over eight times as great as that of the parent plant, while charter rights have been given for the development of power which will amount in the aggregate to over 900,000 horse-power. Named in the order of their size, these three installations are that of the Ontario Power Company, which will develop 180,000 horse-power; the Electrical Development Company, of 125,000 horse-power, and the Canadian Niagara Power Company, which will develop 110,000 horse-power, the latter duplicating the capacity of its original power plant.

The bird's-eye view of Niagara Falls and vicinity on our front page has been drawn with a view to show the location of the new power plants with reference to the Falls. The point of view is from a position over the Canadian shore, and slightly below the steel arch bridge which, a few years ago, took the place of the old highway suspension bridge. We are looking up the river, directly across the Horseshoe Falls, toward the broadly curving Canadian shore, and the rapids which extend for about 3,500 feet back from the crest of the falls. The rapids commence at a point opposite the upper end of Goat Island, and there is a fall of 50 feet in the next 3,500 feet to the edge of the Falls. It is at the head of Goat Island that the Niagara River begins its broad sweep through an angle of over 90 degrees, before discharging its waters over the Falls, and this broad curvature on the Canadian shore, coupled with the rapid rush of the waters, has been taken advantage of by the engineers in selecting the sites for power development. Two of the companies have boldly built out massive wing-dams into the torrent, starting them first at right angles to the shore line, and then curving them upstream at an acute angle with the shore. These wing-dams serve to draw the water in toward the intakes, through which it is led to the supply pipes or the penstocks, as the case may be, for ultimate use in the turbines. The other company has placed its power house at a point where the river was so full and deep that a wing-dam was not necessary, and the water flows directly through the sluice gates into the penstocks. The present article is devoted more particularly to a description of the works of the Ontario Power Company, and the other two installations will be treated at length in later issues.

Just here, however, with this bird's-eye view before us, we will briefly recapitulate the work that has been done at the present time in power development at Niagara. On the New York shore, about a mile above the American Falls, are the two power houses of the Niagara Falls Power Company—one on each side of its intake canal. The original plant is of 50,000 horse-power, and the second power house is of 55,000 horse-power. Each power house is located over its own wheel pit, and the water is conducted through penstocks to turbines in the bottom of the pits, and is led away through a tail-race tunnel over a mile in length, the discharge of which will be noticed in our bird's-eye view, just below the abutment of the steel arch bridge on the New York side. Fifteen hundred feet below the Niagara Power Company's intake canal is a canal which leads through the city of Niagara to a forebay on the edge of the cliff below the steel arch bridge. Here the water is led by penstocks down to the power house of the Niagara Falls Power and Manufacturing Company, which has an ultimate capacity of about 40,000 horse-power. Beginning at the head of the rapids on the Canadian side, we have first the intake of the Ontario Power Company, from which the water is led in underground pipes to the cliff above the generating station, where it is led down to the latter in penstocks and the power is developed on the edge of the river in a generating station that is a thousand feet in length. About 2,000 feet further down the rapids on the Canadian shore is the power station of the Electrical Development Company, where the water is deflected by a wing-dam through a series of screens and gates into penstocks which lead to turbines at the bottom of a huge wheel pit. The tail-race water is discharged by means of a tunnel which has been cut from the bottom of the wheel pit right through below the river to the edge of the falls, discharging at the river level below and back of the falls. About half a mile further down the rapids we see the power station of the Canadian Niagara Power Company, where the water is similarly led through penstocks to the bottom of a wheel pit, and discharged through a tail-race tunnel, whose outlet is just above the surface of the river below the falls and about half way between the falls and the generating station of the Ontario Power Company.

It will thus be seen that on both sides of the river the power plants have been built on two broadly different systems, one consisting in sinking a huge wheel pit to a level sufficiently higher than that of the river below the falls to allow of an easy delivery for the tail-race waters, and placing the turbines at the bottom of this pit, and the generators at the top of it at the level of the power house; the other method consists in carrying the waters from the upper level of the river by means of a canal or pipes and penstocks to a power station located on the shore of the lower river and at a sufficient height above the latter to give the proper clearance for the draft tubes.

ONTARIO POWER COMPANY DEVELOPMENT.

In the year 1887 the government of the Dominion of Canada made a grant to the Ontario Power Company for the development of hydraulic power at Niagara Falls, these concessions being made contemporaneously with the first concessions granted in the United States. Briefly stated, the works consist of a large system of intakes located abreast of the commencement of the upper rapids, and near what are known as the Dufferin Islands. These consist of an intake proper, an outer forebay, a system of screens, an inner forebay, and control gates. The intake, which is 618 feet long, extends diagonally from the shore out into the river, and consists of a series of concrete piers which carry a concrete curtain wall. This wall extends vertically downward 7 feet below the surface of the river, to within 6 feet of the river bed, and it projects 5 feet above the river level. The water passes through the intake in the 6 feet of space between the river bed and the under side of the curtain wall. As the river rushes along the curtain wall, its current is increased and the masses of ice that come down in the winter time are swept along the face of this wall, only a part of the water passing through and beneath it into the outer forebay, which contains an area of 8 acres. This forebay is bounded on the shore side by an artificial island; on the river side toward the falls, it is bounded by a massive wing-dam, of which we present an illustration. This dam extends out into the river at the lower end of the forebay with a broad curve and swings around upstream to meet the lower end of the intake curtain wall. Except during extremely low stages of water, the wing-dam will be constantly submerged, the water spilling over it into the river, as over a weir, and carrying with it such floating ice and debris as may pass through the outermost intake. The section of the wall 100 feet in length which is adjacent to the screen house, has its crest lower than the rest of the dam, thus forming a spillway of increased capacity at that point. Its effect is to create a strong surface current across the front of the screens, and sweep out into the river all ice that may have passed the ice curtain and escaped the general spill over the wing-dam.

From the inshore end of the wing-dam a series of massive screens have been built across the entrance to the inner forebay, which has an area of two acres. They are set on inclined guides in concrete masonry, and are removable by means of a crane. The gear for handling the screens, etc., is inclosed in an artistic stone building, on the roof of which is a broad promenade from which a magnificent view of the rapids may be obtained. After passing through the inner forebay, the water is conducted through three massive gates into three gigantic steel conduits, or water pipes. The gates are of the Stoney pattern. They are square in form, are counterbalanced, and run between roller-guides. As will have been judged from the foregoing description, the capacity of the head works is very large. Indeed, when the entire capacity of the plant is being generated, the flow of water will be 12,000 cubic feet per second. The depth of water increases gradually from 13 feet at the intake to 30 feet at the gate house. It should be explained that the designs of all the buildings throughout the works have been approved by the park commissioner, and they have been drawn to harmonize with the landscape gardening effects in the park.

Starting from the main gate house, the water will be conducted in three 18-foot steel conduits for a distance of about 6,200 feet to the top of the bluffs below the Canadian Falls. Of these three, the first has been completed. It is built of half-inch steel plates, and to secure additional stiffness 7-inch bulb-deck beams are riveted to the upper half of the pipe at every four feet, and the whole is incased in a thick layer of concrete. To insure that the conduits shall not interfere with the appearance of the park, they are being laid in trenches and will be entirely covered from view.

The first of these conduits is completed. From the under side of it six 9-foot penstocks are carried down in pairs through vertical shafts and out through horizontal tunnels in the solid rock of the cliff to the generating station. Each penstock supplies water for a 10,000-horse-power unit. The vertical depth from the center of the conduit to the center of the turbine is 133 feet. Two small penstocks of 30 inches diameter lead from the main conduit through an inclined tunnel to the power house, and supply water for the two exciter turbines.

It will be seen from the above description that this installation is entirely different from that of the Niagara Power Company on the New York side, in that it does not employ a wheel pit. The generating station is located on a bench at about the normal level of the river, which has been cleared of rock at a point about 700 feet down stream from the Canadian Falls. This building is 76 feet wide, 65 feet high, and when it is completed will be 1,000 feet in length. The main generators and their turbines are placed on the floor of the station 20 feet above mean water level. Each turbine unit consists of a pair of Francis turbines, mounted, side by side, on the same horizontal shaft that carries the generator, and operating at 187.5 revolutions per minute, at a rated horse-power of 11,400. After passing through the wheels, the water flows through concrete draft tubes, which terminate in tail-races built in the foundations of the station. These, in turn, discharge over a weir wall into the river. The crest of this weir wall is at elevation 349. Under full load conditions the water rises on it to elevation 353, giving a gross head between forebay where the water level is at elevation 553 and tail-water level of 200 feet. Of this head 175 feet is effective on the turbines. The first installation, which is now nearing completion, consists of six of the twenty main generators provided for by the general plan. Each generator is rated at 7,500 kilowatts, and delivers three-phase current of twenty-five cycles at 12,000 volts. The generators are of the rotating field type, the external diameter of the armature being about 21 feet. On a raised gallery which extends down the power house on the side opposite the river, are located the exciter turbines, the direct-connected exciting dynamos, and the turbine governors.

An entirely new feature in this power house is that the actual operation of the generating station is conducted from a separate distributing and control station, located at a distance from the generating station. This building is 550 feet inshore from the generating station, and stands on the bluff at an elevation of 250 feet above it. The control circuits pass from the generating station in insulated cables, carried through inclined tunnels in the cliff, which extend to a point on the hillside a little above the main conduits. Thence they are carried up the bluff, under ground to the distributing station. Here, in a separate switch room, the 12,000-volt automatic oil switches are mounted in brick cells. They are of the vertical plunger type and are magnetically actuated.

The transformers are arranged centrally throughout the length of the distributing station building, except at the center of the building, where space is given to the control room. Each transformer is rated at 2,500 kilowatts, or 3,350 horse-power, and they weigh 40 tons apiece. They are designed for a potential of 60,000 volts.

It is anticipated that as construction proceeds the foregoing plans will be modified to provide for 200,000 horse-power ultimate capacity, with 22 units of 10,000 horse-power each in the installation.

We are indebted for our information to P. N. Nunn and L. L. Nunn, the engineers of the company, who are responsible for the design and execution of this great work.

E. H. R. Green, of Dallas, Texas, one of the leading citizens of the State and president of one of the railroads of that section, and who enjoys the additional distinction of being the son of the famous Hetty Green, of New York, has gone in for automobiling as a pastime, with the result that he has designed an electric system for the timing of automobiles on the racetrack. It is said to be extremely simple in its construction and application, and can be laid down upon any course without any elaborate preparation. As the vehicle passes certain points along the course, a record is made of the time at the judges' stand at the starting point. The system involves the use of the wireless method.

AWARD OF THE GLIDDEN TROPHY FOR TOURING CARS.

Of the thirty-two machines that started from New York in the Glidden touring contest to the White Mountains and back on July 11, twenty-eight returned to the starting point on July 22. But two of the four machines that were missing at the finish dropped out because of breakdowns. One of these breakdowns resulted from an accident occurring the first day of the tour. The driver of a White steamer, Mrs. J. H. Cuneo, was obliged to run her machine off a 6-foot-high bridge in order to avoid a collision with another car, the result being that although the steamer (which fell on its side) was damaged somewhat, its plucky driver was able to run it and make a fairly good score until the last day of the tour, when the machine gave out completely with a broken water pump and driving shaft. The only other car which failed to finish on account of mechanical troubles was Mr. S. E. Hutchinson's 50-horse-power Panhard, which broke its crank shaft. One of the most remarkable accidents during the tour happened at North Conway, N. H. Mr. C. J. Edwards was driving his large four-cylinder Cadillac machine at a rapid rate of speed when, after rounding a curve, he came suddenly upon a covered bridge. The car slewed so that the hub of the front wheel struck an inclined beam at the entrance to the bridge, and, as it traveled up the beam, raised the car and turned it upside down. Although found under the machine, none of the occupants was seriously injured. The steering gear was damaged somewhat, but this was repaired and the day's journey completed.

As the tour was originated by Mr. Glidden for the purpose of bringing out the reliability and comfort of the modern touring car it was unfortunate that many of the entrants could not refrain from bursts of speed in an endeavor to reach the end of their daily destination first. The accident just cited was the result of speeding over a highway which was unfamiliar to the motorist, and that it did not have serious consequences can be laid only to luck.

Had the motorists all run with the precaution that was shown by Mr. Percy E. Pierce in driving his 28-32-horse-power touring car, there would not have been as many breakdowns on the road as there were and the competition for the trophy would doubtless have been much keener. As it was, however, the breakdowns were few in number and of slight consequence, and even the tire troubles were found to be much reduced over what have been usually experienced on runs of this character. Some of the troubles experienced by the various cars consisted of broken connecting rods, fouled spark plugs, broken-down spark coils, a broken rear spring (on the Packard truck), a chain jumping off the sprocket, and the giving out of a high-pressure hose. None of these repairs, with the exception of the broken connecting rods, necessitated very lengthy delays, and in almost every instance the car was soon going again.

The steepest hills were experienced at the Crawford Notch, N. H., and in the run from Springfield to Lenox, Mass., in the course of which the famous Morey Hill, which has an elevation of 146 feet and grades of nearly twenty-five per cent, was ascended. Despite the steepness of this hill and the poor character of the road, all the cars ascended it with practically no difficulty. Most of the larger cars were obliged to climb it on their low gear, while the lighter touring cars, fitted with two-speed planetary transmissions, were able to rush the hill the first part of the way and go considerably further than the others before dropping to their low gear. Had the test been carried out along scientific lines, this hill would have been a fine one on which to demonstrate the horse-power actually developed by the various machines. The fact that all climbed it with little or no difficulty, however, shows that the American machine of to-day has ample power for touring the most mountainous districts.

A very interesting feature of the Glidden tour, and one which should serve as a thorough demonstration of both the air-cooled and water-cooled type of commercial vehicle, was the performance of two trucks entered by the Knox Automobile Company and the Packard Motor Car Company. These vehicles were started every morning at an early hour, and they generally reached their destination late in the afternoon. They carried a considerable amount of baggage belonging to the tourists, and so reliable were they that after the first two days the contestants preferred to use them to the express companies. A picture of the Knox truck ascending Morey Hill is shown herewith, as well as a photograph of the Packard truck on top of Mt. Washington—a climb which is as noteworthy to-day for a commercial vehicle as was the ascent of Pike's Peak by a steam runabout some years ago.

The Knox truck is fitted with a standard double opposed cylinder 5 x 7 Knox horizontal air-cooled motor of 16 horse-power. It has a wheel base of 95 inches, a tread of 56 inches, and 32 x 3½-inch solid tires. Its maximum speed is 18 miles an hour, and its carrying capacity is 2,500 pounds. Besides the driver and his assistant, this wagon hauled daily from 1,200 to 1,500 pounds. The total distance it covered in the course of the tour (which distance included several side trips in the vicinity of Mt. Washington) was 1,001¼ miles, which was covered in 63 hours and 25 minutes, at an average speed of 14⅝ miles per hour; 107¼ gallons of gasoline and 4½ gallons of cylinder oil were used, and the only replacements were two chain links and one exhaust valve. With gasoline at 20 cents a gallon and oil at 50 cents this figures out the total expense at $27.58, or an average cost of 2¾ cents per mile. This is certainly a very favorable showing for a light-weight gasoline truck.

The Packard truck was fitted with a 15-horse-power twin-cylinder vertical engine having 4 1-16 x 5-inch cylinders. A three-speed sliding gear transmission and a double chain drive from countershaft to rear wheels are employed. During the course of the run this machine covered 865 miles on a total consumption of about 79 gallons of gasoline, which is equivalent to 10.95 miles per gallon; 5.5 quarts of cylinder oil were used, which equals 145 miles per quart. The load the first day was only about 2,000 pounds, but afterward the truck carried around 3,200. No great trouble was experienced in driving this heavy vehicle through the country, although it skidded some on mountain roads after a heavy rain. In climbing Mt. Washington chains were used on the rear wheels. These broke two separate times and the ends flew up and caught in the driving chain, thus breaking it. Within three miles of the summit the truck ran into a heavy sleet storm which put out the oil lamps and left the motorists only one acetylene headlight to see by. Despite climbing the mountain under such bad conditions the truck reached the summit in 4¼ hours. The start was made at 6 P. M. and the halfway house was reached about 7. After leaving that point it was overtaken by rain, which made traction very uncertain. A bad stretch of sandy road was then encountered and here the chains were put on. These served their purpose well until they broke with the result mentioned.

The Glidden trophy (which consists of a large globe supported on a suitable pedestal and surmounted by an automobile) was awarded to the Pierce touring car shown herewith. This car is a typical American touring car, having a bevel gear drive and a 4¼ x 4¾ four-cylinder motor. Including a 1,580-pound load, it weighed 4,280 pounds. It climbed Mt. Washington twice and completed the tour besides, without at any time experiencing any mechanical or tire trouble whatever.

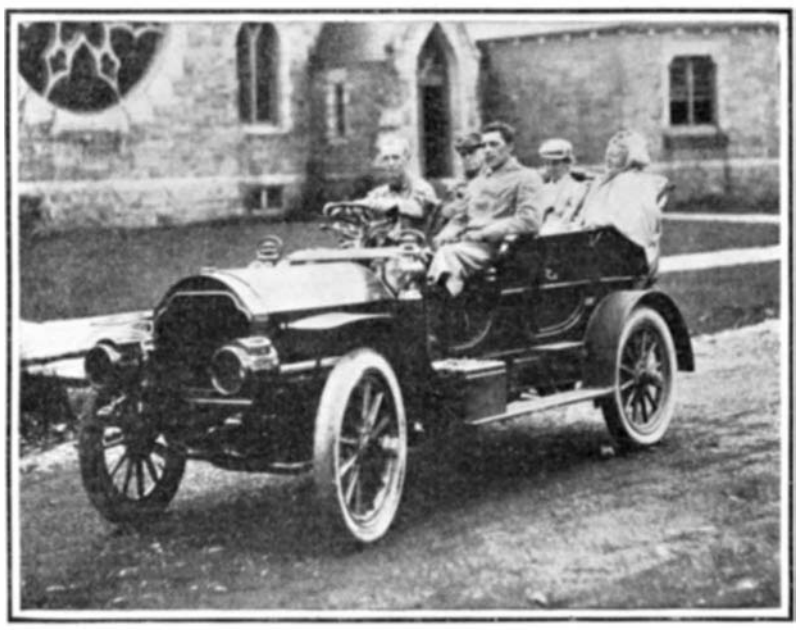

The Trophy Winner.—A Pierce "Arrow" Touring Car.

This car has a 104-inch wheel base. It is provided with a bevel-gear drive and 28-32-horse-power, four-cylinder motor.

Knox 16-Horse-Power Truck Climbing a Grade of 23 Per Cent on Morey Hill.

This truck has a carrying capacity of 1¼ tons. It is propelled by an air-cooled motor, and has a two-speed planetary transmission.

The 15-Horse-Power Packard Truck, Which Climbed Mount Washington in About 2 Hours Running Time.

This is a 1½-ton truck. Weight, 2,800 pounds. Motive power, two-cylinder vertical engine and three-speed sliding-gear transmission.

THE WINNING TOURING CAR AND THE MOTOR TRUCKS IN THE GLIDDEN TROPHY TOUR.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.**
MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 7133.—For the address of the importers of wire called "meteor" wire, used for the ignition points on igniters for explosive engines.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 7134.—Wanted, a machine for making and pressing yeast.

2d-hand machinery. Walsh's Sons & Co., Newark, N.J.

Inquiry No. 7135.—For makers and dealers in novelties and newly patented articles.

Perforated Metals, Harrington & King Perforating Co., Chicago.

Inquiry No. 7136.—Wanted, a 75-foot steel flag pole or staff.

Adding, multiplying and dividing machine, all in one. Felt & Tarrant Mfg. Co., Chicago.

Inquiry No. 7137.—For the manufacturers of the Tripoli Stone Filter.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 7138.—Wanted, machinery, etc., for converting waste wood into tar, turpentine and charcoal.

Marketers of meritorious inventions and specialties throughout the world. Tatem Mfg. Co., Buffalo, N. Y.

Inquiry No. 7139.—For the address of the Lawry Press Co., manufacturers of hay balers.

I sell patents. To buy them on anything, or having one to sell, write Chas. A. Scott, 719 Mutual Life Building, Buffalo, N. Y.

Inquiry No. 7140.—For parties to manufacture toy balloons capable of lifting two pounds.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Machine Company, Foot of East 138th Street, New York.

Inquiry No. 7141.—For makers of machines for felling trees, with the use of hot wires.

Gut strings for Lawn Tennis, Musical Instruments, and other purposes made by P. F. Turner, 46th Street and Packers Avenue, Chicago, Ill.

Inquiry No. 7142.—For the makers of stepdown transformers of 25 cycles, from 15,000 volts to 110 or 125 volts, with an output capacity of 100 amp. oil-cooled pole type.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, wood fiber machinery and tools. Quadriga Manufacturing Company, 18 South Canal Street, Chicago.

Inquiry No. 7143.—For makers of engines for changing farm wagons and top buggies into traction vehicles.

Absolute privacy for inventors and experimenting. A well-equipped private laboratory can be rented on moderate terms from the Electrical Testing Laboratories, 548 East 80th St., New York. Write to-day.

Inquiry No. 7144.—For firms in the United States manufacturing apparatus for the dry distillation of wood, for producing alcohol, charcoal and other products.

Manufacturers of all kinds sheet metal goods. Vending, gum and chocolate, matches, cigars and cigarettes, amusement machines, made of pressed steel. Send samples. N. Y. Die and Model Works, 508 Pearl St., N.Y.

Inquiry No. 7145.—Wanted, manufacturers of gold brilliant sign letters stamped from copper plate, concave, finished inside with gold leaf, used on inside of glass or show windows.

WANTED.—To buy ideas or patents for new articles to manufacture as a side line. Will consider all propositions, but prefer articles commonly used by the populace. Briefly give full particulars. F. Raniville Co., Grand Rapids, Mich.

Inquiry No. 7146.—Wanted, a meter for measuring gasoline gas.

WE WANT MACHINE SHOP WORK.—Also nickel and oxidized bronze plating. Have big shop and best facilities for pattern work, die-making and all kinds machine work. Large contracts wanted. Michigan Automobile Co., Ltd., Kalamazoo, Mich.

Inquiry No. 7147.—For manufacturers of a weight motor or blower to be used in connection with gasoline lighting system.

QUANTITY CLERK WANTED.—In the office of a large ornamental iron and bronze manufacturing company. A man understanding plans. Opportunity to develop from drafting office to quantity and estimating clerk. Address Clerk, P. O. Box 773, New York.

Inquiry No. 7148.—For makers of small, wooden boxes.

Young man, practical engineer, large acquaintance, desires to represent manufacturer on Pacific coast on commission basis; can furnish best of references as to industry, character and ability. Address W. Brown Smith, 620-622 Laughlin Building, Los Angeles, Cal.

Inquiry No. 7149.—For information in regard to the manufacture of paper bottles.

PATENTS ON DREDGES AND DREDGING MACHINERY FOR SALE.—By reason of the death of Ralph R. Osgood, valuable patents, having a long term to run, are offered for sale. For terms communicate with
The Albany Trust Company, Executor,
Albany, N. Y.

Inquiry No. 7150.—For makers of small, wooden articles turned out of wood.

A PAPER PROPOSAL.

Is the title of a clever little love story published by the LACKAWANNA RAILROAD solely on its merit as a bright piece of fiction. It is contained in a beautifully illustrated book of one hundred and twenty-eight pages which describes some of the attractive vacation places along the lines of that road.

The book may be had by sending ten cents in stamps to T. W. LEE, General Passenger Agent, New York City.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending August 1, 1905

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Acid, thiazol sulfonic, A. Thauss 795,869
Adding machine inking mechanism, C. Wales 795,024
Aluminium, making, A. G. Betts 795,886
Animal dipping machine, J. Manifold 796,232
Aqueous separation, means for effecting, J. D. Darling 795,823
Asbestos composition, Todd & Mayr 796,164
Auger, adjustable, A. C. Bohlin 796,182
Bailing press, C. M. Davidson 796,116
Barrel hoop, J. W. Brainard 796,290
Basket, E. Behne 795,884
Bat, base ball, A. Burrows 795,815
Bat, base ball, H. Brown 796,184
Batteries, automatic switch for storage, T. Duncan 796,063, 796,064
Beam end protector, P. Rieseck 796,248
Bearing, antifriction, T. Fox 796,200
Bearing mold, W. G. Hanna 795,830
Bed, metallic, F. B. Upton 795,947
Belt shifter, D. Abrey 795,804
Billiard cue, J. B. Ponk 796,351
Binder frame, loose leaf, F. Grimme 796,322
Binding machine for way bills, etc., C. F. McBee 796,346
Blast loading device, Cornelius & Cope 796,192
Blasting compound, F. G. Dokkenwadel 795,825
Bleaching apparatus, continuous, M. Muntadas y Rovira 796,345
Block mold, P. B. Miles 796,139
Block molding machine, E. W. Smith 796,021
Blower or fan, J. M. Seymour, Jr 795,938
Boat rapid launching apparatus, life, G. C. Schmidt 795,937
Boiler, E. B. Parkhurst 796,009
Boiler, C. G. Rowley 796,018
Boiler furnace, steam, Cleary & Kavanagh 795,894
Boiler header, steam, I. Harter, Jr 796,329
Boilers, duplex safety water column for steam, P. A. Rohan 796,249
Boilers, gas burner and regulating valve for, J. W. Wilson 796,274
Bolt lock, chain door, R. T. Atkin 795,882
Bone black kiln, B. Eba 796,303, 796,304
Bookcase, sectional, P. B. Pierce 795,931
Boot and shoe follower or form, B. J. Noyes 795,854
Boot and shoe holding appliance, G. A. Watson 795,871
Boring machine, J. Purcell 796,013
Bottle and stopper therefor, E. Bethel 795,885
Bottle cap, F. Recht ..... 796,354 to 796,356
Bottle case, F. W. Molitor 795,998
Bottle filler, C. B. Hall 795,911
Bottle, fraud detecting, S. E. Bell 796,285
Bottle, non-refillable, G. Klumpp 795,986
Bottles, combined brush and stopper for, W. H. Davidson 795,962
Bottles, jars, or other vessels, means for stopping or closing the mouths of, J. Jorgensen 796,221
Bottles or the like with liquids and applying stoppers or seals thereto, means for charging, R. G. Nash 795,848
Bottling device, beer or liquid, A. J. Signor 796,093
Box shuck making machine, J. P. Wright 795,949
Box shucks or slides, machine for making and sanding, Palmer & Denmead 795,927
Brace, B. W. Frampton 796,201
Bracelet, L. E. Sadler 796,152
Braiding machine, T. K. Ober 795,925
Brick machine, Congdon & Wuest 796,191
Bridge, A. O. Cunningham 795,899
Bucket, bottom dumping, G. L. Stuebner 796,264
Bucket, clam shell, J. McMyler 796,003
Buckle, J. A. Allen 795,879
Buckle, trace, W. J. Godfrey 796,320
Buggy top support, Modlin & Buhl 796,344
Building block manufacturing machine, J. W. Shone 795,939
Bung, L. Mueller 796,141
Bunsen burner, O. Wiederhold 796,097
Burial casket, J. P. Hill 796,332
Burner, J. N. Leach 796,079
Bushing, twyer, F. Klepetko 795,842
Butter mold, C. Corlett 795,896
Cabinet, compartment, C. V. Smith 795,865
Cabinet, file, H. S. Hopkins 795,979
Cables, apparatus for making armored, M. M. Waterman 796,378
Call apparatus, selective, J. A. Hulit 795,836
Camera, photographic, F. Blanpain 795,953
Can cover fastener, D. W. Roberts 796,015
Can making machine, J. Eldridge, reissue 12,375
Can opener, G. C. Parish 796,145
Caoutchouc from plants belonging to the nettle family, obtaining, G. H. Roeder. 795,860
Car, convertible stock or stable, I. J. Naughton 795,849, 795,850
Car, dumping, M. Boyle 796,288
Car heater, E. E. Gold 795,908
Car stake pocket, railway, Norfleet & Squire 795,853
Car ventilator, H. Kennell 796,224
Car wheel, P. J. Garrison 796,316
Car wheel, self oiling mine, Weisbrod & Rhodes 796,096
Carbonating and dispensing apparatus, liquid, J. F. & D. Youngblood 796,277
Carding machines, card clothing for fancy rollers of, E. Thielmann 795,946
Carpenter's tool, J. Le Roy 796,134
Carriages, sled runner for baby, W. L. Post 795,932
Cartridge, C. A. Bailey 796,391
Cash register, L. S. Scott 795,963
Cash register, W. H. Muzzy 796,240
Chafe iron, W. H. Loper 795,994
Cheese cutter, computing, L. Swank 796,161
Chuck lathe, G. F. Bean 796,177
Churn, aerating, J. M. O'Neall 796,083
Chute, etc., coal, Hunt & King 796,074
Cigar holder, J. L. McKay 796,002
Clock, alarm, J. E. Blithe 796,397
Clutch, Graham & Mitchell 796,205
Clutch, brake, or the like, friction, H. S. Hele-Shaw 795,974
Clutch controlling mechanism, Armitage & Thistlethwaite 795,808
Cock, try, J. W. Bailey 796,392
Collar, metallic horse, J. B. Howell 795,913
Coloring matter and producing the same, anthracene, O. Bally 796,393
Colter, plow, K. P. Klingberg 796,225
Column, J. Lally 796,227
Comb, F. W. Grell 795,829
Combustible mixtures, apparatus for producing, J. Clay 795,893
Conductor suspension device, G. F. Hagerman 795,910
Conduit, underground, H. T. Craven 795,821
Converter for bessemerizing matte, R. Baggaley 796,175
Converter lining, C. M. Allen 796,170
Converters, lining, C. M. Allen 796,169
Conveyer, pneumatic, A. W. Banister 795,809
Coop, folding, H. R. Franke 796,071
Copper converter, Baggaley & Allen 796,174
Copying writings, moistening cloth for, G. Stern 795,943
Corset, E. H. Garnier 796,072
Couch, F. T. O'Brien 795,926
Couch, combination, A. Brandt 795,811
Cream separator, centrifugal, S. C. Anker-Holth 795,807
Credit register, Ellett & Vick 796,199
Crushing rolls, R. Pick 796,224
Cuff fastener, C. W. Barnes 796,284
Cultivator, G. W. & C. E. Goss 795,968
Cultivator, O. H. Cloyd 796,401
Curbing, structural street, H. B. Oursler 796,006
Current induction motor, alternating, L. Schuler 795,861
Curtain and portiere elevator, lace, G. Rosenthal 796,359
Curtain fixture, J. A. Lyons 796,136, 796,137
Decoy, J. W. Reynolds 796,147
Dental matrix, T. Green 796,120
Dispensing device, C. P. Gliem 795,967
Ditching machine, H. W. Sargent 796,257
Door, F. W. Newman 796,142
Door check, T. C. Martin 795,995
Door fastening device, F. G. Willard 796,026
Door hanger, sliding, P. J. Levander 795,993
Door releasing apparatus, C. A. Criqui 795,897
Drainage and vent fitting, soil pipe, F. Walker 796,377
Dress suit case cover, S. Botteese 796,286
Drill hole enlarging device, T. M. Topp 796,165
Drilling machine, W. Wattie 796,095
Dyeing apparatus, J. A. Willard 796,381
Dyeing machine, J. A. Willard 796,383
Dyeing machine, duplex, J. A. Willard 796,382
Educational device, J. B. Olivera 795,855
Electric cable, C. E. Wilson 796,100
Electric circuit controller, F. Cedergren 795,958
Electric circuits, system for the selection of, A. G. Cox 795,820
Electric meter, T. Duncan, 796,033 to 796,048, 796,060, 796,066 to 796,069
Electric motor, asynchronous, P. Jigouzo 795,838
Electric switch, J. H. Rusoy 796,360
Electrical circuit selecting system, A. D. Neal 795,851
Electrolytic pots containing fused baths, stopper for, C. M. Hall 796,325
Electrostatic separation, G. W. Pickard 796,012
Electrostatic separation apparatus, G. W. Pickard 796,011
Electrotherapeutic apparatus, H. E. Currey. 796,114
Elevator brake, M. Fullenlove 795,965
Elevator engine, C. W. Hoffman 796,210
Elevator safety device, F. W. A. Wiesebrock 795,875
End gate fastener, W. K. Clarke 795,959
Engine coupling, traction, W. H. George 795,966
Engines, drill bit rotating mechanism for rock drilling, J. G. Leyner 796,081
Engines, electrical ignition apparatus for internal combustion, A. J. Postans 796,349
Exercise apparatus, physical, R. B. Smolik. 796,159
Exhibiting device, J. O. Hinckley 796,123
Expansion bolt, N. H. Steward 796,262
Explosives, making, J. C. Smith 795,940
Extension table, E. H. Humphrey 796,334
Eyeglass holder, G. A. Bader 796,281
Eyeglasses, C. F. Ingold 796,215
Faucet, mixing, Ross & Tollinger 796,252
Feed bag, C. J. Langmesser 796,229
Feed water heater and purifier, T. Ferguson 795,827
Feed water heater and purifier, H. E. Moffat 796,237
Feed water purifier, H. E. Moffat 796,236
Fence, electrically energized, A. D. McNair. 796,241
Fence post, J. W. Gannaway 796,313
Fence post, J. L. Beringer 796,397
Fence post device, I. M. Warner, reissue 12,376
Fence posts, adjustable wire fastener for cement, J. C. Bowe 795,810
Fence stay, wire, T. M. Conner 795,818
Fencing, machine for making staple, S. S. Withington 796,275
Filter, water, J. G. Sutton 796,266
Filtering cell, G. A. Duncan 796,198
Finger nail cutter, cleaner, and file, J. D. Wright 796,389
Fire screen, W. S. Hutchinson 795,914
Firearm, breech loading, Fay & Mossberg 796,307
Firearm safety stop, M. Bye 795,816
Fish culture tank, J. B. Duryea 796,118
Fish holder or bag net, E. W. Clark 796,294
Fishing rod or pole tip, Miller & Kunzinger. 796,342
Flier, Martin & Hovey 796,138
Floor mat, flat metal flexible, E. Packer 796,008
Flour holder, J. Rienstra 796,148
Fluid motor, elastic, P. B. Belches 796,395
Fruit and vegetable can, C. A. Julian 795,984
Fruit drier, domestic, H. A. Le Mar 795,992
Fruit packing machine, S. H. Shelley 796,156
Fruit shears, T. A. Ryles 796,150
Furnace, S. J. Riley 796,149
Furnace draft apparatus, boiler, G. Hughes. 795,834
Furniture connecting device, knockdown, Howell & Brown 796,333
Furniture, knockdown, J. E. Cartland 795,957
Fuse igniter, H. E. Brant 795,954
Fuses, device for securing metallic protecting caps to, K. Wieser 796,271
Game apparatus, C. A. Darius 795,822
Garment clasp, F. Wright 796,168
Gas burner, S. Kaufman 795,917
Gas, burning acetylene, Dolan & Tracy, 795,826, 796,302
Gas from peat, apparatus for the manufacture of combustible, C. Whitfield 795,874
Gas generator, E. H. Amet 796,279
Gas generator, hydrocarbon, W. I. Twombly 796,166
Gas generators, locking device for carbid holders and valves of acetylene, H. L. Pyle 796,086
Gas lighter, electric, J. Mlada 796,343
Gas producer, W. B. Hughes 795,835
Gas producer, H. Gerdes 795,907
Gas producer, E. Korting 795,918
Gate, S. A. Whitsett 796,379
Gearing, W. A. Hell, et al 795,975
Gearing for conveyances, W. M. Power 795,933
Glass mount for making shades, screens, etc., skeleton cast metal, R. F. Crooke. 796,193
Glazier's tool, J. Printz 796,246
Grafting machine, D. B. Speer 796,160
Grain binder motor attachment, Price & Stewart 796,085
Grain separator, S. Dunkelberger 796,117
Grain separator, L. T. Mann 796,233
Grave shield, A. C. Miller 796,235
Grinding machine, knife, H. Robinson 796,016
Guns, barrel locking device for breakdown, A. H. Fox 796,119
Guns, single trigger mechanism for breech loading double barrel, C. F. Lefever 795,991
Guns, swinging fore sight carrier for, J. Kurig 796,226
Halter, J. Wilhelm 796,025
Hame fastener, W. G. Youngs 796,028
Hame latch, J. M. Williams 796,273
Hammock swing, W. H. Frampton 795,904
Harrow cart, riding, F. M. Leusch 796,135
Harrow riding attachment, S. B. Hazard 796,330
Harvester, hand cotton, Price & Quentell 796,245
Harvester, pneumatic cotton, W. F. Harbour 796,207
Harvesting machine, self propelling combination, J. J. Troeger 796,268
Hat holder, J. E. Baker 796,104
Hat ventilator, J. C. Wilson 796,384, 796,385
Hay rack, E. A. Wheatley 795,873
Heating apparatus, steam, J. H. Knudsen 796,077
Heating water and circulating the heated water by means of steam, apparatus for, A. H. Barker 796,283
Heating water and other liquids, electrically, E. A. Byrnes 795,956
Heel concaving machine, wood, F. A. Day. 796,194
Hinge, G. W. Marsh 795,844
Hinge, J. R. Corbett 796,113
Hinge, separable spring, G. H. Schiek 796,153
Hollow bodies by means of matrix and die, manufacture of seamless metallic, F. A. Voelke 795,870
Hook and eye, E. J. Smith 796,158
Hook bending machine, H. Jones 795,916
Horseshoe, W. M. Dight 795,824
Hose coupling, J. Hogan 795,977
Hose coupling, I. W. Exley 796,306
Hose supporter, abdominal, I. B. Kleinert. 795,841
Hot water apparatus, W. Voelpel, et al 795,948
Hydrant, non-freezing, C. Ellis 795,964
Hydrocarbon burner, J. O. Alwood 795,951
Indicating instrument, T. Duncan 796,061
Inhaler, J. R. Spanogle 795,866
Inkstand, W. Williams 796,098
Internal combustion heat engine, J. L. Bogert 796,106
Iron sand, iron oxide, and other suitable substances, apparatus for the reduction of, D. R. S. Galbraith 796,312
Journal bearing, J. S. Kemp 796,076
Journal box, J. C. Fritts 795,828
Ladder, H. E. Skeels 796,157
Ladder, A. Hartzler 796,208
Lambrequin or like hangings, pole for, M. M. Harding 795,972
Lamp, electric hand, H. F. Stakelbeck 795,867
Lamp, inverted incandescent gas, F. M. Brooks 795,890
Lamp or gas burner, inverted incandescent, A. Rector 796,014
Lamp protector, W. H. Greenwood 796,404
Lathe, F. O. Waite 796,023
Lathe, R. L. Ambrose 796,171
Leather working machine, H. W. Le Favor. 795,990
Lemon squeezer, E. D. Middlekauff 796,341
Lifting jack, double acting reversible, W. Buckethal 795,812
Lifting jack, screw, E. H. Goodwin 796,204
Line grip holder, A. Nord 796,143
Lines, ropes, cables, and the like, hitch block for, A. H. Jones 796,218
Linotype machine, H. C. Zenke 795,878
Linotype machine, J. R. Rogers 795,936
Linotype machine, C. L. Grohmann 795,969
Linotype machine liner, F. P. Howard 796,213
Liquid separator, centrifugal, Collins & Hartmann 796,189, 796,190
Liquids or for compressing gases, hydraulic apparatus for raising or forcing, H. D. Pearsall 795,929
Locomotive adjustable exhaust, Lewis & Smith 796,080
Locomotive, compound, J. B. Allfree 795,880
Locomotive engine, W. M. Jewell 795,915
Loom attachment, J. M. Van Werry 796,373
Loom filling tension device, J. Northrop 796,004
Loom harness heddle separating device, C. D. Lanning 795,989
Loom threading machine, carpet, H. Heyman 796,209
Loom warp stop motion, H. Wyman 796,101
Looms, pattern matching mechanism for tapestry, H. Wyman 796,102
Lubricating device, O. Crosby 795,898

Wood-working Machinery



For ripping, cross-cutting, mitering, grooving, boring, scroll-sawing edge moulding, mortising; for working wood in any manner. Send for catalogue A.
The Seneca Falls M'f'g Co.,
695 Water St., Seneca Falls, N. Y.

ENGINE & FOOT LATHES. MACHINE SHOP OUTFITS. TOOLS AND SUPPLIES. CATALOGUE FREE. SEBASTIAN LATHE CO. 120 CULVERT ST. CINCINNATI, O.

Foot and Power and Turret Lathes, Planers, Shapers, and Drill Presses.
SHEPARD LATHE CO., 133 W. 2d St. Cincinnati, O.

Lowest Round Trip Rates to Pacific Coast Points via The Nickel Plate Road.

$69.50 Buffalo to Portland, Seattle or Tacoma and return, daily until September 29. Tickets may be routed through California at slightly higher rate.
$75.50 Buffalo to San Francisco or Los Angeles and return. Daily August 6th to 14th inclusive.
For particulars, write A. W. ECCLESTONE, D. P. A. 385 Broadway, New York City.

THE OBER LATHES

For Turning Axe, Adze, Pick, Sledge, Hatchet, Hammer, Auger, File, Knife and Chisel Handles. Whiffletrees, Yokes, Spokes, Porch Spindles, Stair Balusters Table and Chair Legs and other irregular work.
☞ *Send for Circular A.*
The Ober Mfg. Co., 10 Bell St., Chagrin Falls, O., U.S.A.

A. W. Faber.
Manufactory Established 1761.
Lead-Colored Slate Pencils, Rubber Bands, Erasers, Inks, Penholders, Rulers, Water Colors, Improved Calculating Rules.
Send for descriptive Circular S.
44-60 East 23d Street, New York, N. Y.
Grand Prize, Highest Award, St. Louis, 1904.



THE CURTIS DOUBLE CYLINDER MOTOR
5 h.-p. 60 lbs. Roller Bearings.
Capt. Baldwin's famous airship, the California Arrow, is propelled by this motor. Also our motorcycle, which holds the world's record of 10 miles in 8 min. 54 2-5 sec.
Catalog Free.
H. H. CURTIS MFG. CO.
Hammondsport, N. Y.

THEY NEVER GET HOT

That is the beauty of the **Prouty Wire Valve Wheels.** Cores of wheels up to and including 1¼ in. size are of brass and larger sizes of malleable iron.

PRICES

Size Valve, inches	¼	⅜	½	¾	1	1¼	1½
Out. dia. of wheel, in.	2	2⅜	2⅝	3	3½	3½	
Price, each	$0.12	.12	.12	.14	.16	.20	.25

Size Valve, inches	2	2½	3	3½	4	4½	
Out. dia. of wheel, in.	4	4½	5¼	5⅞	6¾	7½	
Price, each	$0.30	.35	.40	.45	.55	.65	

SEND FOR CATALOGUE.
Sawyer Tool Mfg. Co., Fitchburg, Mass.



Hydro-Carbon Motors
Headless Self-Contained
It is as easily controlled as a steam engine. Variable sparker. The only perfect moderate priced launch engine on the market. Let us convince you. Write to-day.
Grant-Ferris Co., Troy, N. Y.

FRICTION DISK DRILL
FOR LIGHT WORK.
Has These Great Advantages:
The speed can be instantly changed from 0 to 1600 without stopping or shifting belts. Power applied can be graduated to drive, with equal safety, the smallest or largest drills within its range—a wonderful economy in time and great saving in drill breakage. ☞ Send for Drill Catalogue.

W. F. & JNO. BARNES CO.,
Established 1872.
1999 Ruby Street, - - Rockford, Ill.

Will Pay for Itself
IN TWO DAYS.
Spins Sugar into Cotton Floss Candy.
N. Y. FLOSS CANDY MACHINE CO.,
19 Park Place, N. Y.

THE EUREKA CLIP
The most useful article ever invented for the purpose. Indispensable to Lawyers, Editors, Students, Bankers, Insurance Companies and business men generally. Book marker and paper clip. Does not mutilate the paper. Can be used repeatedly. In boxes of 100 for 25c. To be had of all booksellers, stationers and notion dealers, or by mail on receipt of price. Sample card, by mail, free. Manufactured by **Consolidated Safety Pin Co.,** Box 121, **Bloomfield, N. J.**



ARTESIAN
Wells, Oil and Gas Wells drilled by contract to any depth from 50 to 3000 feet. We also manufacture and furnish everything required to drill and complete same. Portable Horse Power and Mounted Steam Drilling Machines for 100 to 1200 feet. Write us stating exactly what is required and send for illustrated catalogue. Address
PIERCE WELL ENGINEERING AND SUPPLY CO.
136 LIBERTY STREET, NEW YORK, U. S. A.

Lightning Universal Adjustable Wrenches



Most complete and satisfactory wrench made. Instantly adjustable to any size nut by slides and lever. Always holds fast. Just the thing for automobiles, wagons, carriages and mechanics generally. Circular Free.
Hackett Mfg. Co., 417 Franklin Avenue, St. Louis, Mo.

"These two I use daily."

ARNICA Tooth Soap

Is antiseptic; preserves while it beautifies. No spilling or wasting; convenient and economical.

25 Cents
At all Druggists

STRONG'S Arnica Jelly (Carbolated)

Keeps the skin free from roughness and pimples. Nothing better for sunburn or chapping; also for cuts, bruises, burns and all eruptions. Keeps the skin soft, smooth and delicate. The collapsable metal tube is convenient and unbreakable.

Take it with you wherever you go. If your druggist hasn't it—Send to us.

Sent postpaid on receipt of 25 cents.

C. H. STRONG & CO.
CHICAGO



DO YOU USE GRINDSTONES?

If so we can supply you. All sizes **mounted** and **unmounted**, always kept in stock. Remember, we make a specialty of selecting stones for all special purposes. *Send for catalogue "I"*

The CLEVELAND STONE CO.
2d Floor, Wilshire, Cleveland, O.

The Revelations of Nature

A Most Extraordinary Book Just Issued

Order to-day or keep this ad. for reference; you will need it

It is divided in three parts, headed as follows:

Part I Discoveries unparalleled since the time of Newton. Perpetual Motion is solvable and solved. (This is meant that inexhaustible energy can be secured free of cost, and not that work can be done without expenditure of energy.)

Part II—Forces of Matter. Celestial Mechanism.

Part III—Life and Spirit. The Infinite. Immortality.

The following synopsis extracted from the end of the book itself will give a partial insight of its purports:

"A recapitulation of the principal great principles enunciated herein and considered as proven or very near, may then be summarized as follows:

1.—Forces have positive and negative poles; heat and cold are the opposite poles of one single force; so are electricity and magnetism.

2.—Both forces are derived from the chemism of matter; so is everything else than matter itself and embraces all life and motion in the universe.

3.—The motion of the universe is permanently maintained by the combined play of the positive and negative poles of the natural forces through mutual polar transformations and the energy derived therefrom, which is thus inexhaustible.

4.—Excepting the Infinite and matter, everything else in Nature is represented by motion of matter and is consequently immaterial or spiritual in essence.

5. Accomplished motion remains an imperishable entity in itself, and is the base of the spirit of man or the man himself, who is therefore immortal."

The book is not made up merely of a collection of fancies from a fertile imagination as are many scientific theories and doctrines, ancient and modern. Although the author is unknown to the world, he has been working in silence for many years, and his deductions have been arrived at step by step as a result of observation, deep thinking and analytical reasoning; but a first great discovery made in connection with an invention was the original spark that gave birth successively to all the others. Some of his discoveries are supported by overwhelming evidence adduced in the work, the weight of which will be readily perceived by unbiased minds. He conclusively shows that many doctrines now held as some of the foundations of modern science are untenable, including the doctrine of the conservation of energy and Newton's great law of gravitation, which, though true in part, has remained incomplete for two centuries.

Without saying further now, the author will let the world give its own criticism. The book is written in popular style, and there is no mathematics about it, so that any person of modest education can understand all. No thinker, student or any intelligent person who want to be abreast of the progress of human thought and discovery in the higher spheres of research can afford to be without this book. Address all orders to the author and publisher, L. Guillemet, 22 Clay Street, San Francisco, Cal. Price, postpaid, $2; cloth binding; 258 pages. Booksellers and agents supplied. Terms on application.

Lubricator, H. P. Josewski	796,125
Mantle trimming apparatus, W. W. Adam.	795,805
Manure loader, E. Ring	795,859
Marking pot and stencil brush inker, combined, J. B. Laughton	796,129
Mat. See Floor mat.	
Match box filling machines, feed regulator for, A. Lagerman	795,919
Match machine, J. P. Wright	795,950
Match splint assembling machine, W. E. Williams	795,877
Matte, converting, R. Baggaley	796,282
Measuring instrument, electrical, T. Duncan, 796,031, 796,032, 796,049 to	796,056
Mechanical movement, W. W. Heffron	795,973
Metal drill, O. Granberg	796,321
Metal machine, expanded, L. C. Steele	796,367
Metal, machines for manufacturing expanded, O. Bradford	796,183
Metals, pulverizing, H. Maxim	796,338
Meter, T. Duncan, 796,057 to 796,059, 796,062,	796,065
Milk evaporating apparatus, W. A. McCool	795,847
Molding machine vibrator, F. W. Hall	795,970
Motor, H. E. B. Blomgren	796,180
Motor meter, C. P. Steinmetz	796,368
Motors, balancing high speed, P. E. Dowson	795,901
Mower grass catching attachment, lawn, C. K. Haun	796,326
Musical instrument tuning device, J. H. Brady	796,289
Musical instruments, tracker and connection for automatic, Whitehead & Hintz	796,270
Musical or other instruments employing perforated sheets, O. H. Arno	795,881
Nail puller, M. H. Willhide	795,876
Nest, hen's, J. H. Blank	796,105
Numbering machine, L. K. Scotford	796,155
Nursery chair, H. P. Rasmussen	796,353
Nursery seat, child's, M. Wolff	796,276
Nut lock, P. Liberty	796,337
Oar, bow facing, Simpson & McPeek	796,260
Oil conductor, J. C. Jones	796,219
Oil wheel, circulating, G. T. Wright	796,387
Oil wheel and bearing, circulating, G. T. Wright	796,388
Ore concentrator, I. A. Cammett	796,110
Ore dressing machine, Anderson & Bennie, 796,172,	796,390
Ore feeder, M. Nelson	795,923
Packing, metallic, A. Beldam	796,179
Packing, piston, Reading & Houghton	795,935
Packing, piston, W. B. Norton	796,144
Pail attachment, milk, C. D. Higgins	796,122
Paper or other substances, device for stretching, R. Gauguet	796,202
Paving, means for removing asphalt, J. Gammie	795,905
Peat for the production of fuel and the recovery of the by-products, treating, C. A. Sahlstrom	796,019
Pencil sharpener and point protector, A. Levingston	795,920
Photophone, R. W. Hartmann	796,254
Physician's operating table, B. B. Foster	795,903
Piano, automatic, M. Clark	795,817
Piano back, upright, F. Denninger	796,300
Pianos, key-locking device for pneumatic, J. Carruthers	796,112
Picture frames, foldable blank for forming, H. A. Fisher	796,310
Pig trough, P. J. Devine	796,301
Pin setting, stick, L. E. Sadler	796,151
Pipe coupling, A. T. Herrick	795,976
Pipe coupling, J. S. Laitinen	796,078
Pipe coupling lock, Angeloni & Catalani	795,952
Pipe coupling, threadless, J. P. Jones	796,220
Pipe hanger, R. W. Beaton	796,178
Pitman rod connection, J. B. Lavene	796,130
Plane, J. H. McGhan	796,001
Plant support, W. Hughes	796,214
Plants, machine for thinning rows of, F. H. Kerr	795,985
Plastic article mold, W. A. Dickey	796,195
Plow, J. T. Tarver	796,267
Plow stock, P. Fehrentz	796,308
Plow wheel, W. H. Conroy	795,895
Plows, four horse evener for wheel, O. P. Wolcott	796,386
Plug switch, J. I. Ayer	796,029
Pneumatic despatch tube apparatus, J. F. Skirrow	796,094
Pneumatic despatch tube apparatus carrier, C. F. Stoddard	796,263
Post. See Fence post.	
Potato separator, sprouter, and cleaner, C. V. Rose	796,017
Power brake, L. Pfingst	796,146
Power transmission, resilient connection for, E. A. Muller	795,845
Preserving jar, R. J. Rose	796,250
Printing lithographic and similar transfers, press for, T. M. North	795,924
Printing press, J. J. Rafter	795,858
Printing press inking arrangement, G. P. Fenner	796,309
Printing roller, F. Horsell	796,212
Pulley frame, fork, H. L. Ferris	795,902
Pump, centrifugal or similar, F. Ray	795,934
Purifying apparatus, H. Reisert	796,088
Rail joint, C. J. Samuelson	796,255
Railway crossing, P. J. Sandhofer	796,090
Railway rail joint, W. Smith	795,941
Railway signal, automatic, J. P. Phillips	796,242
Railway spike, R. O. Day	796,299
Railway switch safety device, C. F. McDonald	796,000
Railway tie, W. A. Moore	796,140
Railway tie, A. M. Freeman	796,311
Railway track structure, Stockwell & Luther	795,945
Railway trains, mail and package delivering and receiving device for, F. X. Lefebvre	796,133
Razor, S. W. Marvin	795,996
Recording lock, A. De Vilbiss, Jr., reissue.	12,374
Relay, electrical, A. D. Neal	795,852
Retort, J. E. Aslin	796,103
Reversing mechanism, J. Shoecraft	795,864
Road roller, kneader, and packer, oiled, A. E. Burns	796,186
Rock drill, E. R. Langford	796,228
Rock drill attachment, M. Hardsocg	796,327
Rolling mill guide attachment, A. M. Johnston	796,335
Rotary engine, L. V. D. Sutton	796,370
Ruling machines, pen clamping device for paper, H. N. Grissinger	796,323
Sand distributing machine, G. Gioiosa, 796,203,	796,319
Sash lock, W. C. Applegate	796,280
Scales, concrete foundation for wagon and track, G. H. Birchard	796,398
Screen plate washer, automatic, Babbitt & Steele	795,883
Screw driver, R. Schulze	796,154
Screw driver, J. D. Campbell	796,187
Seal, E. J. Brooks, 796,107,	796,108
Seal, snap, E. J. Brooks	796,109
Sealing device, vessel, T. E. Harley	795,831
Seat covering support, R. W. Bock	796,181
Seesaw, E. D. Smith	796,364
Self waiting stand, Hyde & Buchanan	795,837
Semaphore locking device, A. B. Apperson	796,173
Sewer and drain cleaning apparatus, W. F. Hanaford	795,971
Shade fixture, R. Morris	796,238
Shaft coupling, I. Lehman	796,230
Sheet metal expanding machine, L. E. Curtis	796,402
Shock lifter and carrier, J. K. Green	795,909
Shoe fastening, R. S. Scott	796,258
Shuttle brake, J. Laforet, 796,127,	796,128
Signal. See Railway signal.	
Signaling, method and means of, F. W. Prentice	795,857
Signaling system and brake applying mechanism, combined, H. C. Reichardt	796,247
Silver, electrolitically refining, A. G. Betts.	795,887
Skirt supporter, C. P. Keeler	796,126
Sled draft mechanism, traction, N. E. Brown	795,955
Smoking implement, F. W. Lucas	795,921
Snap hook, E. R. Beach	796,396
Snatch block, W. Smith, 796,365,	796,366
Soldering apparatus, can cap, J. T. Wilmore	796,099
Sparker, A. R. Joy	795,983
Speed transmission mechanism, variable, H. K. Cowen	795,819
Spinning and winding mechanism, C. W. Hubbard	795,981
Spinning machine, J. J. Buckley, et al	795,814
Spinning mechanism, J. J. Buckley, et al	795,813

Did you read the article on *Hollow Concrete Building Blocks* in the August 5th issue of the SCIENTIFIC AMERICAN? If you did, you will notice that they selected what they considered the best concrete block machine on the market to be illustrated. This particular machine was the **Hayden Automatic Block Machine,** a cut of which you will note in this advertisement. The SCIENTIFIC AMERICAN has many reasons for considering the **Hayden Automatic** the very best, and we can give you these reasons in an interesting booklet upon application.

The Hayden Automatic Block Machine is protected by very broad patents, and any one purchasing a Hayden Machine will be absolutely protected by us.

Blocks made on the **Hayden Automatic** are made face down in a horizontal position, thereby enabling the operator to reproduce a perfectly faced block, also a block absolutely moisture proof by using a richer mixture of finer sand and cement for the face with no additional waste of time.

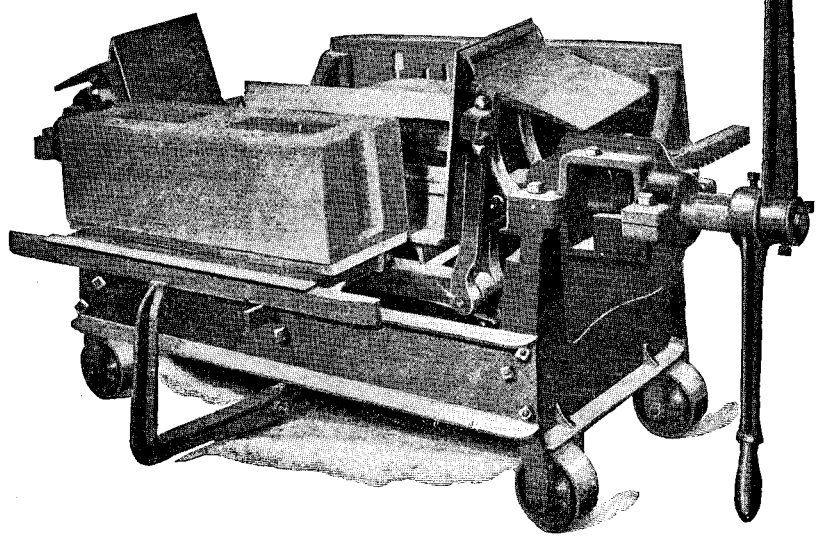

The above cut shows the final position of the HAYDEN AUTOMATIC MACHINE after mould box has been turned over by one movement of lever. Moulds simultaneously and automatically released from block and block delivered away from moulds in a position to be easily carried away for curing.

All inquiries and information regarding the **Hayden Automatic** will be gladly given upon request, and we are always pleased to demonstrate and invite the inspection of any one interested in a thoroughly up-to-date and **Automatic Concrete Block Machine.**

HAYDEN AUTOMATIC & EQUIPMENT COMPANY
26 Cortlandt Street, New York, U. S. A.

MY BOOK IS FREE



At my suggestion, the Board of Directors have decided to continue their great Free Offer for 30 days longer, and will send out my book,

Mysteries of Magic,

absolutely free of charge. If you want a copy, you would better write to-day.

Do you realize that you can master the fascinating art of the magician and can do sleight-of-hand tricks just as well as I can, and I have been doing them successfully for the public for 30 years? I can teach you to do them through my perfected mail course. But my book explains all this carefully. It is finely illustrated, and gives you some of the secrets of the professional magician; it also gives you the names and original letters from persons high in society who commend my work. Write for this book to-day.

THE ANSBACH CO. Dept. 10
Salo Ansbach, Pres't
HILLSDALE, N. J.

(The Ansbach Co. is incorporated under the Laws of the State of New Jersey, with a capital of $50,000, which is a guarantee of its responsibility and an institution well able, both financially and otherwise, to carry out all its promises and pretensions.)



Portable Buildings

have a peculiar value because there is no real estate attached to them. They can be sold and transferred elsewhere with the greatest of ease. We manufacture all kinds of portable buildings, such as **Automobile Houses,** Camping Houses, Complete Cottages, Temporary Offices, etc., with furniture and equipment for all; Poultry Houses, fitted up with nests, roosts, etc.; Workshops, with all necessary tools and implements.

THE LATHROP MFG. CO., Rochester, N. Y.. U. S. A.

WELL DRILLING Machines

Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on sills. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.

WILLIAMS BROS., Ithaca, N. Y.



JAGER Marine 4-Cycle Engines

Skillfully designed and well built. Single lever control, combining automatic carburettor with spark advance. Develops wide speed range and reliability under most trying conditions. Sizes 3 to 60 h. p. Send for catalog.

CHAS. J. JAGER CO.
Cor. High and Batterymarch Sts., Boston, Mass.

The Wonderful **"AUTO-MARINE MOTOR"**

$37.50



ENGINE ONLY

Weight 37½ lbs.
Height 11¼ in.

Convert Your Row Boat Into a LAUNCH

Rated at 1 h. p. Has shown nearly 2 h. p. No valves, gears, springs or cams. Jump spark. Reversible. Speed control. Only three moving parts. Could not be made better if it cost five times as much. **ORDER NOW**—they are selling so fast you may be disappointed later.

Auto-Marine Motors from 1 to 20 h. p.

Detroit Auto-Marine Co., 75 E. Congress St., Detroit, Mich.
Formerly Detroit Lackawanna Co.

BABBITT METALS.—SIX IMPORTANT formulas. SCIENTIFIC AMERICAN SUPPLEMENT **1123.** Price 10 cents. For sale by Munn & Co. and all newsdealers. Send for catalogue.



Motor-Cycle Castings

Build Your Own Engine

1¾ H.P. Castings, iron cases,	$8.00
1¾ H.P. Castings, aluminum cases,	12.00
2 H.P. Castings, iron cases,	12.00
2 H.P. Castings, aluminum cases,	15.00
2½ H.P. Castings, iron cases,	12.00
2½ H.P. Castings, aluminum cases,	15.00
4 H.P. Castings, iron cases,	22.50
4 H.P. Castings, aluminum cases,	25.00
5 H.P. double cyl. castings, iron,	25.00
5 H.P. double cyl. castings, alum.	27.50

Air or water-cooled, complete with blue prints. 150-page Motor-Cycle Supply Catalogue, 5c. to pay postage.

HARRY R. GEER CO.. 1015, Pine St., St. Louis, U.S.A.

The Most Modern Marine Motor



having the most rapid speed and weighing least per h. p. and possessing the fewest parts is the **Van Auken Motor.** No vibration, easy to operate, simple, reliable, clean, Great power. Perfect control. Always ready. Every stroke cleans the cylinder.

VAN AUKEN-CLEVAUC CO.
Yonkers, N. Y., U. S. A.



Largest Air-Cooled Stationary Engine made.

Bore 6 x 6 inches. Cools perfectly.

No engine ever constructed with so few working parts.

Ground joints.

No packing used.

Weight 800 lbs.

5 H. P. Gasoline

AIR-COOLED MOTOR CO.
LANSING, MICH.

Hydrozone

Cures

Sore Throat

A Harmless Antiseptic.

Endorsed by the medical profession. Send ten cents to pay postage on **free trial bottle.** Sold by Leading Druggists. Not genuine unless label bears my signature:

Prof. Charles Marchand

Dept. U, **63 Prince St., N. Y.**

Write for free booklet on Rational Treatment of Disease.

SMALLEY

MARINE GAS ENGINES



"It Beats the Devil"

A customer writes us as follows: "It beats the devil what a man will sometimes do to save money. Two years ago I purchased an engine of ——. The price was very low and I figured I would not be much out of pocket even if the engine was a failure, but I was wrong; I paid nearly twice the price of the engine trying to get satisfaction out of it. Neither could I get any satisfaction from the people who built the engine. I guess they figured they sold it so cheap they couldn't afford to pay postage answering my letters. Last year I was again attracted by another 'something for nothing' proposition and got sold again. I believe I now know the difference between a cheap motor and a good one. A number of your machines are used in boats here on the river and I know what they are. Send me your latest catalogue and I will place order within ten days for one of your 9 horse power double-cylinder engines."

The above letter is a fair sample of similar experiences that constantly come to our notice. Perhaps you are in the same boat. In any event, if you are interested in marine motors, send 10 cents in stamps and we will forward our 84-page handsomely illustrated 1905 catalogue. Address Dept. W.

SMALLEY MOTOR CO., LTD., Bay City, Mich., U. S. A.
Member of the National Ass'n of Engine and Boat Mnfrs.

All you have guessed about life insurance may be wrong. If you wish to know the truth, send for "The How and the Why." It is issued free by the

PENN MUTUAL LIFE
PHILADELPHIA



An Automatic Pump

that works wherever there is a spring, creek or pond. It costs but little and works day and night without attention or expense. **The Niagara Hydraulic Ram,** USED AND ENDORSED BY THE U. S. GOVERNMENT. Is made in all sizes. Free booklet and terms to agents upon request.

Niagara Hydraulic Engine Co
140 NASSAU ST., NEW YORK
Factory Chester, Pa.

An Ideal Electric Light Engine

because of its simplicity, safety and reliability under all conditions; because it is built on tried principles after years of experiments is the

Universal Kerosene Engine.

Automatic in operation easily started, and runs steadily and at a comparatively high rate of speed at a cost of less than one point of kerosene oil per actual horse power hour. Praised wherever used. Highest efficiency at lowest cost. For prices and terms address.

UNIVERSAL KEROSENE ENGINE CO.
6, 8 and 10 First St., New York

Spittoon, A. Garfein	796,315
Spring motor, C. Adelhelm	795,806
Sprinkling device, powder and other material, H. C. Sanders	796,256
Square, C. J. Baumgartner	796,030
Stacker, hay, W. C. Kyle	795,988
Stamp, hand, W. Laycock	796,132
Stamp holder, C. Grunder	796,324
Stamp, printing, W. Laycock	796,131
Staves or blanks, machine for making barrel, E. E. Bartholomew	796,176
Steam boiler, C. A. Sturm	796,265
Steam eliminator, W. Lloyd	796,231
Stereotype casting boxes, means for cooling, W. Scott	796,091
Stocking supporter, C. W. Stimson	795,944
Stone mold, artificial, G. Doughty	795,900
Stone, treating, H. Ryan	796,253
Storage and preserving can, vacuum, J. M. Stukes	796,369
Stove and fireplace, open, E. Hennigar	796,331
Stove grate, vapor, W. H. Wilder	796,380
Stove, oil, W. H. Wilder	796,272
Stoves, gas, gasolene, and oil heating, J. W. Neumann	796,347
Stovepipe coupling, H. H. Orr	796,084
Straw feeder and band cutter, E. J. Vraalstad	796,376
Strength testing machine, coin controlled, W. W. Rosenfield	796,358
Stuffing box, hydraulic cylinder, T. E. Holmes	796,211
Supporter, A. Zangmeister	796,278
Surface dressing machine, D. Mathews	795,997
Swinging reclining chair, I. Z. Merriam	795,922
Switch lever lock, W. J. Bush	796,292
Switch operating mechanism, H. Dickinson	796,196
Switches, electrically controlled shifting system for track, T. Bovey	796,287
Table, E. Murray-Aaron	796,239
Tacking tool, A. Hebert	795,912
Tacking tool, hand, C. Paulsen	795,928
Tankometer, H. A. House	795,833
Tanning apparatus, W. R. Smith	795,942
Telegraph receiver, electric wave, C. L. Fortier	796,403
Telegraphy, syntonic space, Lodge & Muirhead	795,843
Telephone cut-out, J. A. Tornquist	796,022
Telephone exchange, H. G. Webster	795,872
Telephone exchange apparatus, E. E. Ries	796,089
Telephone exchange system, E. R. Corwin	795,961
Theater appliance, H. A. Shaules	796,362
Thermal protector, automatic restoring, F. B. Cook	796,297
Thill coupling, W. A. Buchanan	796,185
Three wire meter, T. Duncan	796,070
Threshing machine, W. Nighswonger	796,348
Tile machine, F. S. Hutchinson	796,124
Time controlled apparatus, C. B. Salyer	796,361
Tire, F. H. Bowly	796,400
Tire, emergency, H. C. Waite	796,167
Tire, vehicle, F. M. Hilton, et al	796,073
Tire, vehicle wheel, H. Garner	795,906
Tool, compound, J. W. Quilling	796,352
Tool, electromagnetically operated reciprocating, H. S. Sherman	796,259
Tool, fluid pressure operated, C. H. Johnson	796,217
Tool, fluid pressure operated, H. H. Vaughan	796,374, 796,375
Tool, percussive hand, H. Potter	796,350
Toothpick machine, H. E. Barlow	796,394
Toy snap back ball, J. B. Cook	795,960
Transmitter attachment, S. A. Beyland	795,888
Tray supporter, E. E. Robertson	796,357
Tray, waiter's, I. A. Merriman	796,234
Trestle, extensible, W. C. Kremkau	795,987
Trolley brake and take-up mechanism, combined, H. B. Clarke	796,295
Trolley retrieving device, H. B. Clarke	796,296
Trolley wheel bushing, F. M. Carroll	796,188
Turbine, internal combustion, P. Billinghurst	795,889
Turbine, steam, A. Kunz	796,336
Twine holder, L. M. Corbin	796,298
Type, apparatus for equably justifying composed lines of, H. J. S. Gilbert-Stringer	796,318
Typewriting machine, O. C. Kayle	796,075
Typewriting machine, G. A. Seib	796,092
Typewriting machine, P. Thommen	796,163
Typewriting machine tabulating mechanism, G. W. Singleton	796,020
Umbrella handle, detachable, J. B. Rosenstein	796,251
Underreamer, E. Double	796,197
Valve, O. H. Mueller	795,999
Valve, A. L. Canfield	796,111
Valve operating device, automatic, H. C. Klein	795,840
Valve, pressure controlled, E. F. Osborne	795,856
Valve regulating device, filling, C. A. Carlson	796,293
Valve, self closing, A. O'Brien	796,005
Valve, steam engine slide, L. J. W. H. Giffhorn	796,317
Vapor generating device, J. H. Tuttle	796,372
Vegetable sacking device, N. Lofstam	796,082
Vehicle body, W. E. Stewart	795,868
Vehicle driving gear, motor, H. T. Hansen	796,121
Vehicle, motor, F. Karmeli	796,222
Vehicle spring, Jackson & Paulson	796,216
Vehicle spring, N. T. Harrington	796,405
Vehicles or vessels, power transmission in self propelled, C. S. Schultz	795,862
Vending apparatus, coin operated, J. W. Patterson	796,010
Vending machine, coin actuated, E. Buck	795,891
Vending machine stand, J. E. Packard	796,007
Vessel, metallic, C. M. Perkins	795,930
Voting machine, W. H. Daily	796,115
Wagon brake, W. H. Harris	796,328
Wagon, dumping, R. Philpot	796,243
Wagon for transporting heavy materials, R. K. Dent, et al	795,963
Washing machine, A. E. Hoover	795,978
Watch stem winding mechanism, R. L. Taft	796,162
Water, purifying, H. Reisert	796,087
Water supply system, X. Caverno	795,892
Watering system and nozzle for greenhouses, L. Wittbold	796,027
Water tight butt joint, F. C. Kelsey	795,839
Wheat, flour, or other cereals, apparatus for improving, bleaching, or conditioning, W. T. Mercier	796,340
Wheat, flour, or other cereals, improving, bleaching, or conditioning, W. T. Mercier	796,339
Whiffletree hook, W. R. Brueske	796,291
Whiffletree hook, J. Gansley	796,314
Winding apparatus, C. W. Hubbard	795,980, 795,982
Wire drawing machine, A. Smith	796,261
Wire fabric, J. F. McClatchey	795,846
Wire splicing machine, J. Heyde	795,832
Wiring, pipe cap for outdoor, W. H. Vibber	796,269
Wrench, O. G. Guss	796,206
Wrench, E. Enderes	796,305
Wrench, J. H. Shepherd	796,363
Wrench, Thomson & Despond	796,371

TRADE MARKS.

Antiseptic fluid for internal and external use, Mulhens & Kropff	44,947
Baking powder, J. C. Grant Commercial Co.	45,039
Beer, Ferd. Heim Brewing Co.	45,010
Beer, McAvoy Brewing Co.	45,011
Boots and shoes having kid or calfskin uppers, T. S. Ruddock & Son	44,930
Boots and shoes, leather, L. Frank	44,929
Boots and shoes made of leather and of leather and cloth, A. E. Little & Co.,	44,931, 44,932
Bottle stoppers, Bernardin Bottle Cap Co.	45,050
Bran, middlings, mixed feed, and red dog, Listman Mill Co.	45,022
Bread, Listman Mill Co.	45,023
Bread, A. E. Suydam	45,024
Buggies, H. H. Babcock Co.	44,956
Candies, Hawley & Hoops	45,032
Candy, Smith & Peters	45,035
Candy, mint, A. P. Richardson	45,034
Candy, plaited mint and other, A. P. Richardson	45,033
Canned corn, succotash, lima beans, and blueberries, H. C. Baxter & Bro.	45,027
Canned fruits and vegetables, H. C. Baxter & Bro.	45,026
Canned fruits and vegetables, Bloomington Canning Co.	45,028
Carpets, rugs, mats, and art squares, American Grass Twine Co.	45,047
Cartridges and cartridge shells for small arms, Winchester Repeating Arms Co.	44,939
Cartridges for breech loading firearms, Winchester Repeating Arms Co.	44,937

6% Real Estate Gold Bonds

Conservative investors are offered an opportunity to purchase First Mortgage Bonds secured on income paying real estate in Chicago in amounts of $100, $500 and multiples that net Six per cent. to the purchaser. The illustrations show two of the buildings on which we have loans. We have had many years' experience making, and selling locally, these First Mortgage Bonds and take this method of offering them generally to the public. We have never yet had to foreclose any of the mortgages secured by these bonds, and none of our clients have ever lost a dollar, either in interest or principal, on account of these investments.

We cheerfully recommend them as being safe as to principal and sure and prompt as to interest. We collect the interest and otherwise look after the investment entirely free of charge to the purchaser, deriving our profit from the borrower. The Chicago Title and Trust Company, with a capital of $5,000,000.00, guarantees the title to these properties and certifies to the fact that the Bonds are each and every one a first lien on the property described in the bond.

We invite correspondence of persons who want Safety and Six per cent.

JENNINGS REAL ESTATE LOAN COMPANY
Suite 509, First National Bank Building, CHICAGO

ROAD BUILDING MACHINERY AND CONTRACTORS SUPPLIES.
ACME ROAD MACH'Y CO., FRANKFORT, N.Y. U.S.A.

Men Turn as by a Common Impulse
To Safety from Disease Germs.

The Buffalo Sanitary Sterilizer sterilizes Towel, Razors, Cup, etc., in less than one minute. This machine will do the work of a Barber Shop up to 10 chairs. The only Sterilizer with separate chambers. Each doing its own work. Hot Water and **Towels** with no trouble nor expense. The water is always pure and can be used for lather or any other purpose. Implements always in antiseptic condition. Partner with $10,000 wanted.

KINGORY MANUFACTURING CO.
1443-1459 Niagara St., Buffalo, N.Y.

Brighter
than electricity or acetylene --cheaper than kerosene--makes and burns its own gas.
No GREASE, DIRT, SMOKE or ODOR.
A safe, powerful, white, steady light --durable and handsome. Over 100 styles--every lamp warranted.
AGENTS WANTED EVERYWHERE.
THE BEST LIGHT CO., 87 E. 5th St., Canton, O.
Owners of Original Patents.

WARREN'S
NATURAL ASPHALT SAND SURFACED
ROOFING

Apply it yourself. Makes a finished gravel roof. Comes ready to lay in rolls of 108 square feet. Write for sample, circular and prices. **Warren Chemical and Mfg. Co., 18 Battery Pl., New York**

ELECTRICAL APPARATUS REPRESENTED by Conventional Diagrams in Drawings.—Fifty diagrams showing the usual method of illustrating electrical apparatus in drawings. A labor saving paper. Contained in SUPPLEMENT 1106. Price 10 cents. For sale by Munn & Co. and all newsdealers.

STA-RITE "STAYS RIGHT THE LONGEST"

You get the right length and type in the "Sta-Rite" Ignition Plug. Regular Porcelain, $1.50; Mica, $1.75. Forty-four sizes. They're made for the motors.
The R. E. Hardy Co., 225 West Broadway, New York

STARRETT TOOLS are the standard for Accuracy, Design, Workmanship and Finish.
Send for Free Catalogue No. 17B, of up-to-date tools for mechanics.
The L. S. Starrett Co., Athol, Mass., U. S. A.

A Loose Leaf Book



PERFECTLY FLAT-OPENING AND SELF-INDEXING

Most convenient for price books, route books, pocket ledgers, meter books, engagement books and all forms of records which should be kept in convenient, accessible form. Better than any card index. These "Unimatic" books are bound in full, genuine, flexible, black leather, are **perfectly flat opening** and sheets may be instantly inserted or removed from any part.

Any of the following sizes will be sent postpaid on receipt of price:

USE	No.	Binding Edge	Size of Sheet	Capac. of Cover: Inches	Capac. of Cover: Leaves	Complete
Vest Pocket	912	2	2 x 4	¼	50	$0.85
" "	4412	4½	4½ x 2½	⅛	50	.95
Coat Pocket	612	6	6 x 3½	⅛	50	1.20
" "	532	5½	5½ x 3	⅛	125	1.70
" "	632	6⅝	6⅝ x 3⅜	⅛	125	1.75
" "	7732	7⅛	7⅛ x 4⅛	⅛	125	2.10
Desk	1132	11	11 x 8½	¼	125	3.90

19 other sizes carried in stock

Stock ruling: Quadrille, Unruled, Dollars and Cents, Faint lines, Double Entry Ledger and 4-Column Price-Book Ruling.

Send for sample sheets and complete catalogue of largest line of loose-leaf devices in the world.

Sieber & Trussell Mfg. Co., 4002 Laclede Ave., St. Louis

60 YEARS' EXPERIENCE

PATENTS

TRADE MARKS
DESIGNS
COPYRIGHTS &C.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. HANDBOOK on Patents sent free. Oldest agency for securing patents.

Patents taken through Munn & Co. receive *special notice*, without charge, in the

Scientific American.

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & Co. 361 Broadway, **New York**
Branch Office, 625 F St., Washington, D. C.

Rushton Lengths 15, 16, 17, 18 Feet **Canoes**

INDIAN GIRL MODEL

As rapid in delivery as she is speedy in the water—no delay—immediate shipments—strong, light and graceful. Built of seasoned cedar—covered with best quality of canvas. Price, packed, $32 to $44. Send for catalogue of Dinghies, pleasure boats, all-cedar and canvas-covered canoes, oars, paddles, sails and fittings. Write to-day.

J. H. RUSHTON, 819 Water Street, Canton, N.Y.

THE HARRINGTON & KING PERFORATING CO. PERFORATED METAL OF EVERY DESCRIPTION, FOR ALL USES. 223 N. UNION ST CHICAGO, ILL.

Agents Wanted

in every railway shop to solicit subscriptions for the

Railway Master Mechanic

ONE DOLLAR A YEAR

LIBERAL COMMISSION TO AGENTS

.... ADDRESS ....

Railway Master Mechanic

Security Building CHICAGO — Vanderbilt Building NEW YORK

Men and boys wanted to learn plumbing trade, great demand for graduates $4.00 to $5.00 day. Many complete course two months. Graduates admitted to Union and Master Plumbers Association. COYNE BROS. CO. PLUMBING SCHOOLS, New York, Cincinnati, St. Louis. For free catalogue, address 239 Tenth Avenue, New York,

SPECIAL MANUFACTURING. DIES AND STAMPINGS TO ORDER. SPEC'L MACHINERY-MODELS-EXPERIMENTAL WORK. DROP FORGING DIES AND DROP FORGINGS. HARDWARE SPECIALTIES ETC. MANF'D TO ORDER. SEND SAMPLES OR DRAWINGS FOR ESTIMATES. WRITE FOR OUR BOOKLET. THE GLOBE MACHINE & STAMPING CO. 970 HAMILTON ST., CLEVELAND, OHIO.

ICE MACHINES and Bottlers' Machinery. **Corliss Engines,** Brewers' Machinery. THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery. E. V. BILLAARD, 24 Frankfort Street, New York.

Dies, Tools, Models and Special Machinery. Metal Specialties and Stampings Manufactured. HOEFT & MOORE, Chicago, U. S. A. OFFICE: 35-41 FIFTH AVENUE. WORKS: INDIANA & FRANKLIN STREETS.

BALLOONS Aeronaut L. Stevens, Box 181 Madison Sq., N. Y.

WORKING and PATENT DRAWINGS. G. M. MAYER, M.E., 1131 Monadnock Bl., Chicago, Ill.

CALIFORNIA Farm Bargains. Send for monthly catalogs. C. M. Wooster, S. Francisco.

RUBBER. Expert Manufacturers Fine Jobbing Work

PARKER, STEARNS & SUTTON, 228-229 South St., New York

THE SCHWERDTLE STAMP CO. STEEL STAMPS, LETTERS & FIGURES. BRIDGEPORT, CONN.

EXPERIMENTAL WORK Scientifically and accurately executed. Models and small machinery perfected. STENDICKE & VOLKMER, 61 Fulton Street. Telephone 5655 John.

Experimental & Model Work

Cyr. & advice free. Wm. Gardam & Son, 45-51 Rose St., NY

NOVELTIES & PATENTED ARTICLES MANUFACTURED BY CONTRACT. PUNCHING DIES, SPECIAL MACHINERY. E. KONIGSLOW STAMPING & TOOL WORKS, CLEVELAND, O.

COLT'S POWDER & BALL REVOLVERS U. S. Army, 44 caliber, and carried as side arms by officers in Civil War. 6-shot, with 7½-in. blued barrels. **Price $2.50.** Send 3c. stamp for complete catalog and bargain sheet. **Chas. J. Godfrey Co.,** 4 Warren St, N.Y.

If You Have OLD ACCOUNTS, Claims or Notes to collect in any part of the world, address W. E. S. JARRETT, Specialist (Reference: Boatmen's Bank.) Laclede Bldg., ST. LOUIS

AUTO STORAGE BATTERIES ALL KINDS THE WILLARD STORAGE BATTERY CO. CLEVELAND O.

AUTHORS Send us your MS. If worthy of cloth binding, we will publish it. **To Publishers:** Facilities for handling large editions. Pleased to quote you. Bank references. MAYHEW PUB. CO., 96-100 Ruggles St., Boston, Mass.

INVENTORS.—Our specialty is practically developing inventions. Design and build special, plain and automatic machinery, presses, dies, models, patterns and jigs. Send for Booklet No. 5. A. NACKE & SON, 236-42 S. 9th St., Philadelphia, Pa

The Monthly Journal **CONCRETE** is the standard publication upon Portland cement construction, and invaluable to cement workers, engineers and contractors. Send $1.00 for a year's subscription or write for special offer. **Concrete Publishing Co., Dept. F, Detroit, Mich.**

Magical Apparatus. Grand Book Catalogue. Over 700 engravings 25c. Parlor Tricks Catalogue, free. MARTINKA & CO., Mfrs., 493 Sixth Ave., New York.

Telegraphy Circular free. Wonderful automatic teacher. 5 styles $2 up. **OMNIGRAPH CO.,** Dept. 52, **39 Cortlandt St., New York.**

GINSENG $25,000 made from one-half acre. Easily grown throughout the U. S. and Canada. Room in your garden to grow thousands of dollars' worth. Roots and seeds for sale. Send 4c. for postage and get our booklet D N telling all about it. McDowell Ginseng Garden, Joplin, Mo.

TYPEWRITERS ALL MAKES All the Standard machines SOLD or RENTED ANY. WHERE at HALF MANUFACTURERS' PRICES, Shipped with privilege of examination. Send for Cat. **Typewriter Emporium,** 203 LaSalle St., Chicago

IF YOU SHOOT A RIFLE, *Pistol* or *Shotgun*, you'll make a **Bull's Eye** by sending three 2c. stamps for the *Ideal Hand-book* "A," 126 pages **FREE.** The latest Encyclopedia of *Arms, Powders, Shot and Bullets.* Mention SCIENTIFIC AMERICAN. Address IDEAL MFG. CO., 26 U St., NEW HAVEN, CONN., U.S.A.



Type G Engine, 8 to 100 H. P.

OLDS ENGINES

Economical Power

In sending out their last specifications for gasoline engines for West Point, the U. S. War Department required them "to be **Olds Engines** or equal." This speaks volumes for our engines. It means they excel all others or the U. S. Government would not demand them.

They are the horizontal type, 2 to 100 H. P., and are so simply and perfectly made that it requires no experience to run them, and

Repairs Practically Cost Nothing.

Send for a catalogue of our Wizard Engine, 2 to 8 H. P. (spark ignition system, same as in the famous Oldsmobile) the most economical small power engine made; fitted with either pump-jack or direct connected pump; or our general catalogue showing all sizes.

Olds Gasoline Engine Works, Lansing, Mich.

New York Agents, R. H. DEVO & Co., Binghamton, N. Y.

DIRECT FROM THE FACTORY

THIS DESK shipped anywhere in the United States upon receipt of **$3.00** **Examine Carefully** and if found to be A-1 in every respect, pay the balance $12.00 and the freight, and you will have the greatest desk value ever offered. This desk is made of selected Oak throughout. It is 48 inches long, and is finished golden. Has pen racks, extension slides, book stalls, etc. All drawers lock by closing curtain. Nothing to equal it has ever been offered heretofore for less than $25.00 to $30.00. Write for Desk Catalogue. Address CENTRAL MANTEL CO., 1212 Olive St., ST. LOUIS



LUFKIN TAPES AND RULES ARE THE BEST. For sale everywhere. Send for Catalog No. 16. **LUFKIN RULE CO.** Saginaw, Mich., U. S. A. New York and London.



Send the Name of Your Car or engine, and we will send full information about the **Apple Automatic Sparker.** The best storage battery charger for automobile, launch or gas engine. Address, **The Dayton Electrical Mfg. Co.** 98 Beaver Bldg. Dayton, Ohio.

Learn Telegraphy and R. R. Accounting

$50 to $100 per month salary assured our graduates under bond. You don't pay us until you have a position. Largest system of telegraph schools in America. Endorsed by all railway officials. *Operators always in demand.* Ladies also admitted. Write for catalogue. MORSE SCHOOL OF TELEGRAPHY Cincinnati, O., Buffalo, N. Y., Atlanta, Ga., La Crosse, Wis., Texarkana, Tex., San Francisco, Cal.

AUTOMOBILE OWNERS, DRIVERS, Repairmen, Chauffeurs, and others wanted all over the country. 50,000 machines built this year in United States, affording great opportunities for trained men. Six cents a day will qualify you for good wages in this growing field. For full particulars, address Dept. A157, The Correspondence School of Automobile Engineering, Akron, Ohio.

Send for this Print your own cards, circulars, &c. Press **$5.** Small newspaper press **$18.** Money saver. Print for others, big profits Typesetting easy, printed rules sent. Write to makers for catalog, presses, type paper, &c. THE PRESS CO., MERIDEN, CONN.



A MONEY MAKER Hollow Concrete Building Blocks, Best, Fastest. Simplest, Cheapest Machine. Fully guaranteed. **THE PETTYJOHN CO.** 615 N. 6th Street, Terre Haute, Ind.

læŋgwrdʒɪz BEETHOVEN PICTURE, by Balestrieri of Paris, in sepia or black, postfree for two dimes or 20 cents in stamps LANGUAGES PRINTING COMPANY Languages Building, 15 West 18th St., New York

BRAZE CAST IRON WITH BRAZIRON Cheap, easy. Send 12 cents in stamps for information, testimonials and samples of Braziron and flux sufficient for several jobs. THE A. & J. MANUFACTURING COMPANY 9 S. Canal St., Chicago, Ill.

Cartridges, paper shell, Winchester Repeating Arms Co. 44,938, 44,940
Cement, Portland, Sandusky Portland Cement Co. 44,957
Cigars, Y. Pendas & Alvarez..... 44,959 to 44,969
Cigars, Martinez Havana Co..... 44,972
Cigars, Sanchez & Haya Co..... 44,973
Coal, Smoky Hollow Coal Co..... 45,062
Coal of a bituminous or semibituminous nature, Castner, Curran & Bullitt 45,016, 45,017
Collars and cuffs, Cluett, Peabody & Co.... 44,995
Corsets, Bay State Corset Co..... 44,984
Corsets, A. Ottenheimer 45,043, 45,044
Cure for all stomach and bowel troubles, F. W. Speidel 44,946
Dog collars and leashes, J. Cogan..... 44,974
Dress shields and protectors, Canfield Rubber Co. 44,982, 44,983
Dress suit cases, valises, and hand grips, Capitol Case Co. 45,051
Electrical curative apparatus for treatment of nervous, rheumatic, and similar diseases, Seeger & Clarke 45,059
Electrical switches, circuit breakers, etc., automatic, Cutter Electrical and Manufacturing Co. 44,954
Finger rings, Sinnock & Sherrill..... 44,935, 44,936
Flour, wheat, D. M. Baldwin, Jr..... 45,018
Flour, wheat, Bunker Hill Milling Co..... 45,019
Food for animals, prepared, American Milling Co. 45,020
Fruits and berries, dried, R. C. Williams & Co. 45,025
Gin, Corning & Co. 44,999, 45,000
Gloves, Carson Glove Co..... 44,996, 44,997
Hair pins, De Long Hook & Eye Co..... 44,976
Hats, F. W. Seybel Co..... 44,986
Hats, J. Marshall & Bros..... 44,988
Hats, American Hat Co. 44,989
Hats and caps for boys and girls, L. Frank. 44,987
Hats, soft and stiff fur felt, No Name Hat Manufacturing Co. ..... 44,990 to 44,994
Horse nails, Livingston Nail Co..... 44,953
Insecticide, American Horticultural Distributing Co. 45,014
Journal, weekly, Inland Farmer Publishing Co. 45,015
Laces, boot, shoe, and corset, Fletcher Manufacturing Co. 44,977
Lead, white, Wetherill & Bro..... 45,054
Leno fabric, H. W. Smith..... 44,981
Linings, dress, I. E. Palmer..... 44,979
Lye and potash, Champion Chemical Works. 45,040
Lye or caustic soda, caustic, Pennsylvania Salt Manufacturing Co. 45,042
Lye, powdered, Champion Chemical Works.. 45,041
Malt extract, Robert Smith Ale Brewing Co. 45,012
Matches, Indiana Match Co. 45,031
Medical preparations for catarrh, F. A. Luyties 45,013
Medicinal tablets for the cure of diseases of women, Piso Co..... 44,948
Mucilage, adhesive cements, glue, gums, etc., Arabol Manufacturing Co. 44,958
Musical instrument, nasal wind, J. J. Stivers 45,056
Overcoats, coats, vests, and trousers, men's and children's, Myers & Andrews..... 44,985
Paper and copying books, copying, William Mann Co. 44,938
Penholders, Eagle Pencil Co..... 44,926
Pens, metallic, Eagle Pencil Co..... 44,942
Pencils, lead, Eagle Pencil Co..... 44,919 to 44,925
Pencils, lead, E. Faber 44,927
Pianofortes, William Knabe & Co. Manufacturing Co. of Baltimore City..... 45,057
Pianofortes, miniature grand, William Knabe & Co. Manufacturing Co. of Baltimore City 45,058
Plows, plowshares, moldboards, plow points, landslides, plow standards, beams, and handles, Oliver Chilled Plow Works.... 45,060
Poultry, Clarinda Poultry, Butter and Egg Co. 45,021
Printing plates, liquid preparation for cleaning stone and metal, E. F. Fischer..... 45,055
Rain proof textile fabrics, Griffon Co..... 44,978
Razors, A. Shaheen & Co..... 44,934
Refrigerators, Maine Manufacturing Co..... 45,048
Remedies for liver and kidney diseases, Pineule Medicine Co. 44,950
Remedies for the cure of diseases of the kidneys and blood, Pineule Medicine Co. 44,949
Remedy for diseases of the hair and scalp, Herpicide Co. 44,943, 44,944
Remedy for the relief of dyspepsia, C. E. Lavery 44,945
Salves, E. C. De Witt & Co..... 45,039
School bags, L. Frank 45,052
Sewing machine parts and attachments, Willcox & Gibbs Sewing Machine Co..... 44,952
Sheetings, Pilzer Manufacturing Co. 44,980
Shells and cartridges, shot, Winchester Repeating Arms Co. 44,941
Shoes, leather, E. Kiam 44,933
Skins, goat and kid, T. A. Herrman..... 44,975
Skirt and waist holders, Consolidated Safety Pin Co. 45,045
Soap, L. J. Maloney 45,030
Stoves, gas and oil, Grinberg Bros..... 44,955
Suits, boys', A. Shuman & Co..... 45,046
Tin plates, terne plates, tin taggers, black taggers, sheet metal, and sheet iron, E. L. Parker & Co..... 45,061
Tobacco, leaf, W. T. Grant & Co..... 44,970
Tobacco, smoking and chewing, Queen City Tobacco Co. 44,971
Varnishes, Charles H. Gillespie & Sons..... 45,053
Vases, urns, and jardinieres, Norse Pottery Co. 45,049
Whisky, Danciger Bros. 45,001
Whisky, Distillers Distributing Co..... 45,002
Whisky, P. Freiler 45,003
Whisky, W. H. Jones & Co..... 45,004
Whisky, Simon Bros. 45,005
Whisky, Union Distilling Co. 45,006
Whisky, W. L. Weller & Sons.....45,007 to 45,009
Whisky, Brown-Forman Co. 45,036
Whisky, G. F. Heublein & Bro.....45,037, 45,038

LABELS.

"Can't Bite a Bit," for a lotion, M. D. F. W. Rawlins 12,299
"Delicious Gillnet Salmon," for canned salmon, S. Schmidt & Co..... 12,297
"Eau de Resorcin," for hair tonic, C. L. Kehrer 12,298
"Idle Hours," for cigars, J. V. O'Connell.. 12,292
"It's Good," for bleached cotton, J. M. Robinson, Norton & Co..... 12,302
"Northern Queen Sugar Corn," for canned corn, United States Printing Co..... 12,296
"Pyramid Cream Corn," for canned corn, United States Printing Co..... 12,295
"Saratoga Arondack Ginger Ale," for ginger ale, Arondack Spring Co. 12,293
"Tetlow's Violet Borated Talcum Powder," for toilet powder, Tetlow Manufacturing Co. 12,300
"The American Workman's Brace," for suspenders, Knickerbocker Suspender Co.... 12,291
"Waukesha," for canned green peas, Waukesha Canning Co. 12,294
"Whitney's Reagent," for a reagent, Whitney Chemical Co. 12,301

PRINTS.

"In Days of Old and Chinck's Brother Backs, Congress Playing Cards," for playing cards, United States Playing Card Co... 1,393
"Purity Afloat," for toilet soap, C. W. Young & Co. 1,391
"Saratoga Arondack Water," for mineral water, Arondack Spring Co. 1,389
"Tige Stockings," for stockings, Lax & Strauss 1,392
"When You Think of Flour—Think of Gold Medal," for flour, Washburn-Crosby Co. 1,390

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.

Loftis System Diamonds On Credit

A Diamond is a shrewd investment to-day. Buy a Diamond on credit now. Diamonds win hearts. Write for our Catalog, 1000 illustrations. Select your Diamond. We will send it for examination. One-fifth the price to be paid when you receive the article. Balance in eight equal monthly payments.

The Old Reliable Original Diamond on Credit House.

LOFTIS BROS & CO. est 1858 DIAMOND CUTTERS Watchmakers, Jewelers. Dept. H180 92 to 98 State St. CHICAGO, ILL., U. S. A.

Let us send you Free Our Book on LIGHT



The Lindsay Light

It Tells How To Save Money

You may be losing money on light right now! You may be paying **too much** money for **too little** light!

You certainly are if you're using the ordinary open tip gas jet—the ordinary incandescent gas burner — or the ordinary incandescent electric.

We tell you in our Book on Light how to **save** from $5 to $100 a year and **obtain** from 3 to 20 times as much light as you'll get from the above kinds of light.

Simply by using the Lindsay Light—the great money saving light.

Which is **entirely different** from every other light in its mechanical construction—which you can easily put up yourself, and which we will send you complete, Burner, Mantle and Globe, express prepaid to your home for **$1.00** if your dealer doesn't handle them.

Just drop us a postal containing your address for our free book on Light which tells how to **save money.** Address

LINDSAY LIGHT CO.,

195-197 Michigan St., Chicago. 91 Chambers St., New York.

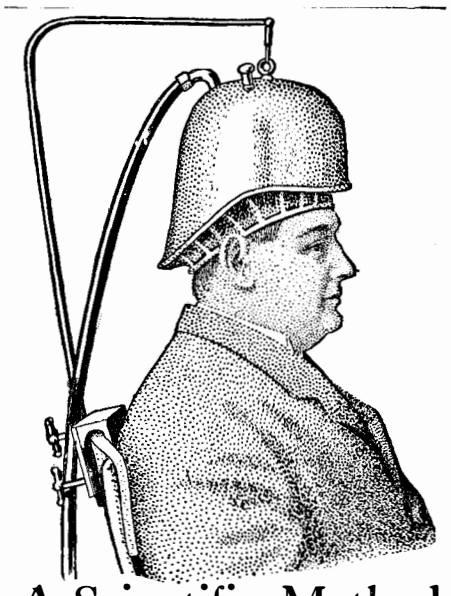

A Scientific Method of Growing Hair

The Evans Vacuum Cap provides the scientific means of applying to the scalp the common sense principles of physical culture.

Baldness and falling hair are caused by the lack of proper nourishment of the hair roots. This lack of nourishment is due to the absence of blood in the scalp—an abnormal condition. It is the blood which feeds the hair roots, as well as every other part of the body. If you want the hair to grow on the scalp the blood must be made to circulate there. It is exercise which makes the blood circulate. Lack of exercise makes it stagnant. The Vacuum method provides the exercise which makes the blood circulate in the scalp. It gently draws the rich blood to the scalp and feeds the shrunken hair roots. This causes the hair to grow.

Test it Without Expense

You can tell whether it is possible to cultivate a growth of hair on your head by ten minutes' use of the Evans Vacuum Cap. We will send you the Cap with which to make the experiment *without any expense to you.*

If the Evans Vacuum Cap gives the scalp a healthy glow this denotes that the normal condition of the scalp can be restored. A three or four minutes' use of the Cap each morning and evening thereafter will produce a natural growth of hair. If, however, the scalp remains white and lifeless after applying the vacuum, there is no use in trying further—the hair will not grow.

The Bank Guarantee

We will send you, by prepaid express, an Evans Vacuum Cap and will allow you ample time to prove its virtue. All we ask of you is to deposit the price of the Cap in the Jefferson Bank of St. Louis, where it will remain during the trial period, *subject to your own order.* If you do not cultivate a sufficient growth of hair to convince you that the method is effective, simply notify the bank and *they will return your deposit in full.*

A sixteen-page illustrated book will be sent you free, on request

Evans Vacuum Cap Co. 820 Fullerton Bldg. St. Louis



Orient Buckboard 4 H. P. **$375.** 35 Miles an Hour.

The Orient Buckboard

Simple, dependable—works so well everybody likes it. Here's one report: "We are much pleased.... It has climbed the steepest hills... and run beyond our expectations. Have had no extra expense and it runs better than when we first began." It beats half the big cars and costs no fortune. Four styles, $375, $450, $475, $525.

Desire to arrange for energetic representatives in unoccupied territory. Write for Agency proposition.

WALTHAM MANUFACTURING COMPANY
Factory, Waltham, Mass.
Address General Offices, 44 Broad Street, New York
Members of Association of Licensed Automobile Manufacturers.

To INVESTIGATE

The mechanically correct DURYEA, invariably is to purchase. **Duryeas** are different is the reason. Patented features make them for Comfort and Economy Supreme. Send for leaflet it Tells the Reason Why.

DURYEA POWER CO., 44-84 Aeyrud St., Reading Pa.



New Ice Machine

Patent Aug. Osenbrick, Bremen
U. S. Patent No. 729,398

Manufacturers taking any interest in a new patent for ammonia absorption, refrigerating or like machines, will please apply to

T. A., 50
66-68 Leonard St., N. Y. City



CHARTER

Stationaries, Portables, Hoisters, Pumpers, Sawing and Boat Outfits, Combined with Dynamos.

Gasoline, Gas, Kerosene.
Send for Catalogue.
State Power Needs.

CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

What Is Daus' Tip-Top?



TO PROVE that Daus' "Tip-Top" is the best and simplest device for making **100 copies** from pen-written and **50 copies** from typewritten original, we will ship complete duplicator, cap size, **without deposit,** on **ten (10) days' trial.**
Price $7.50 less trade discount of 33⅓ per cent. or $5 Net

The Felix A. B. Daus Duplicator Co., Daus Bldg., 111 John St., New York

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.

CRUDE ASBESTOS
DIRECT FROM MINES

PREPARED ASBESTOS FIBRE for Manufacturers use

R. H. MARTIN,
OFFICE, ST. PAUL BUILDING
220 B'way, New York.

LEARN TO BE A WATCHMAKER
BRADLEY POLYTECHNIC INSTITUTE



Formerly Parsons Horological Institute
PEORIA, ILLINOIS
LARGEST and BEST WATCH SCHOOL in AMERICA

We teach Watch Work, Jewelry, Engraving, Clock Work, Optics. Tuition reasonable. Board and rooms near school at moderate rates.

Send for Catalog of Information.

French Motors for Lighting Plants



The **"ASTER"** is the best French motor on the market for lighting houses, hotels, etc. Small, compact, simple and safe to operate. Motive power alcohol, oil or gas. 2 and 4 cylinders. Great power for small engines. Easy running. Write for illustrated Price List.

ASTER COMPANY
1659 Broadway NEW YORK CITY

THE Nulite Vapor GAS Lamps

For Home, Store and Street

We also manufacture Table Lamps, Wall Lamps, Chandeliers, Street Lamps, Etc. 100 Candle Power seven hours ONE CENT. No Wicks. No Smoke. No Odor. Absolutely safe. THEY SELL AT SIGHT. Exclusive territory to good agents. ☞ Write for catalogue and prices.

Chicago Solar Light Co., Dept. G, Chicago

MICROSCOPES

Our Microscopes, Microtomes, Laboratory Glassware, Chemical Apparatus, Chemicals, Photo Lenses and Shutters, Field Glasses, Projection Apparatus, Photo-Micro Cameras are used by the leading Laboratories and Government Departments Round the World. Catalogs free.

Bausch & Lomb Opt. Co.
ROCHESTER, N. Y.
New York Chicago Boston Frankfurt, G'y

PARALLEL CH·BESLY&Co CLAMPS ALL ANGLES SIDES Chicago U·S·A

15 to 21 Clinton Street.

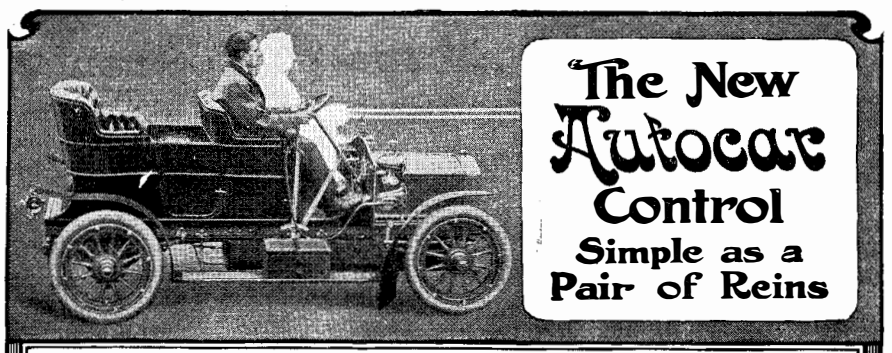

The New Autocar Control
Simple as a Pair of Reins

The control of Type XI Autocar brings automobile driving to the simplicity of horse driving. In the rim of the steering wheel, and forming parts of it, are set two grips, one at the right hand, one at the left. These two grips control the throttle and the spark, regulating the speed of the car from 3 to 35 miles an hour. This arrangement brings the steering and the speed regulating together, so that in all ordinary running the only position necessary for the hands is on the steering wheel.

To be sure this car has a gear shift lever and an emergency brake lever at the right of the driver. The gear shift lever, however, is needed only on particularly hard hills, or very bad bits of road. The car loaded with four passengers will climb nearly all hills on the high gear. The foot brakes being ample for all ordinary use, the emergency brake is rarely required. Hence we say that except in extreme cases only one position is required of the hands in driving Type XI Autocar.

This car has four cylinder vertical motor of 16-20 horse power, double side-entrance tonneau, and the smartest lines of any car. It is extremely quiet and vibrationless in running while having great power in proportion to its weight. Type XI Autocar is the ideal car for the man who wants an up-to-date, powerful, four passenger car without excessive weight. The price of Type XI is $2000. Catalogue giving full description of it and also of Type X Runabout $900, and Type VIII Tonneau $1400, together with name of dealer nearest you, sent free upon request.

THE AUTOCAR COMPANY, Ardmore, Pa.
Member Association Licensed Automobile Manufacturers.

Complete Only **$15.**

BURNS WOOD or COAL

JUST SEND ME ONE DOLLAR

and I will ship C. O. D. to any railroad station in the U. S. this fine Willard Steel Range Anyone can say they have the best range in the world, but I will furnish the evidence and leave the verdict to you. After you examine this range, if you are satisfied in every way, pay Agent $14.00 and freight, and you become the possessor of the best range in the world for the money. The range has six 8-inch lids; 18-inch oven; 15-gallon reservoir; large warming closet; top cooking service 30x34 ins. Guaranteed to reach you in perfect order. Shipping weight, 400 lbs. Thousands in use and every one of them giving satisfaction. Write for full description and testimonials.

WM. G. WILLARD
No. 12 WILLARD BUILDING
316-320 CHESTNUT STREET ST. LOUIS, MO.

The Watres Gas Engine Whistle

is an innovation for marine motoring. It is operated simply by spent gas and does not affect the running of the engine. Whistle blown by the touch of a cord at engineer's elbow. Blows simultaneously three tones of chromatic scale and can be clearly heard two miles away. Does away with all hand pumping. The device is simple, easily attached and has nothing to get out of order. It is absolutely safe and satisfactory. Thirty days' trial allowed, then, if not satisfactory, say so, and back goes your $35. Booklet on request.

GAS ENGINE WHISTLE COMPANY, 1137 Broadway, New York



The Modern Machines for Mechanics



Here are two of the most useful and indispensable machines. The cut on the left shows the best Bench Drill ever constructed for sensitive work. Drills from smallest size up to 5-16 inch. Spindle has Morse No. 1 taper hole and is counterbalanced by coil spring around feed lever shaft. Insures perfectly true and accurate work. The Twentieth Century Polishing Lathe, see cut on right, is one of many different styles and sizes of Polishing Lathes that we manufacture. We have them to run by foot or belt power, for use in all mechanic's lines. Send for catalogues B-15, C-15.

THE W. W. OLIVER MFG. CO., 1482 Niagara St., Buffalo, N. Y.



"STANDARD"
Two-Speed Automatic Coaster Brake Hub

Makes wheeling a delight, eliminates the drudgery. Do not waste money on experiments when you can buy a perfect attachment *all in* one hub. Our little booklet tells all about it and is mailed free. Write to-day.

STANDARD SPOKE AND NIPPLE CO. - Torrington, Conn.



WE GUARANTEE

OUR OUTFITS TO HANDLE MORE AIR FOR THE POWER CONSUMED THAN ANY OTHER SET OF THE SAME SIZE. TO BUY THEM IS GOOD **ECONOMY.** GENERATORS, VARIABLE & CONSTANT SPEED MOTORS

Rochester Electric Motor Co., 10-12 Frank Street, ROCHESTER, N. Y.

Opaque Projector

A Magic Lantern for showing Engravings, Prints, Cuts, Illustrations in Books, Models and Specimens on the Screen without previous preparation, brilliantly lighted and in natural colors. Send for circular.

Williams, Brown & Earle
Dept. 6, 918 Chestnut St., Philadelphia, Pa.

$100



3½ Actual h. p.

THE NEW PIERCE
3½ h.p. Gas or Gasoline Motor
IS A WONDER

It will develop more power with less fuel than any motor in the world. Built on modern lines, from the best material, and in every respect up to the very latest practice in Gas Engine construction. With ordinary care will last a life time.

We have been manufacturing Gas and Gasoline Motors for more than twenty years, and over 12,000 Pierce Motors are in use in all parts of the world. We know how and do build them right. **We guarantee them to give satisfaction; if not, send them back and we will refund your money.**

The Pierce Motors are the best in the world and cost less than the poorest. We also manufacture Launches, Marine Motors and Auto Boats. Send five cents in stamps to cover postage and we will send you our printed matter. Address Dept. 5.

PIERCE ENGINE COMPANY - - RACINE, WIS.

Safety of Operation

A Cadillac may safely be stopped, and can easily be started, while climbing the steepest grade—one of the many performances which show the safety of operation and demonstrate the unusual power of the Cadillac.

Chief among the notable features of the

CADILLAC

is its remarkably low cost of maintenance.

This economy is manifest not only in the cost of fuel and lubrication, but in repairs; for the Cadillac comes near to being actually *trouble-proof.* Never-failing serviceableness makes it the most satisfactory car to own; thorough excellence of workmanship and time-tried principles of construction make it the most economical.

Model F—Side Entrance Touring Car, shown above, $950.

Model B—Touring Car with detachable Tonneau, $900.

Model E—Light, stylish, powerful Runabout, divided seat, $750.

Model D—Four-Cylinder, 30 h. p. Touring Car, $2,800.

All prices f.o.b. Detroit.

Write for Catalog N, and address of nearest dealer, where you may see and try a Cadillac.

CADILLAC AUTOMOBILE CO., Detroit, Mich.
Member A. L. A. M.

New York Belting & Packing Co. Ltd.

Manufacturers of high grade Rubber Belting, Diaphragms, Dredging Sleeves, Emery Wheels; Air Brake, Steam, Suction and Garden Hose, etc., Mats, Matting, Interlocking Rubber Tiling.

Also manufacturers of moulded and special rubber goods of every description.

Write for catalogue.

91-93 Chambers St., New York

Instantly Puts Out All Kinds of Fires

Fire Dust Chemical Powder FIRE EXTINGUISHER

Does not injure furniture or fabric. Positively not dangerous in any way. DOES THE WORK IN LESS TIME, AT LESS COST, THAN ANY OTHER EXTINGUISHER. Always ready. Can be handled by anyone. You cannot afford to be without it. **Price $2.00.** Agents wanted. Write at once for terms.

THE FIRE DUST COMPANY
818 Bank of Commerce Building, St. Louis, Mo.



THE SUPPLEMENTARY SPIRAL SPRING

Absorbs all vibration. No jolts or rebounds. Acts alike under light and heavy loads. Stands the test, adds comfort and new delight to motoring. Saves engine, tires and springs. Will please you as hundreds of others. State make and model of your car.

SUPPLEMENTARY SPIRAL SPRING CO.
4529 Delmar Ave., St. Louis, Mo.

MAXIMUM POWER—MINIMUM COST



If you use a pump for beer, lard, acids, starch, petroleum, brewer's mash, tanner's liquor, cottonseed oil or fluids, hot or cold, thick or thin you want to get the

TABER ROTARY PUMP

which does the most work at the least expense. Simply constructed. Can be run at any desired speed. Perfectly durable. All parts are interchangeable. Needs no skilled workman. Defects guaranteed. *Catalogue free.*

TABER PUMP CO., 32 Wells St., Buffalo, N. Y., U. S. A.

JESSOP'S STEEL THE VERY BEST FOR TOOLS, SAWS ETC.
WM. JESSOP & SONS LD 91 JOHN ST. NEW YORK